


Toplite 100 Bi-Adjustable HALO - Black

Studio Artemide



IP20 

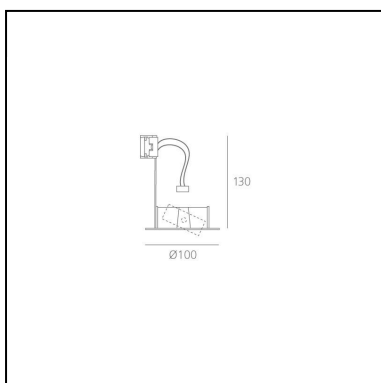

LUMINAIRE *

- Transformer availability: **Remote**
- Watt: **1xmax50W**
- Voltage: **12V**

* Photometric data may vary depending on the source installed. Light measurements are provided in relative form and technical lighting calculations may be updated according to the effective source used.

DESCRIPTION

A range of recessed downlights, fixed or adjustable, round or square, using 12V dichroic halogen lamps, HIPAR51 metal halide and 230-240V leds. Body in die-cast aluminium or steel, available in different colours. Multiple size options: ø88mm, ø100mm, ø125mm, ø158mm, 88x88mm and 95x95mm. Tilt angle of up to 70°, rotation of up to 355° depending on the version. Lamp holding ring made from aluminium, thermoplastic material or with coloured glass. Lamps can be maintained without the need for tools by a simple quarter turn rotation. Version IP44 comes with integral safety cover and sealed glass. Remote transformer. Complies with standard EN60598-1 and other specific standards.

FEATURES

- Product Code: **M042915**
- Colour: **Black**
- Material: **Die-cast Aluminium**
- Series: **Architectural Indoor**
- Environment: **Indoor**
- Area contract: **Hospitality, null, Retail, Residential**
- Emission: **Accent Lighting**
- design by: **Studio Artemide**

DIMENSIONS

- Diameter: **100 mm**
- Cutout diameter: **88 mm**
- Recessed depth: **130 mm**
- Inclination: **30**
- Rotation: **355°**
- Cutout shape: **Rounded**
- Weight: **kg 0.2**
- Glow Wire Test: **960°**

NOT INCLUDED SOURCES

- Category: **HALO**
- Number: **1**
- Lbs: **QR-CBC51**
- Watt: **35W**
- Socket: **GU5.3**
- Color Rendering: **100**
- Color temperature (K): **3000K**

Accessories



Electronic transformer 230-240V/12V. Class II.
Dimmable by trailing or leading edge external
dimmers. 10-60W. 123x32x23mm. M070211



TOPLITE - Louvre M081047