Antarktikós

Carlotta de Bevilacqua

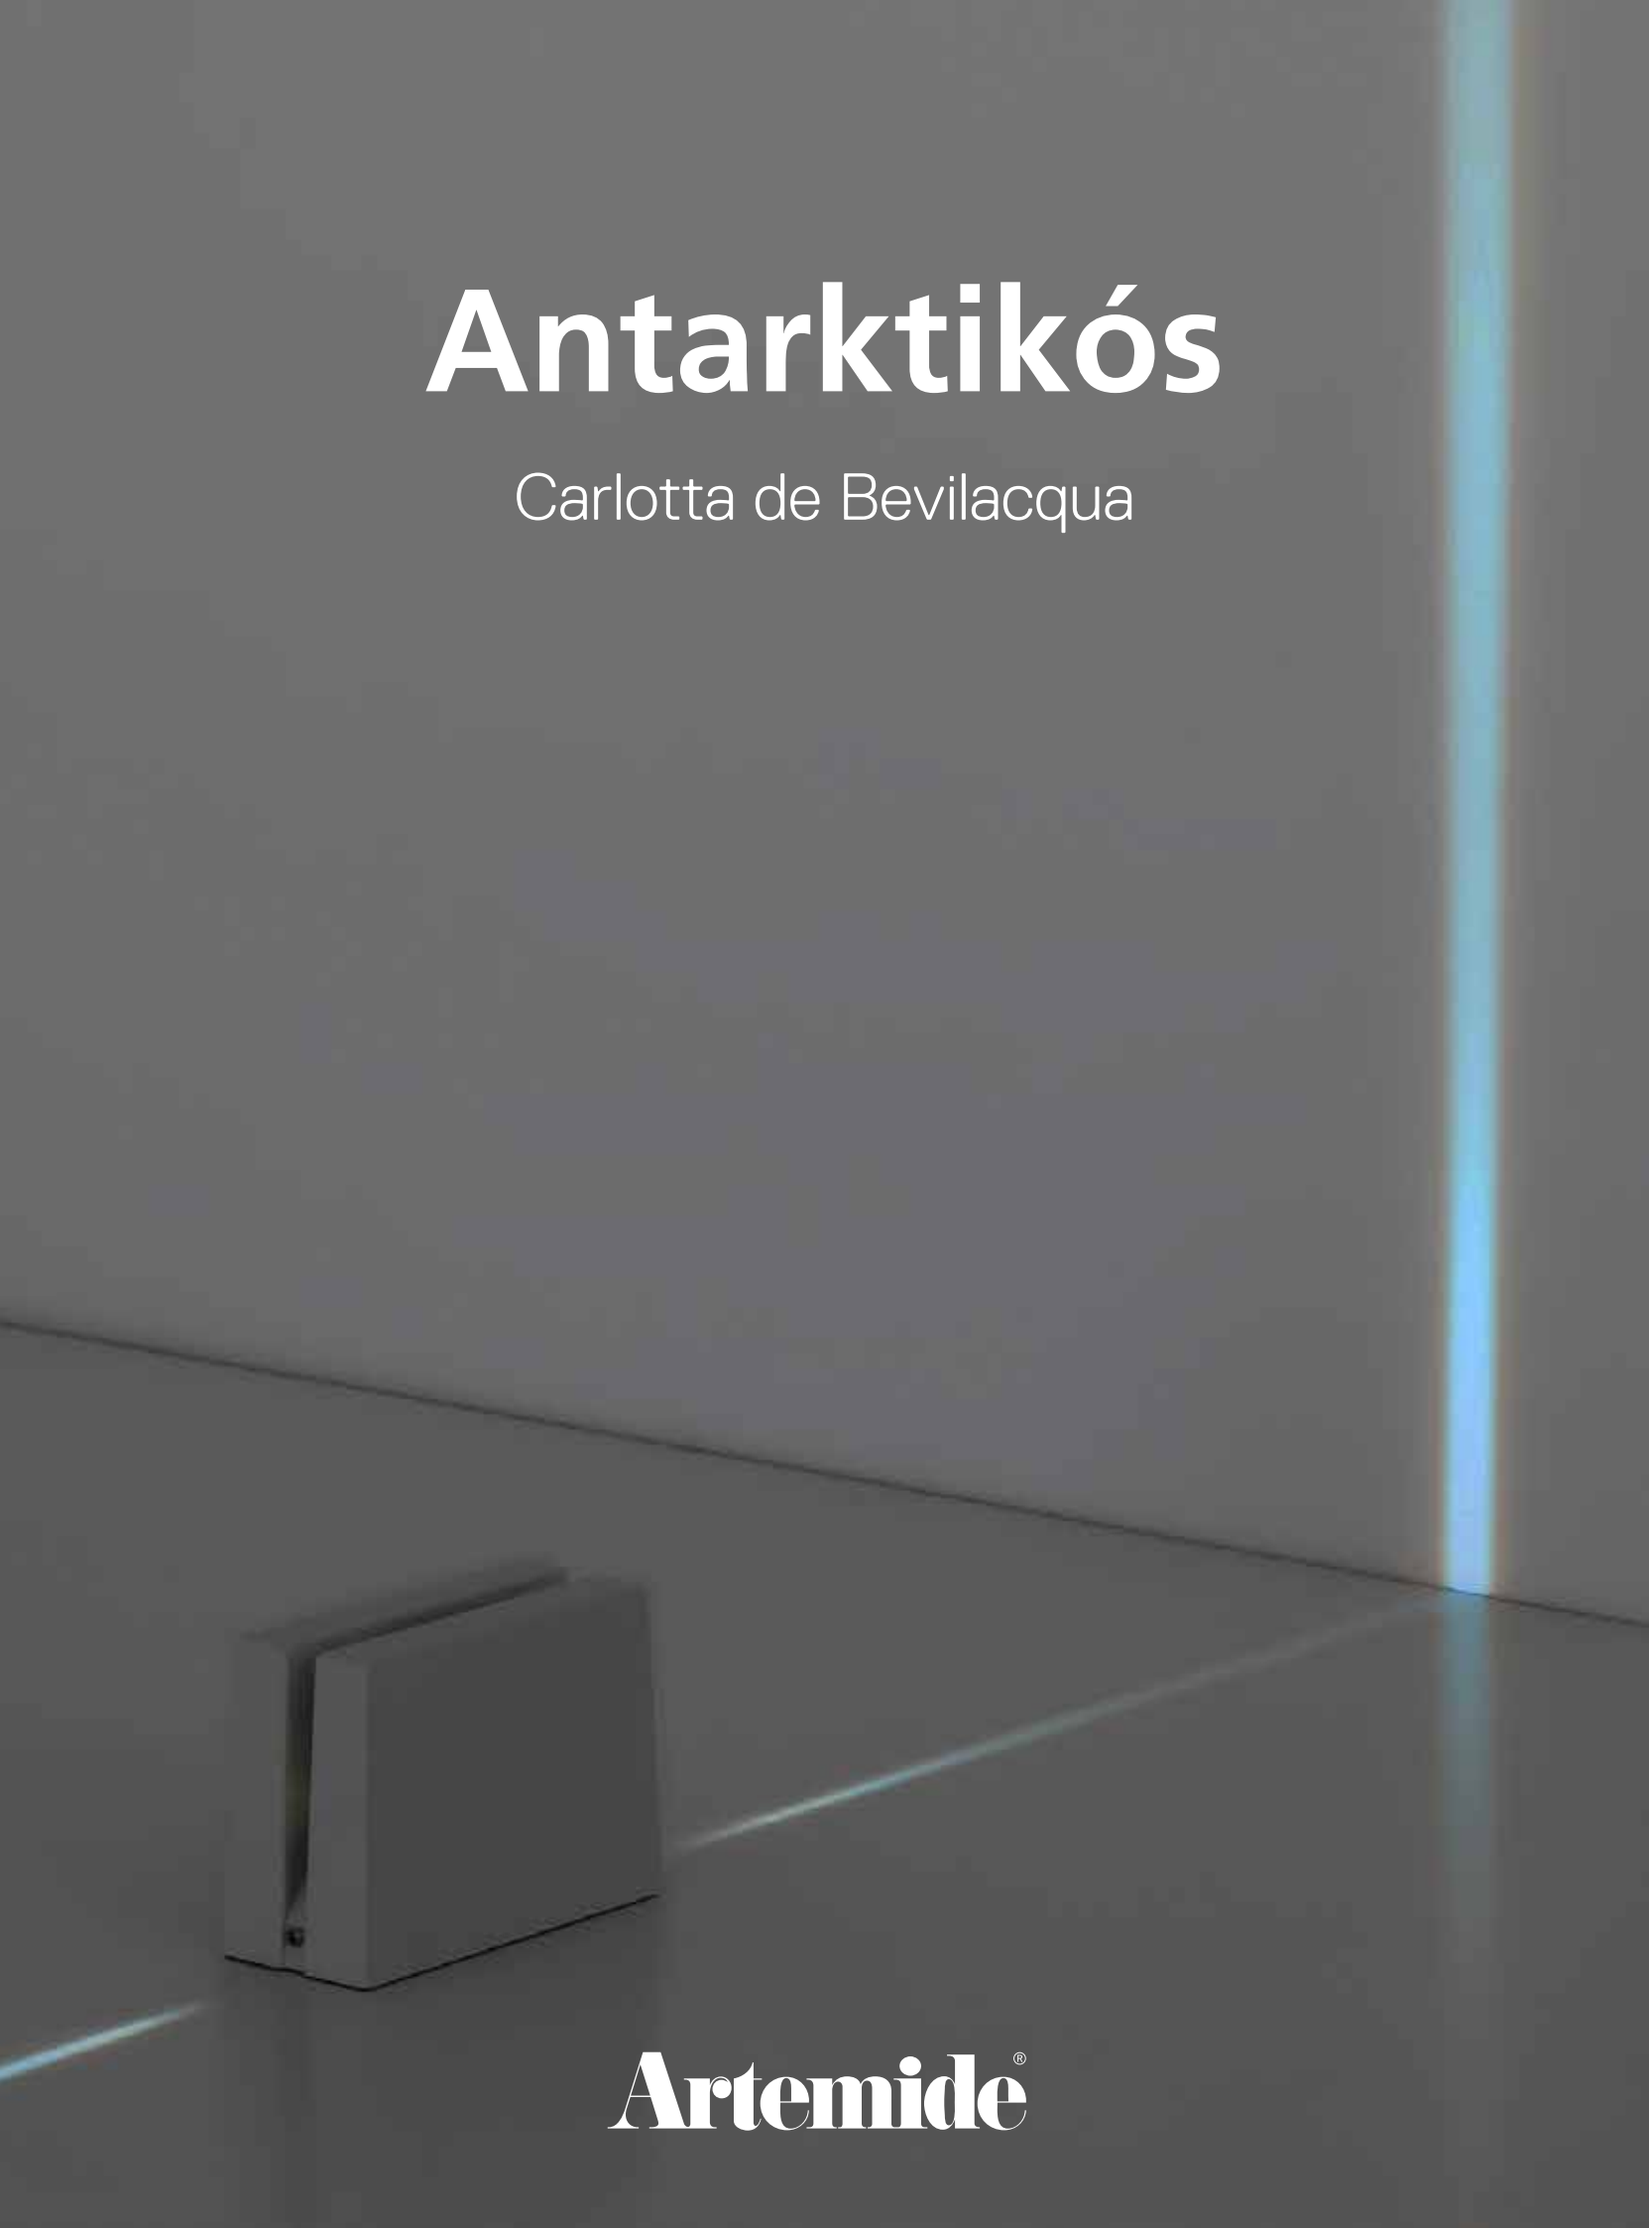

Artemide®

Antarktikós

Carlotta de Bevilacqua
2017

An innovative patented optic realizes a light blade that, from a single LED source, draws a 360° light profile.
A perfect tool for architectural lighting that emphasizes with high efficiency the different opening profiles.

For further information on Antarktikós
visit artemide.com

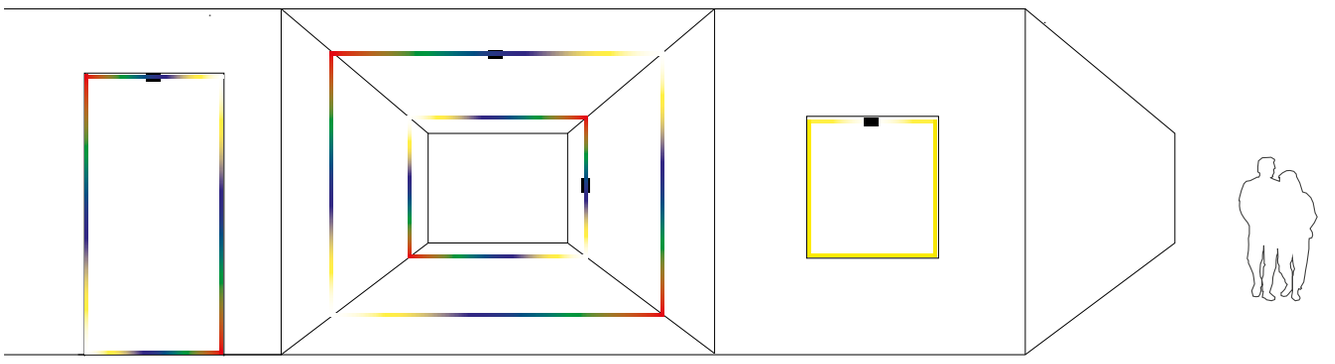

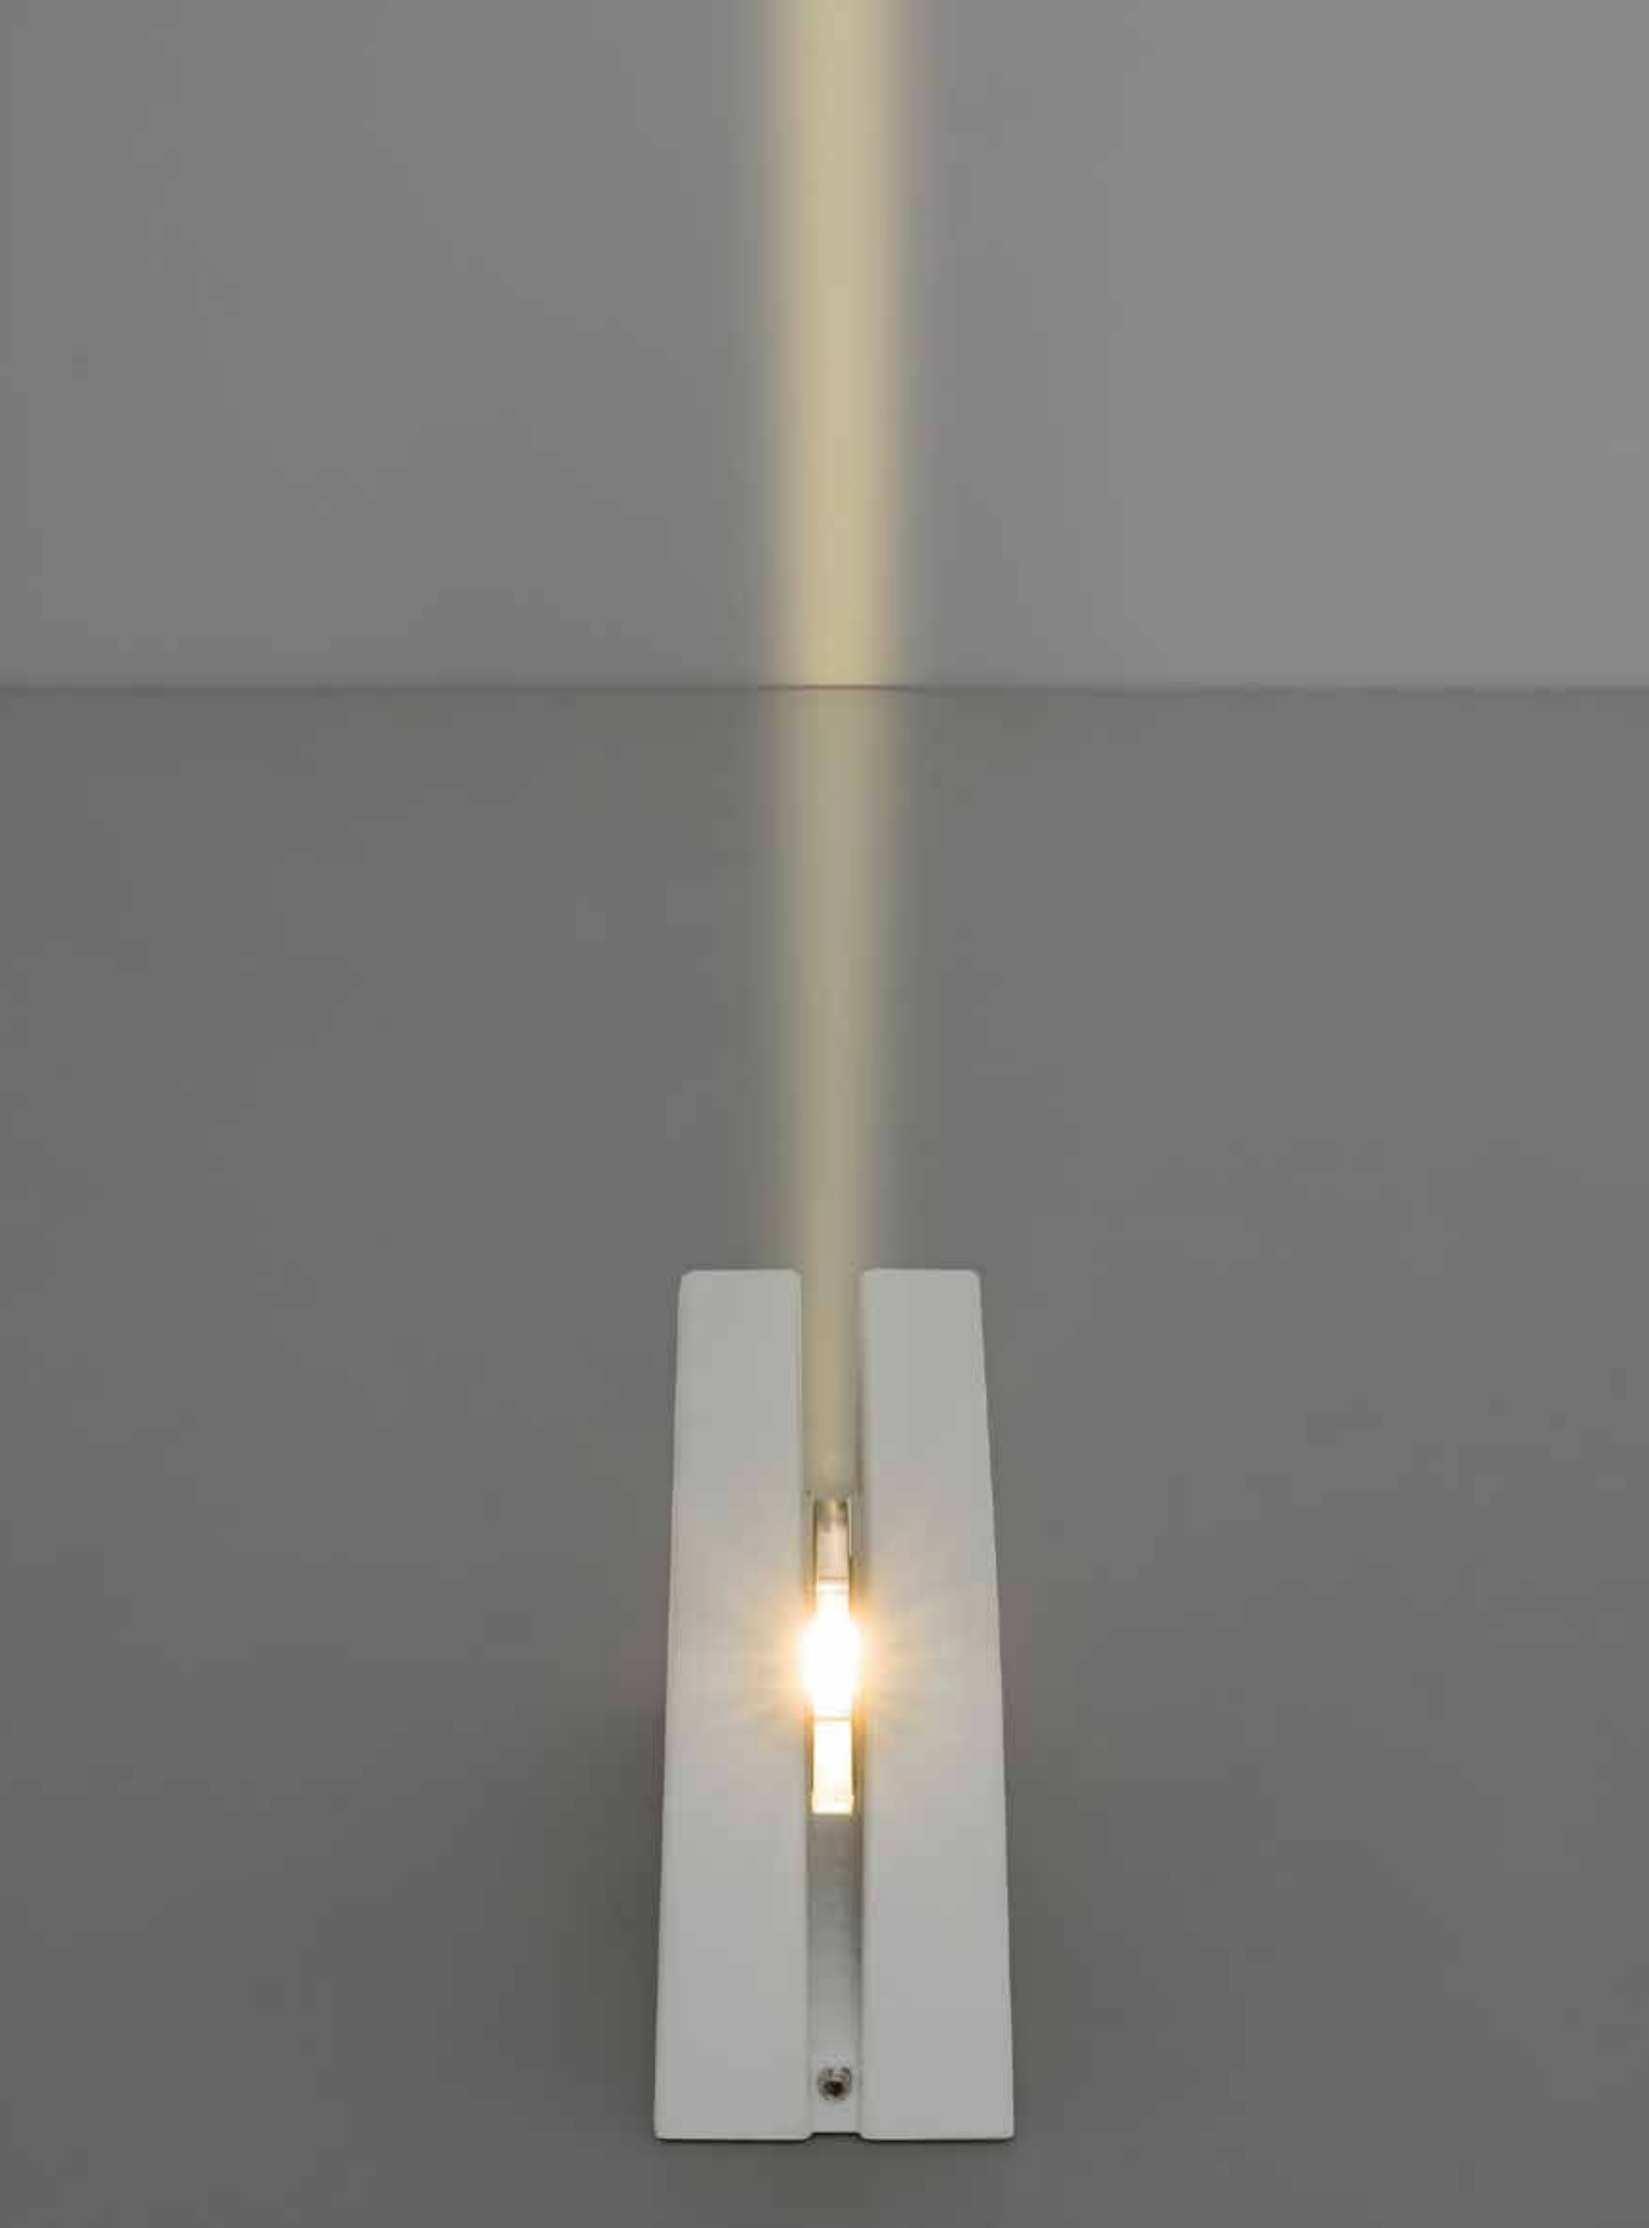

Antarktikós patented optic system

PATENT OF INVENTION

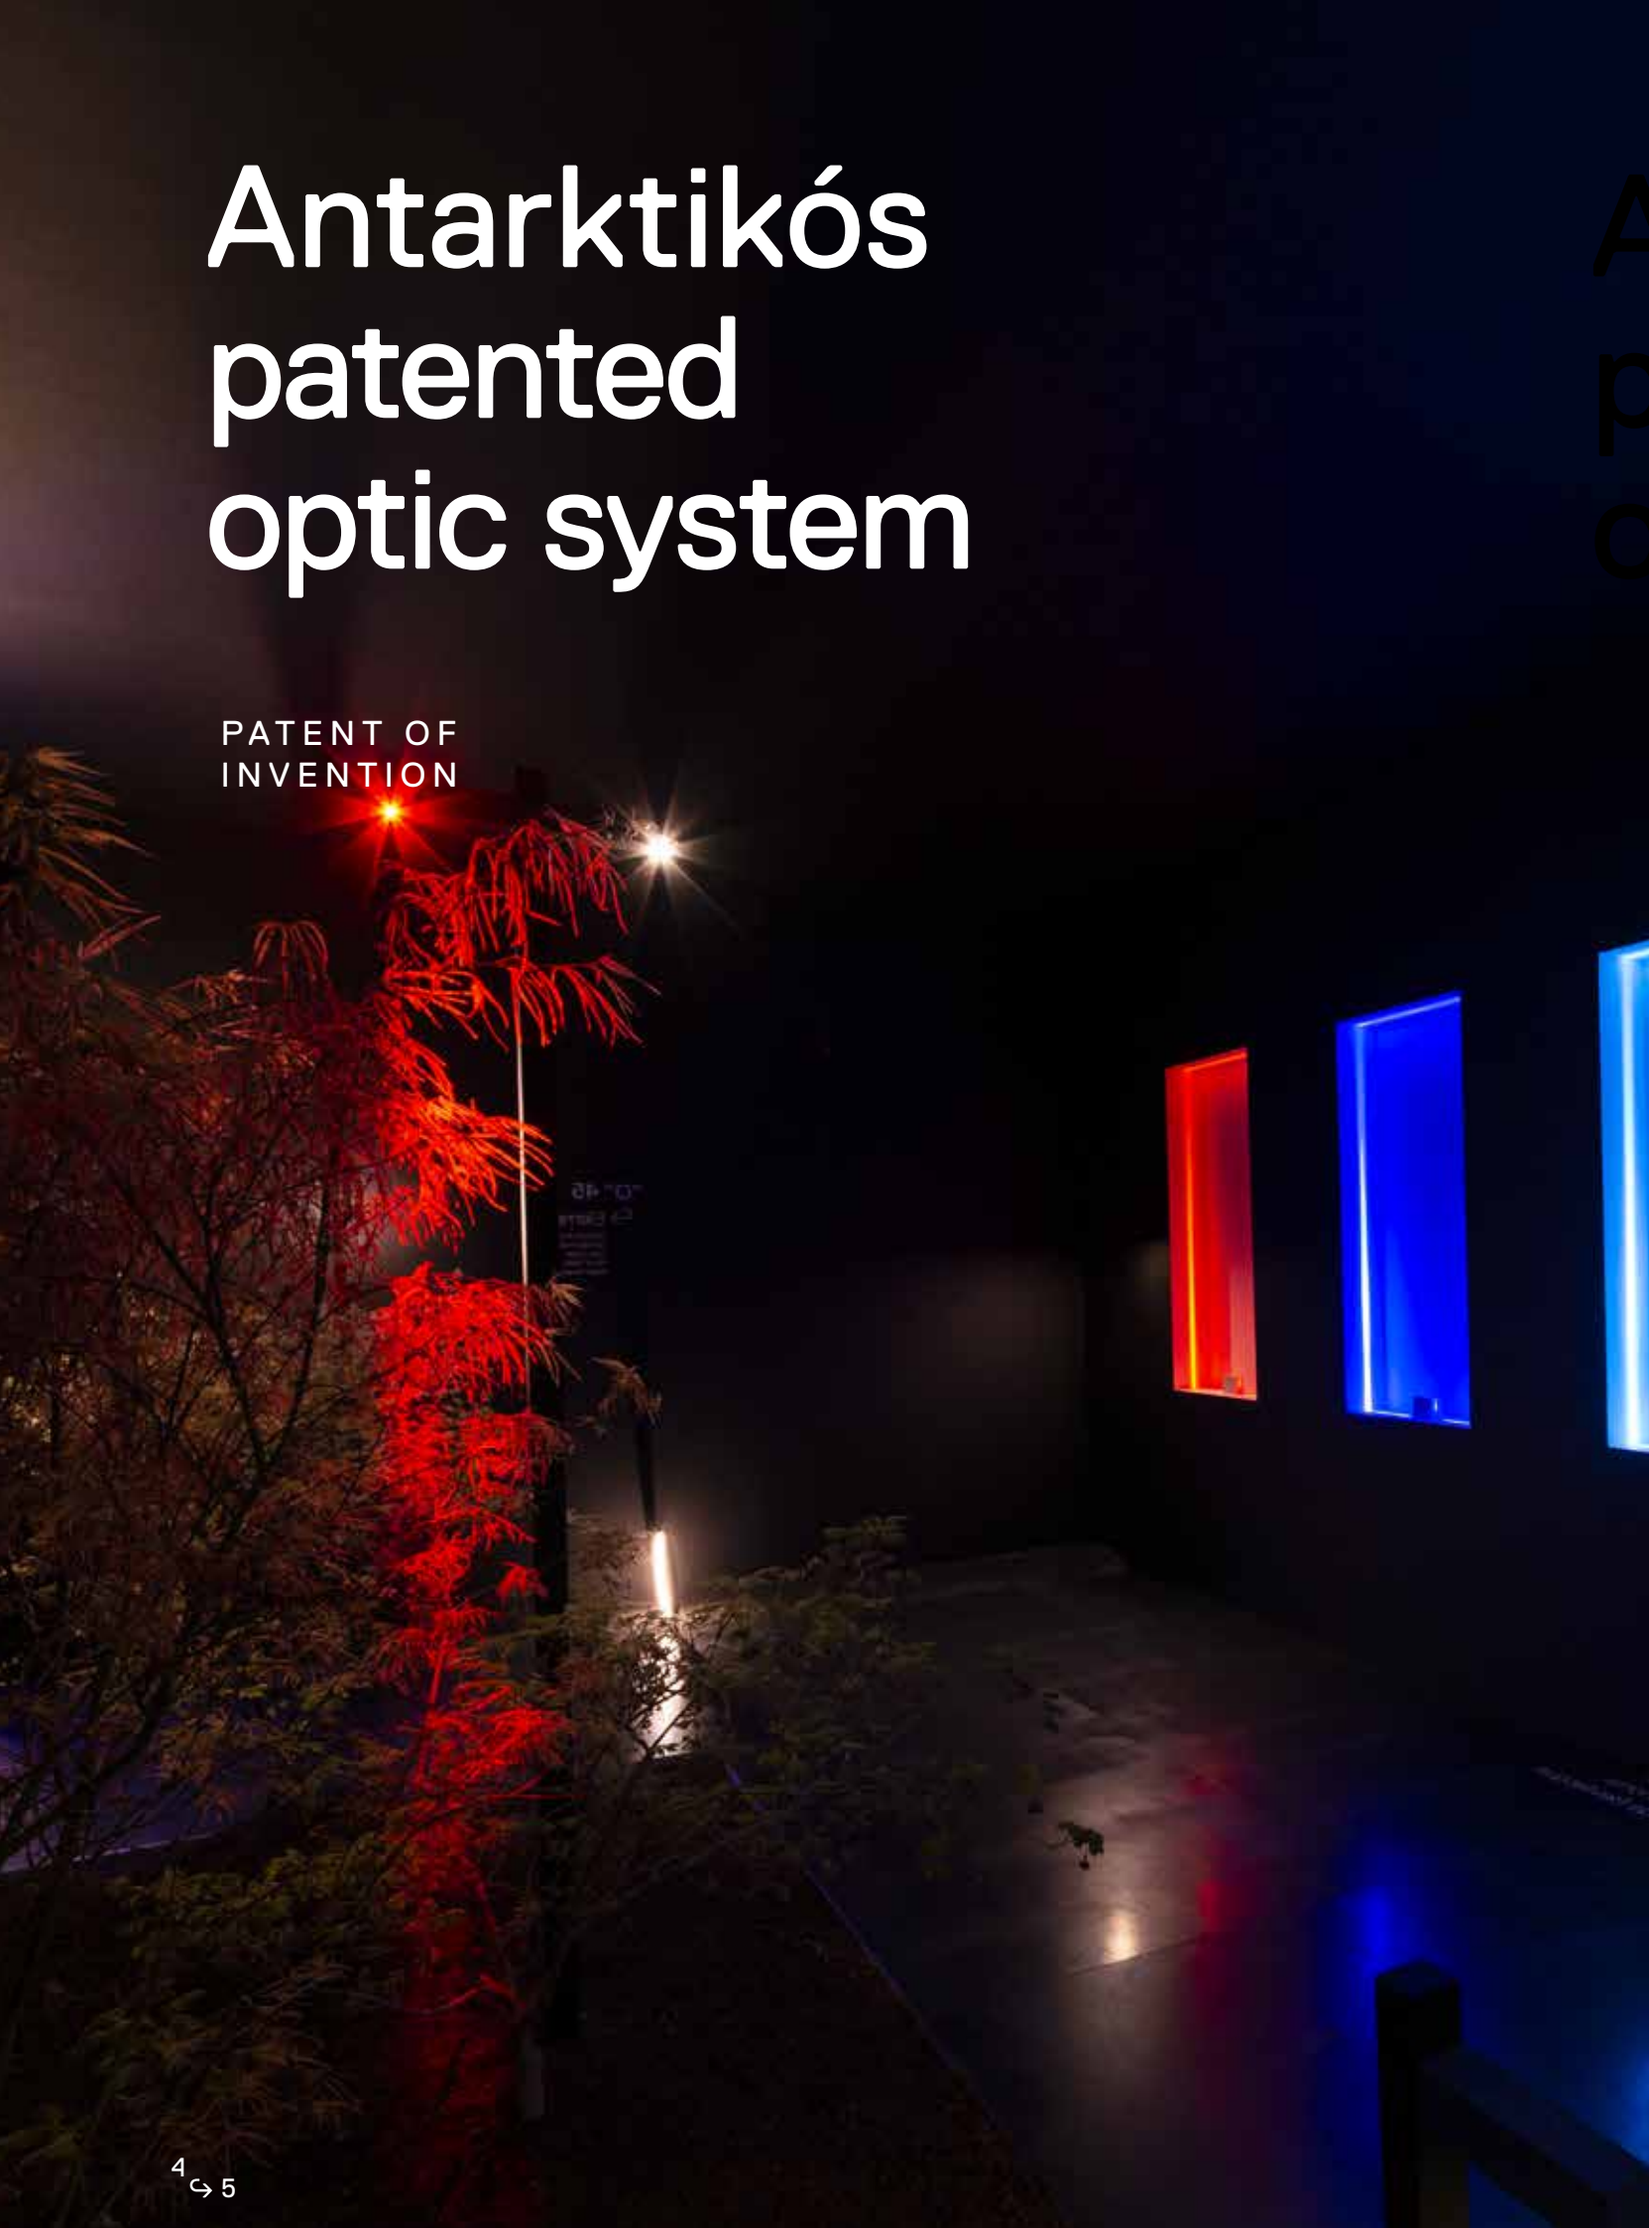


Antarktikós
patented
optic system

Antarktikós RGB

RGB

Antarktikós White

3000 K

Extreme Light control

Extremely limited and protected light emission that reduces to an absolute minimum the light pollution and glare.

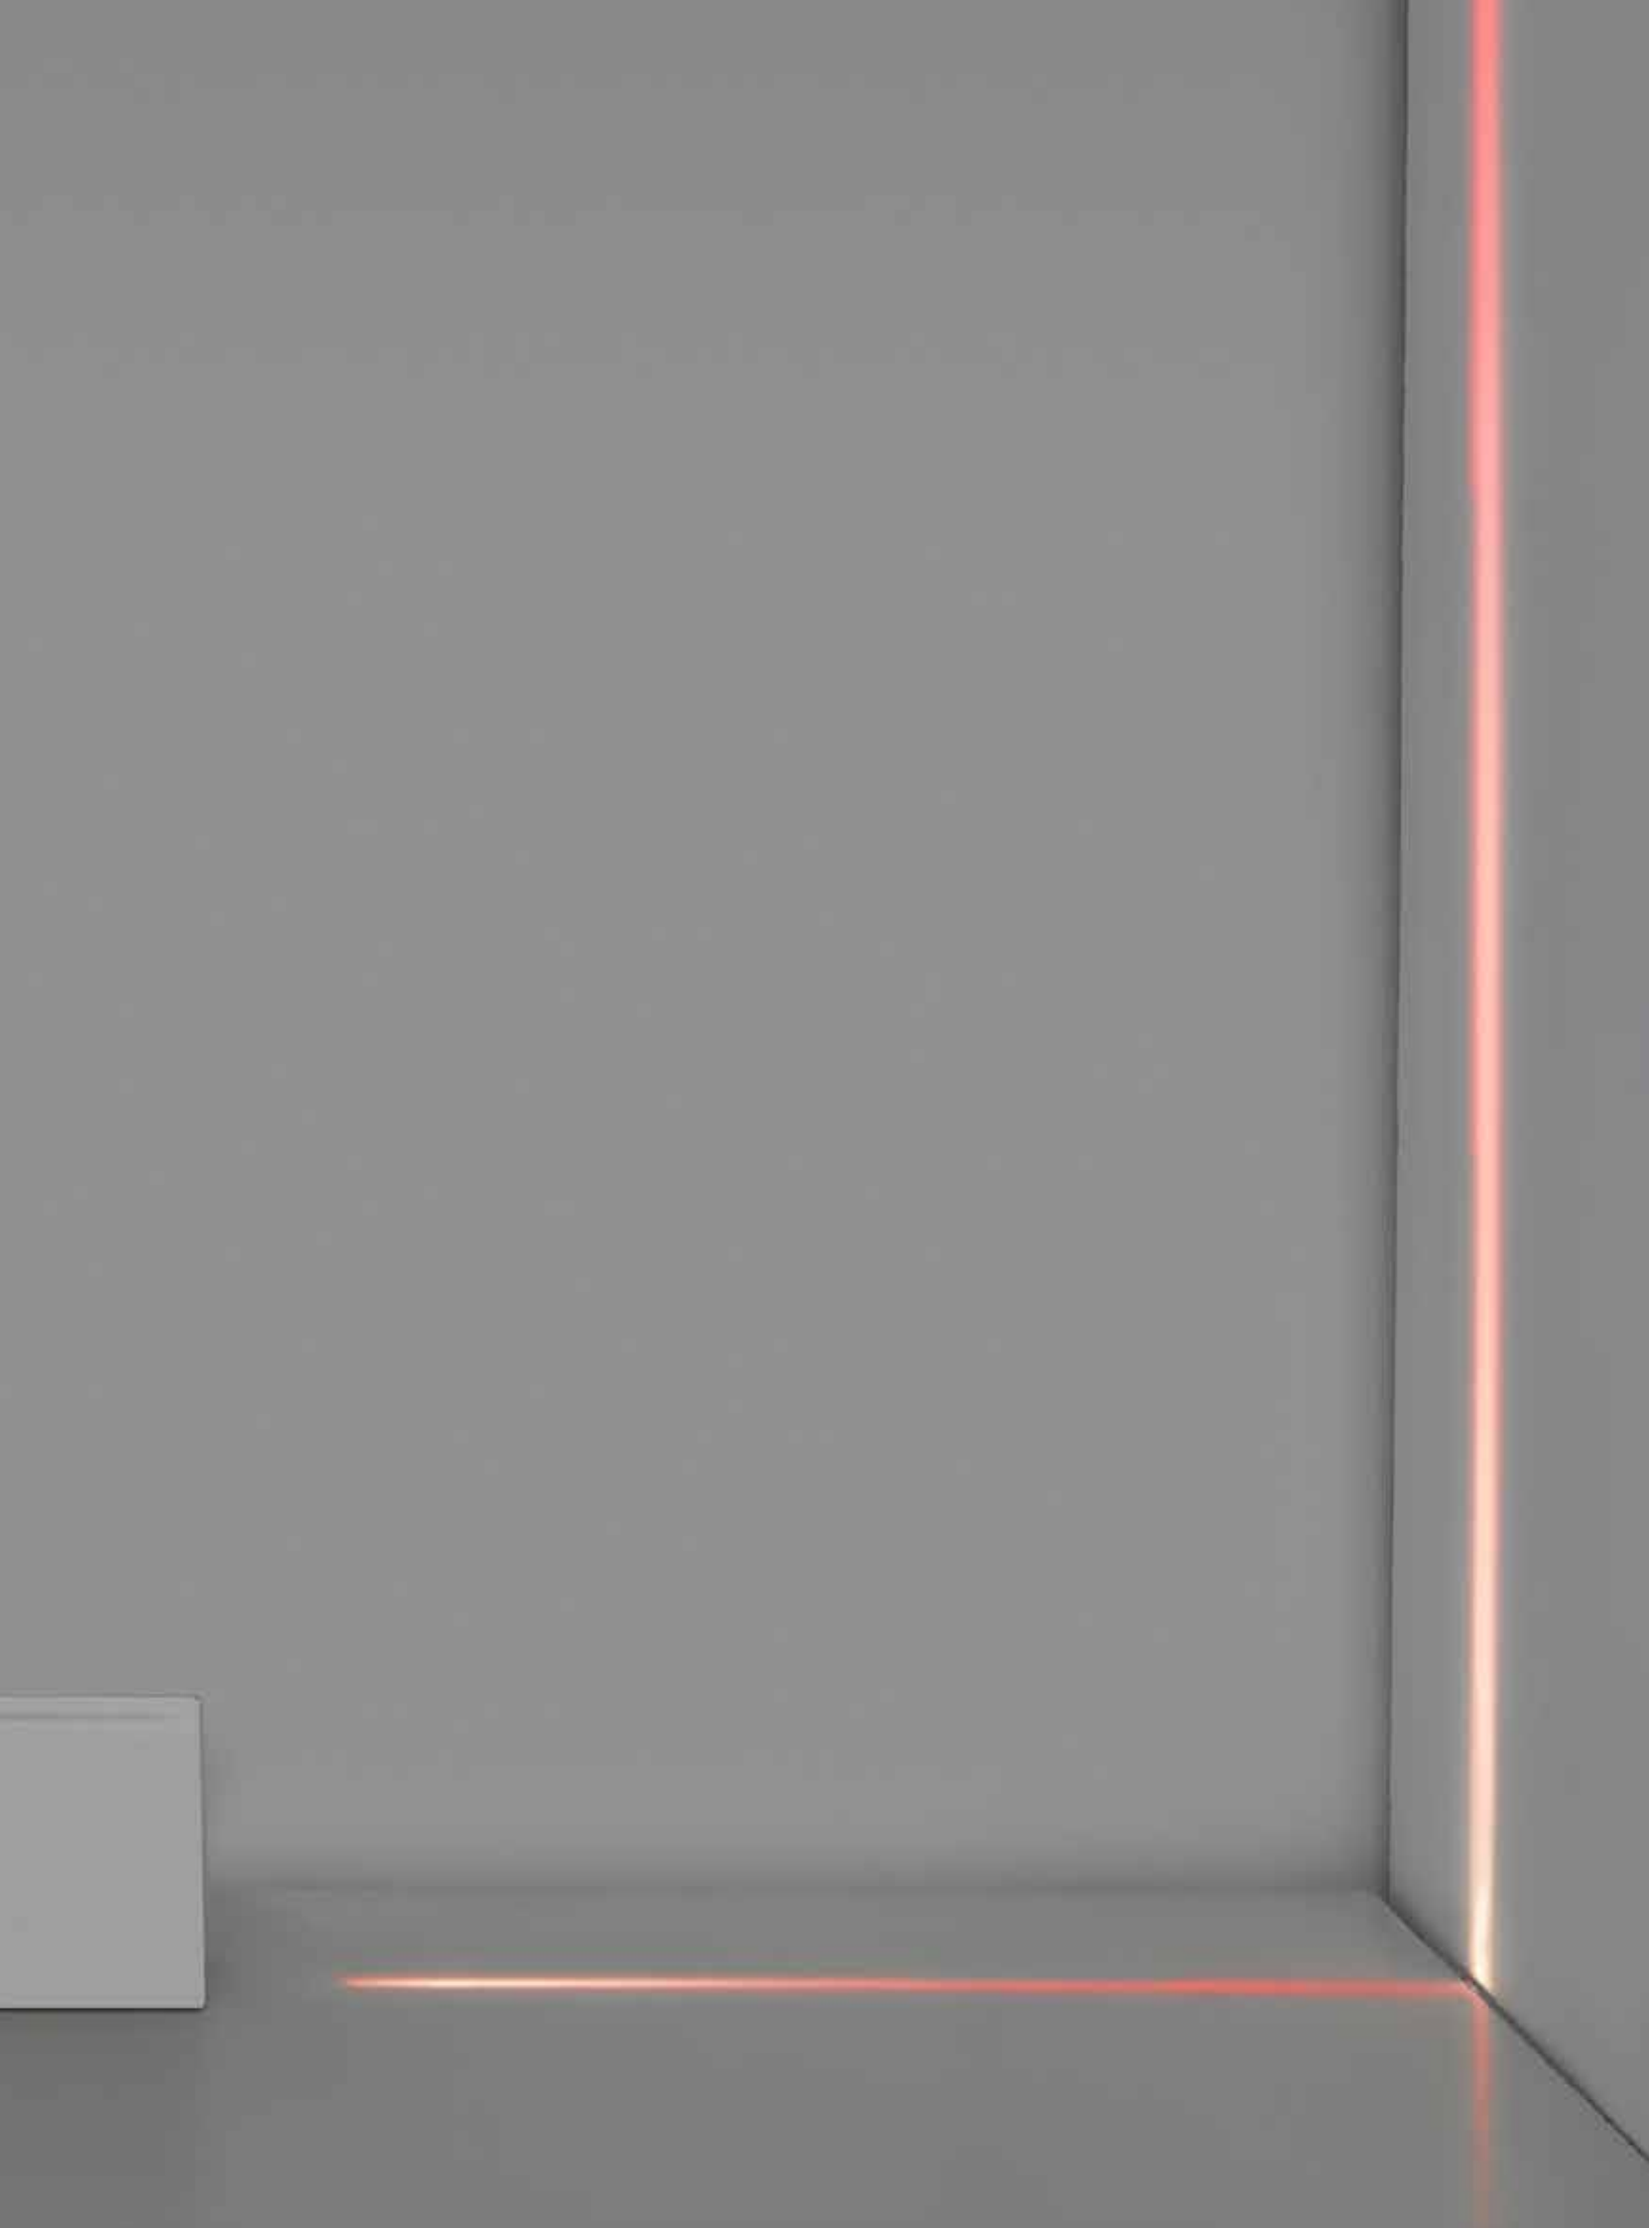

ANTARKTIKÓS

Grey-white
Ral 9002

AS

Driver 500/700mA
supplied separately.

MacAdam 3SDCM
Life L70 (10K)>35500h
CRI =80

IP65
IK06

ANTARKTIKÓS WHITE

W	Flux	CCT	Code
7,5 W	60 lm	3000K	**T4522030**



Driver		Vac	Lmm	Wmm	Hmm	IP	n°device in series		Code
cc 30W	700mA	220-240	146,5	43	22	20	1-4max	Undimmable	**DV1103**
cc 30W	700mA	110-240	115	53,5	26	68	1-4max	Undimmable	**DV1073***
cc 30W	700mA	220-240	115	53,5	26	68	1-4max	DALI2	**DV1077***
cc 25W	900mA	110-240	111	52	22	20	1-2max	DALI/PUSH/0-10	**DV1126**

Driver 700/900 mA SELV supplied separately.
Vf=9V reported values are subject to a tolerance +/-10%.
* IP connectors included.

ANTARKTIKÓS RGB

W	Flux	Code
3 W	20 lm	**T4521030**



Driver	Vin	Vac	Lmm	Wmm	Hmm	IP	n°device in series	Code
25 W	100-277 Vac	12Vdc	148	40	32	67	max 5	**DV1055***
40 W	100-277 Vac	12Vdc	163	43	32	67	max 8	**DV1056***
96 W	100-277 Vac	12Vdc	140	63	32	67	max 20	**DV1057***
150 W	100-277 Vac	12Vdc	228	68	39	67	max 30	**DV1043***
DIMMER DMX	12-24 Vdc	12-24 pwm	88	54	25	20	max 1	**DV1059**
DIMMER DALI	12-24 Vdc	12-24 pwm	88	54	25	20	max 1	**DV1052**

* IP connectors included.

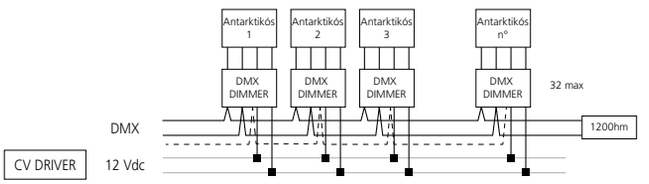

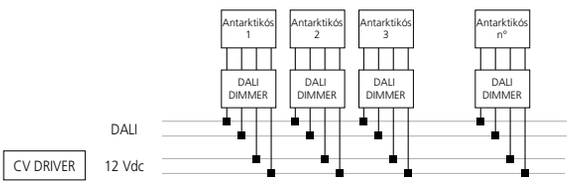

Notes:
It is necessary to use 1 Dimmer for each Antarktikos RGB as indicated in the scheme.
Use DMX suitable twisted pair cables with an impedance of 120Ω and a low capacitance.
Max. of 32 standard devices connected over a max. cable length of 300m wired in a multi-drop bus topology commonly called “daisy chain”.
Terminate the last driver with an impedance of 120Ω (120Ω resistor joining pins + and -).
After 32 unit loads a repeater/booster should be used.
Use DMX Splitters for larger installations or to simplify wiring. The output of a DMX splitter is considered a new DMX line, with the same rules applying.

Antarktikós is compatible with Artemide App

Artemide App is a user-friendly and intuitive interface used to control individual products, groups of appliances and lighting scenarios. It is a tool that can be associated with several products from both the Design and the Architectural Catalogues.

Download Artemide App
and find more information on
artemide.com

Artemide

Headquarters

Artemide S.p.A.
Via Bergamo, 18
20010 Pregnana Milanese (MI), Italy
Tel. +39 02 93518.1
Tel. +39 02 93526.1
Numero verde 800 834 093
(from Italy only)
info@artemide.com
artemide.com

Communication and Marketing Department

Via Canova, 34
20145 Milan (MI), Italy
Tel. +39 02.349611
marketing@artemide.com
artemide.com

ISO 9001:2015

ISO 14001:2015

ISO 45001:2018

For information regarding distributors and points of sale, please visit our website artemide.com or email: info@artemide.com