

Luminaire


Code 1205000APP
Name ALPHABET OF LIGHT S LINEARE 180 - APP COMPATIBILE

Measurem.

Code FTS1901508
Name ALPHABET OF LIGHT S LINEARE 180 - APP COMPATIBILE

Luminaire Flux	5226.12 lm	Luminaire Power	50.00 W	Efficacy	104.52 lm/W	Efficiency	100.00%
Sources Flux	5226.12 lm	Maximum value	158.36 cd/klm	Position	C=45.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1800 mm	Width	50 mm	Height	50 mm
Rectangular Luminous Area		Length	1800 mm	Width	50 mm	Height	50 mm
Horizontal Luminous Area		0.090000 m2		Emitting area on Plane 180°		0.090000 m2	
Emitting area on Plane 0°		0.090000 m2		Emitting area on Plane 270°		0.002500 m2	
Emitting area on Plane 90°		0.002500 m2		Glare area at 76°		0.109100 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		18-09-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5226.12 lm	
LED Flux=6451,2lm LED Power=45W Eff=81% EfcLed=143lm/W EfcLum=105lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	33 60 83 69 100			D DIN 5040	B21		
F UTE	0.69 H + 0.31 T			B NBN	BZ 6		

1800mm x 50mm




Semipiani C

180.0 — 0.0
270.0 — 90.0

ULOR 30.60 %

DLOR 69.40 %

RN 30.60 %

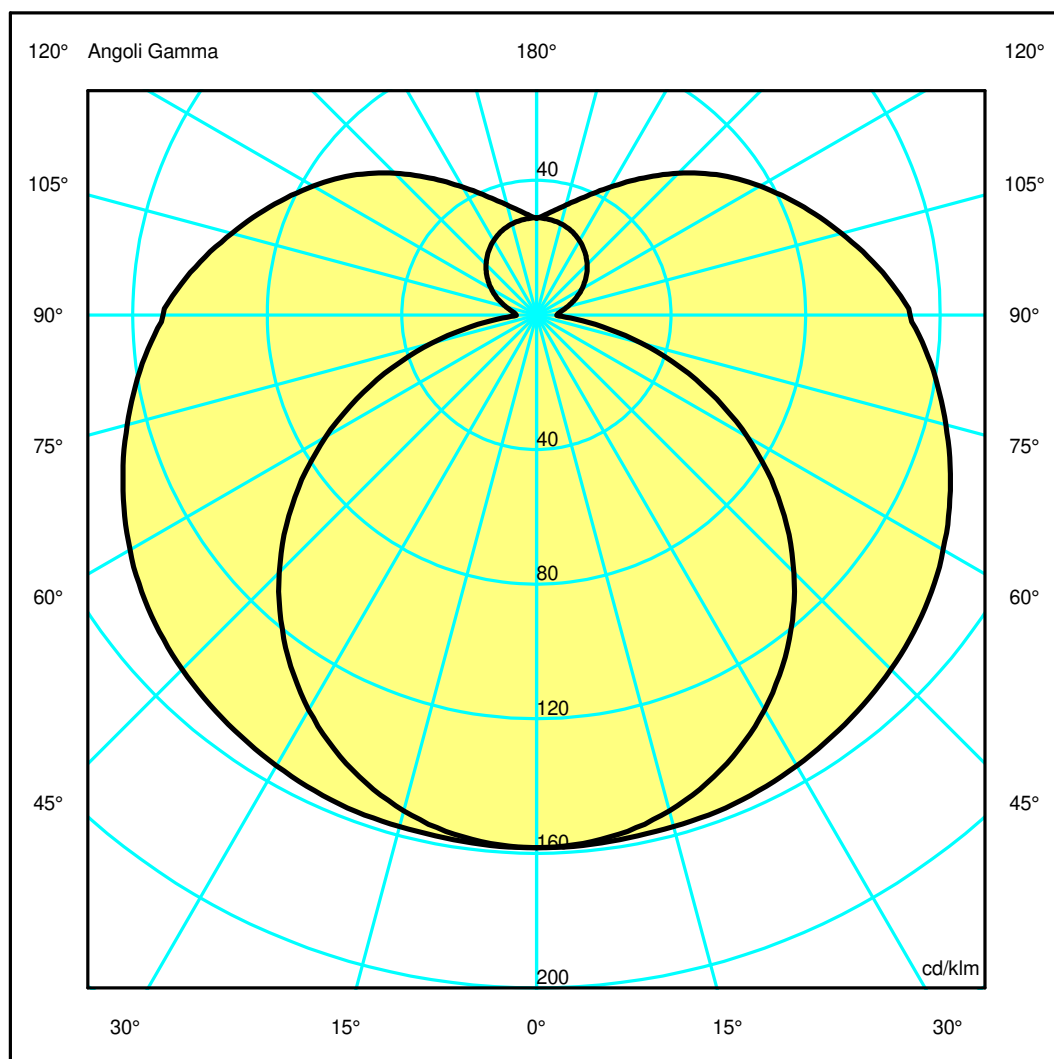

Luminaire

Code 1205000APP
Name ALPHABET OF LIGHT S LINEARE 180 - APP COMPATIBILE

Measurem.

Code FTS1901508
Name ALPHABET OF LIGHT S LINEARE 180 - APP COMPATIBILE

Luminaire Flux	5226.12 lm	Luminaire Power	50.00 W	Efficacy	104.52 lm/W	Efficiency	100.00%
Sources Flux	5226.12 lm	Maximum value	158.36 cd/klm	Position	C=45.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1800 mm	Width	50 mm	Height	50 mm
Rectangular Luminous Area		Length	1800 mm	Width	50 mm	Height	50 mm
Horizontal Luminous Area		0.090000 m2		Emitting area on Plane 180°		0.090000 m2	
Emitting area on Plane 0°		0.090000 m2		Emitting area on Plane 270°		0.002500 m2	
Emitting area on Plane 90°		0.002500 m2		Glare area at 76°		0.109100 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		18-09-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5226.12 lm	
LED Flux=6451,2lm LED Power=45W Eff=81% EfcLed=143lm/W EfcLum=105lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	33 60 83 69 100			D DIN 5040	B21		
F UTE	0.69 H + 0.31 T			B NBN	BZ 6		

Apertura a destra non trovata, gamma =0

Apertura a destra non trovata, gamma =0

Apertura a destra non trovata, gamma =0