


## Luminaire

Code AT05004+AT10100  
 Name A.39 MODULO RCS TRIM DIFF L=1184mm 830 DIM NRO

## Measurement

Code FTS1801015  
 Name A.39 MODULO RCS TRIM DIFF L=1184mm 830 DIM NRO

Luminaire Flux	2008.94 lm	Luminaire Power	33.00 W	Efficacy	60.88 lm/W	Efficiency	100.00%
Sources Flux	2008.94 lm	Maximum value	394.91 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire	Length	1184 mm	Width	55 mm	Height	60 mm	
Rectangular Luminous Area	Length	1176 mm	Width	40 mm	Height	0 mm	
Horizontal Luminous Area	0.047040 m <sup>2</sup>	Emitting area on Plane 180°	0.000000 m <sup>2</sup>	Emitting area on Plane 270°	0.000000 m <sup>2</sup>	Emitting area on Plane 90°	0.011380 m <sup>2</sup>
Coordinate system	CG	Symmetry Type	Double Symmetrical	Date	22-05-2018	Maximum Gamma Angle	180
Measurement Distance	0.00	Measurement Flux	2008.94 lm				
LED Flux=4631,04lm LED Power=29W Eff=43% EfcLed=160lm/W EfcLum=61lm/W CCT=3000K Ra=80 SDCM=2 L70(6K)=50000h							
C.I.E.	50 81 96 100 100	D DIN 5040	A30				
F UTE	1.00 E	B NBN	BZ 4				

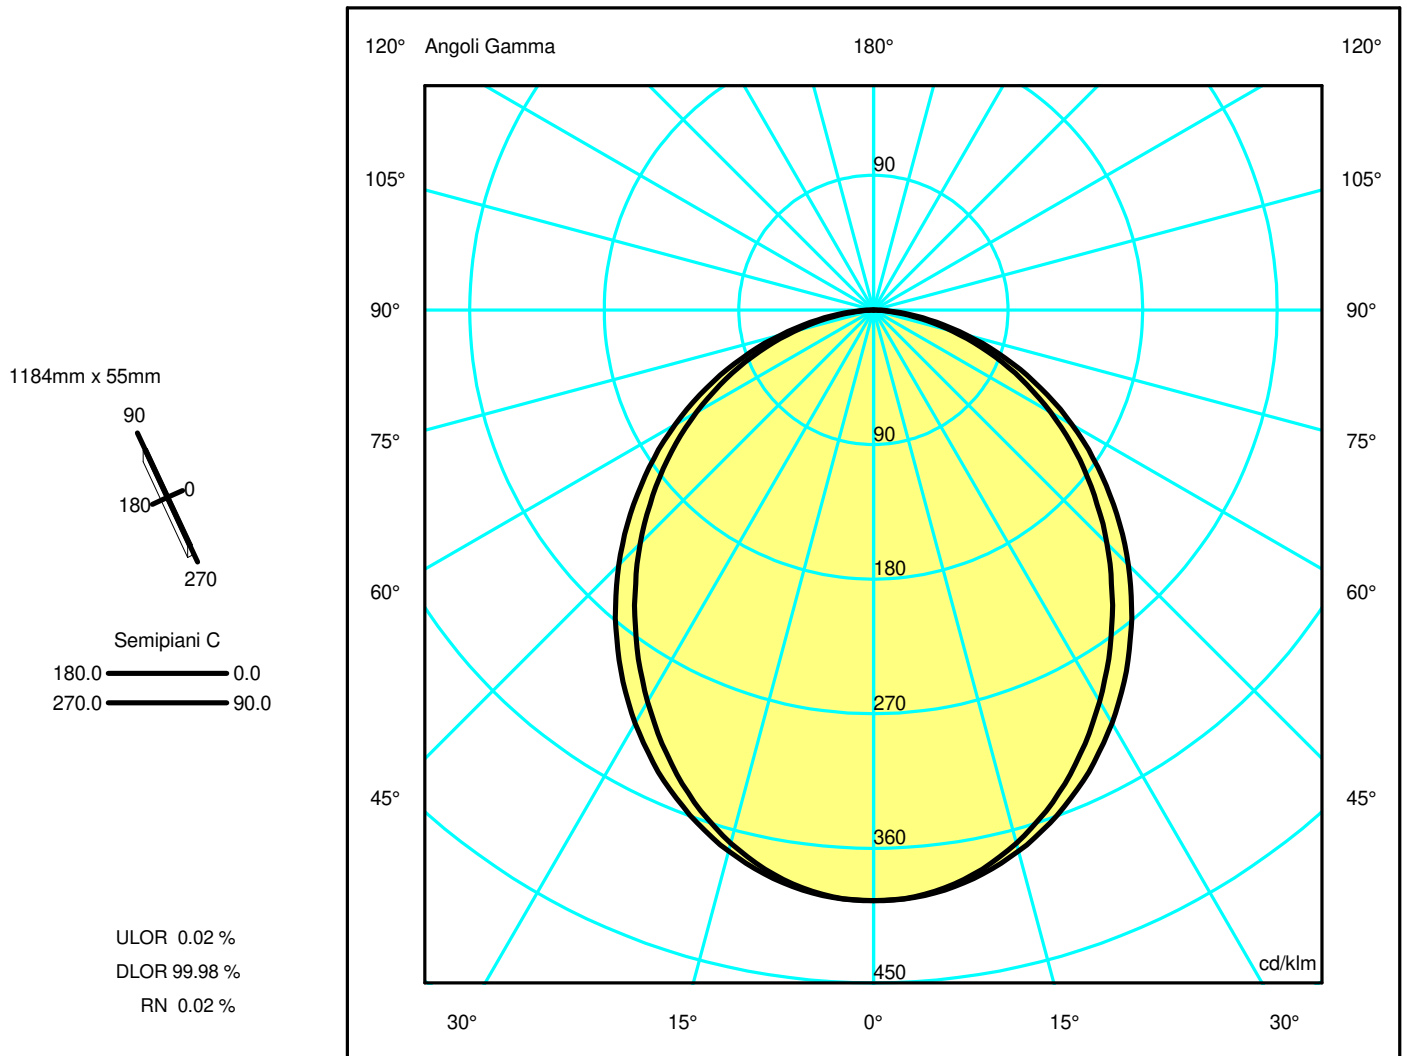

## Luminaire

Code AT05004+AT10100  
Name A.39 MODULO RCS TRIM DIFF L=1184mm 830 DIM NRO

## Measurment.

Code FTS1801015  
Name A.39 MODULO RCS TRIM DIFF L=1184mm 830 DIM NRO

Luminaire Flux	2008.94 lm	Luminaire Power	33.00 W	Efficacy	60.88 lm/W	Efficiency	100.00%
Sources Flux	2008.94 lm	Maximum value	394.91 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1184 mm	Width	55 mm	Height	60 mm
Rectangular Luminous Area		Length	1176 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area		0.047040 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.011380 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		22-05-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2008.94 lm	


LED Flux=4631,04lm LED Power=29W Eff=43% EfcLed=160lm/W EfcLum=61lm/W CCT=3000K Ra=80 SDCM=2 L70(6K)=50000h

C.I.E.	50 81 96 100 100	D DIN 5040	A30
F UTE	1.00 E	B NBN	BZ 4

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.15	2.31	3.46	4.62	5.77	OC	1.30	2.61	3.91	5.22	6.52
OB	1.15	2.31	3.46	4.62	5.77	OD	1.30	2.61	3.91	5.22	6.52

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	793.36	787.87	741.41	657.48	554.24	443.31	331.11	219.36	110.75	23.37
OB	793.36	787.87	741.41	657.48	554.24	443.31	331.11	219.36	110.75	23.37
OC	793.36	789.49	752.42	684.34	591.93	484.19	367.87	247.79	128.88	33.92
OD	793.36	789.49	752.42	684.34	591.93	484.19	367.87	247.79	128.88	33.92

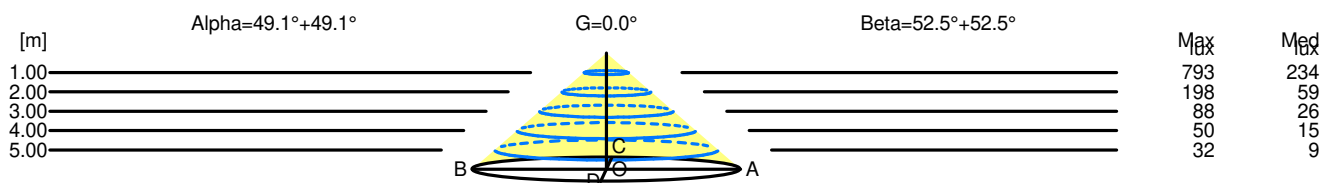

H[m]	D[m]	Max lux	Med lux	Alpha=49.1°+49.1°	G=0.0
1.00	2.31	793	234		
2.00	4.62	198	59		
3.00	6.93	88	26		
4.00	9.23	50	15		
5.00	11.54	32	9		

H[m]	D[m]	Max lux	Med lux	Beta=52.5°+52.5°	G=0.0
1.00	2.61	793	234		
2.00	5.22	198	59		
3.00	7.83	88	26		
4.00	10.44	50	15		
5.00	13.05	32	9		