

Luminaire

Code AT06304+AT10200
 Name A.39 MODULO RCS TRIM DIFF L=2368mm 840 ND NRO

Measurement

Code FTS1801025
 Name A.39 MODULO RCS TRIM DIFF L=2368mm 840 ND NRO

Luminaire Flux	4197.79 lm	Luminaire Power	63.00 W	Efficacy	66.63 lm/W	Efficiency	100.00%
Sources Flux	4197.79 lm	Maximum value	394.91 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2368 mm	Width	55 mm	Height	60 mm
Rectangular Luminous Area		Length	2360 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area		0.094400 m2		Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°	0.022837 m2		
Coordinate system		CG		Symmetry Type	Double Symmetrical		
Date		22-05-2018		Maximum Gamma Angle	180		
Measurement Distance		0.00		Measurement Flux	4197.79 lm		


LED Flux=9676,8lm LED Power=59W Eff=43% EfcLed=164lm/W EfcLum=67lm/W CCT=4000K Ra=80 SDCM=2 L70(6K)=50000h

C.I.E. 50 81 96 100 100
 F UTE 1.00 E

D DIN 5040
 B NBN

A30
 BZ 4


2368mm x 55mm



Semipiani C

180.0 — 0.0
 270.0 — 90.0

ULOR 0.02 %
 DLOR 99.98 %
 RN 0.02 %

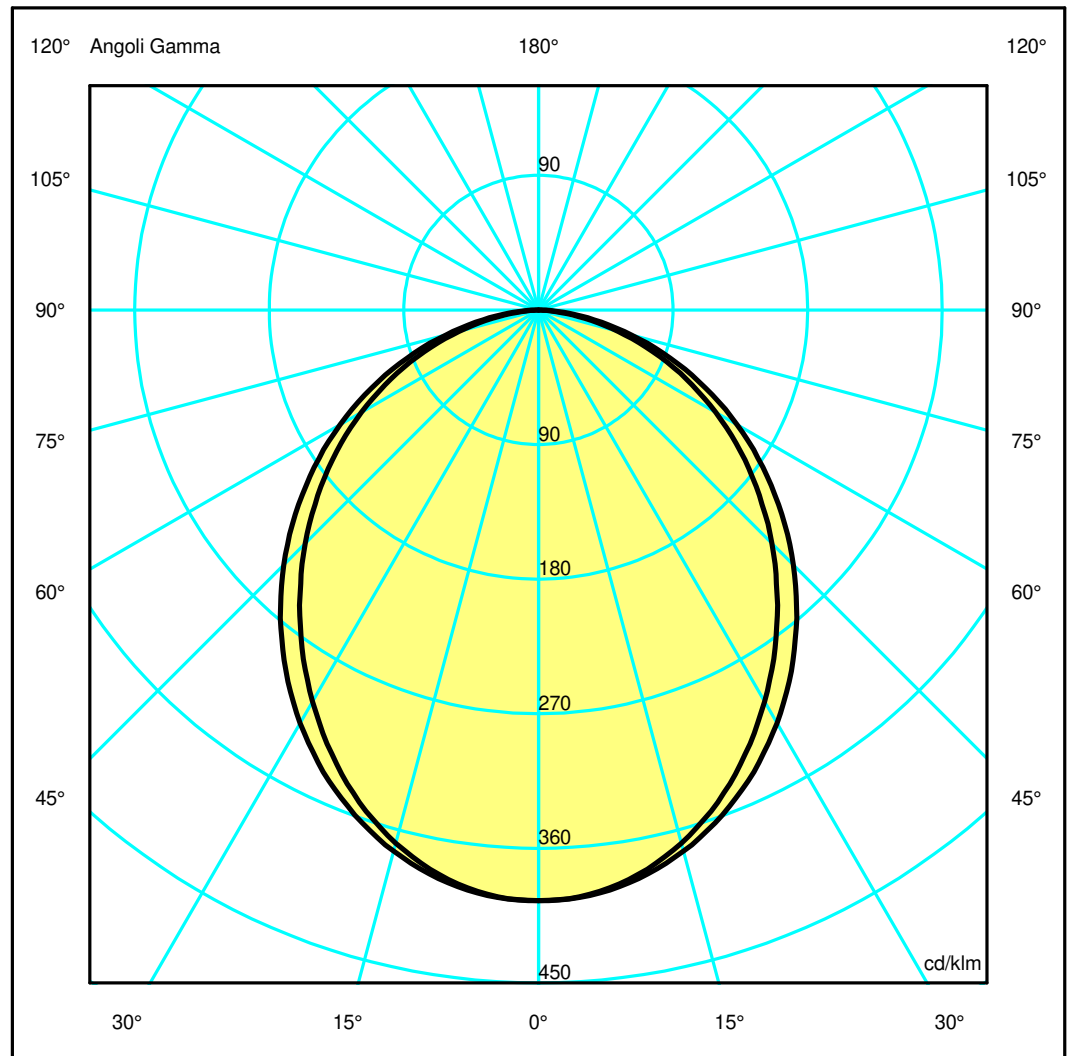

Luminaire

Code AT06304+AT10200
Name A.39 MODULO RCS TRIM DIFF L=2368mm 840 ND NRO

Measurment.

Code FTS1801025
Name A.39 MODULO RCS TRIM DIFF L=2368mm 840 ND NRO

Luminaire Flux	4197.79 lm	Luminaire Power	63.00 W	Efficacy	66.63 lm/W	Efficiency	100.00%
Sources Flux	4197.79 lm	Maximum value	394.91 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2368 mm	Width	55 mm	Height	60 mm
Rectangular Luminous Area		Length	2360 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area		0.094400 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.022837 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		22-05-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4197.79 lm	

LED Flux=9676,8lm LED Power=59W Eff=43% EfcLed=164lm/W EfcLum=67lm/W CCT=4000K Ra=80 SDCM=2 L70(6K)=50000h


C.I.E. 50 81 96 100 100
F UTE 1.00 E

D DIN 5040
B NBN
A30
BZ 4

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.15	2.31	3.46	4.62	5.77	OC	1.30	2.61	3.91	5.22	6.52
OB	1.15	2.31	3.46	4.62	5.77	OD	1.30	2.61	3.91	5.22	6.52

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1657.76	1646.30	1549.22	1373.83	1158.11	926.33	691.87	458.36	231.42	48.84
OB	1657.76	1646.30	1549.22	1373.83	1158.11	926.33	691.87	458.36	231.42	48.84
OC	1657.76	1649.69	1572.23	1429.97	1236.87	1011.75	768.67	517.78	269.29	70.89
OD	1657.76	1649.69	1572.23	1429.97	1236.87	1011.75	768.67	517.78	269.29	70.89

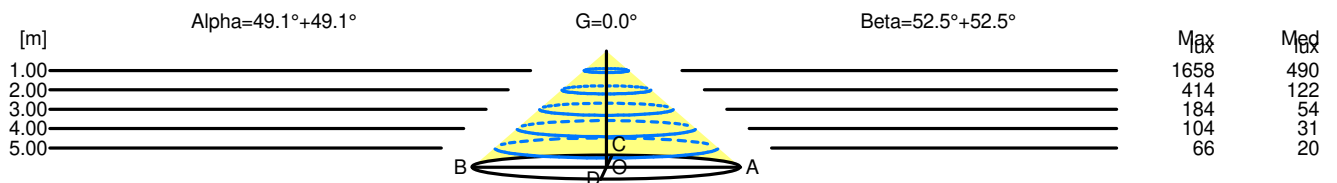

H[m]	D[m]	Max lux	Med lux	Alpha=49.1°+49.1°	G=0.0
1.00	2.31	1658	490		
2.00	4.62	414	122		
3.00	6.93	184	54		
4.00	9.23	104	31		
5.00	11.54	66	20		

H[m]	D[m]	Max lux	Med lux	Beta=52.5°+52.5°	G=0.0
1.00	2.61	1658	490		
2.00	5.22	414	122		
3.00	7.83	184	54		
4.00	10.44	104	31		
5.00	13.05	66	20		