


## Luminaire

Code AT07001+AT10300  
 Name A.39 MODULO RCS TRIM DIFF L=2960mm 830 ND BCO

## Measurem.

Code FTS1801011  
 Name A.39 MODULO RCS TRIM DIFF L=2960mm 830 ND BCO

Luminaire Flux	5429.90 lm	Luminaire Power	81.00 W	Efficacy	67.04 lm/W	Efficiency	100.00%
Sources Flux	5429.90 lm	Maximum value	389.48 cd/klm	Position	C=5.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2960 mm	Width	55 mm	Height	60 mm
Rectangular Luminous Area		Length	2952 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area		0.118080 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.028566 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		22-05-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5429.90 lm	
LED Flux=11577,6lm LED Power=75W Eff=47% EfcLed=154lm/W EfcLum=67lm/W CCT=3000K Ra=80 SDCM=2 L70(6K)=50000h							
C.I.E.	49 80 96 100 100			D DIN 5040	A30		
F UTE	1.00 E			B NBN	BZ 4		

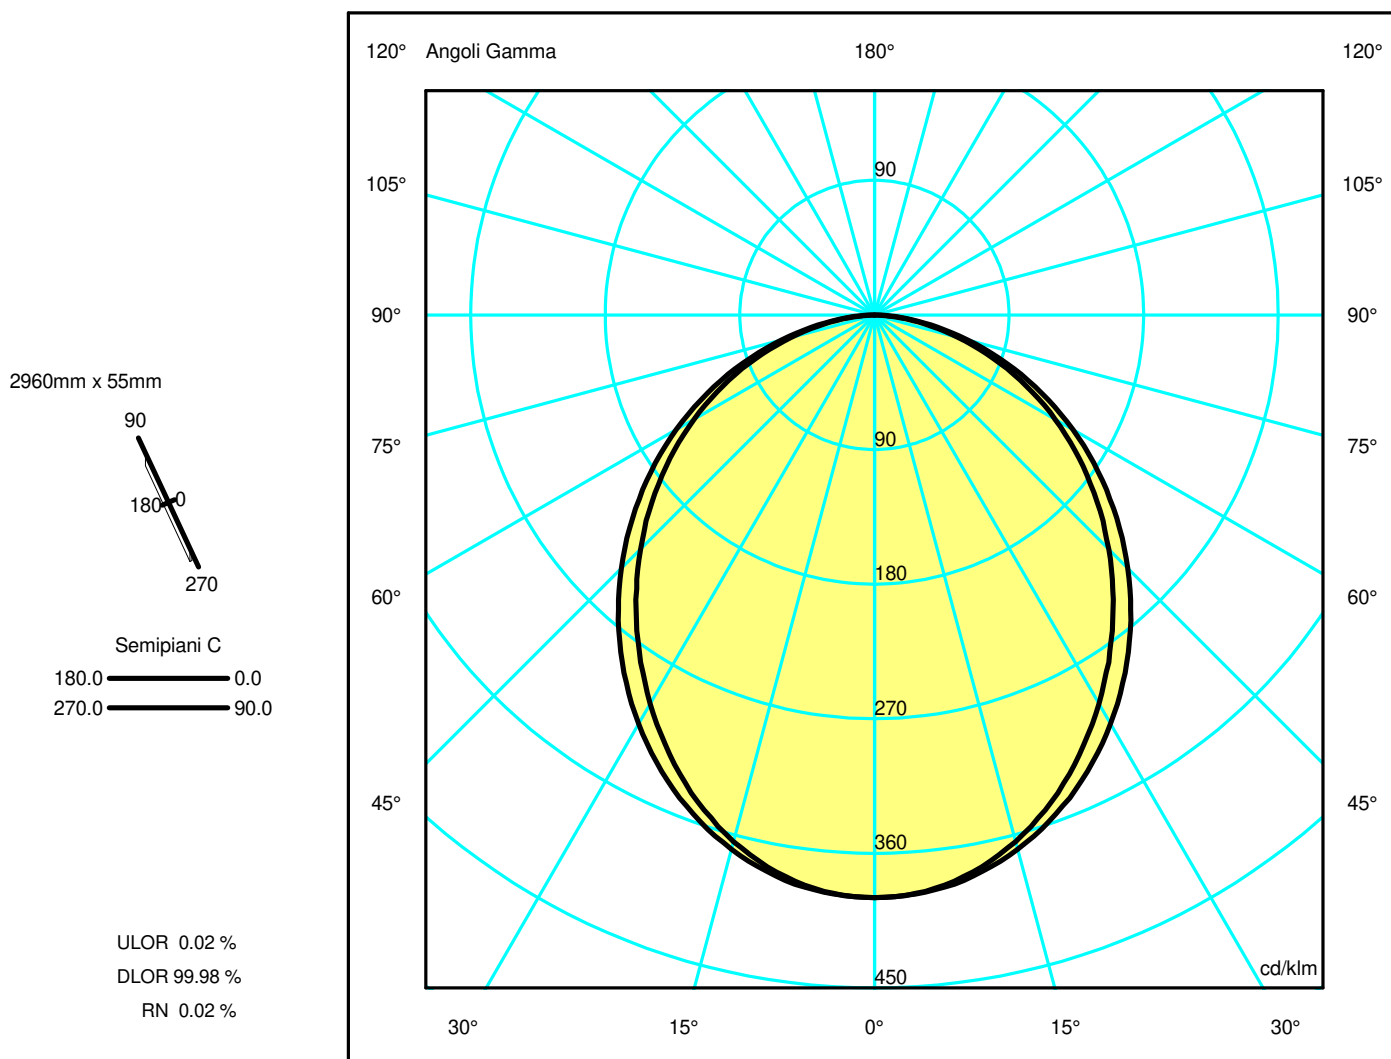

## Luminaire

Code AT07001+AT10300  
Name A.39 MODULO RCS TRIM DIFF L=2960mm 830 ND BCO

## Measurment.

Code FTS1801011  
Name A.39 MODULO RCS TRIM DIFF L=2960mm 830 ND BCO

Luminaire Flux	5429.90 lm	Luminaire Power	81.00 W	Efficacy	67.04 lm/W	Efficiency	100.00%
Sources Flux	5429.90 lm	Maximum value	389.48 cd/klm	Position	C=5.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2960 mm	Width	55 mm	Height	60 mm
Rectangular Luminous Area		Length	2952 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area	0.118080 m2			Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°		0.028566 m2	
Coordinate system	CG			Symmetry Type		Double Symmetrical	
Date	22-05-2018			Maximum Gamma Angle		180	
Measurement Distance	0.00			Measurement Flux		5429.90 lm	


LED Flux=11577,6lm LED Power=75W Eff=47% EfcLed=154lm/W EfcLum=67lm/W CCT=3000K Ra=80 SDCM=2 L70(6K)=50000h

C.I.E.	49 80 96 100 100	D DIN 5040	A30
F UTE	1.00 E	B NBN	BZ 4

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.19	2.38	3.56	4.75	5.94	OC	1.32	2.65	3.97	5.29	6.61
OB	1.19	2.38	3.56	4.75	5.94	OD	1.32	2.65	3.97	5.29	6.61

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2114.68	2100.47	1979.32	1761.12	1489.78	1202.38	906.28	606.16	313.57	78.35
OB	2114.68	2100.47	1979.32	1761.12	1489.78	1202.38	906.28	606.16	313.57	78.35
OC	2114.68	2103.66	2007.76	1828.63	1586.29	1300.74	990.89	669.57	349.74	92.03
OD	2114.68	2103.66	2007.76	1828.63	1586.29	1300.74	990.89	669.57	349.74	92.03

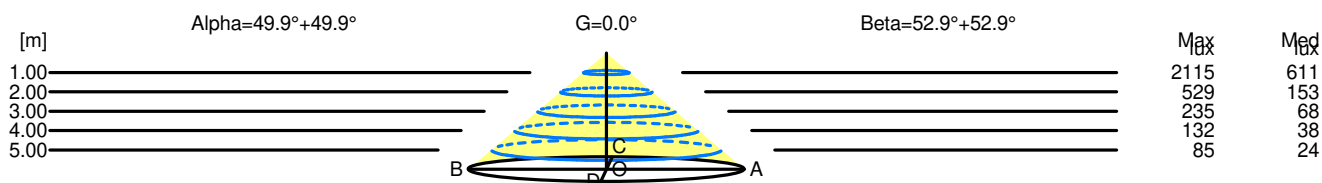

H[m]	D[m]	Max lux	Med lux	Alpha=49.9°+49.9°	G=0.0
1.00	2.38	2115	611		
2.00	4.75	529	153		
3.00	7.13	235	68		
4.00	9.50	132	38		
5.00	11.88	85	24		

H[m]	D[m]	Max lux	Med lux	Beta=52.9°+52.9°	G=0.0
1.00	2.65	2115	611		
2.00	5.29	529	153		
3.00	7.94	235	68		
4.00	10.58	132	38		
5.00	13.23	85	24		