

Luminaire

Code AT06005+AT10200
 Name A.39 MODULO RCS TRIM DIF L=2368 830 DIM SILVER

Measurement

Code FTS1801023
 Name A.39 MODULO RCS TRIM DIF L=2368 830 DIM SILVER

Luminaire Flux	4017.88 lm	Luminaire Power	63.00 W	Efficacy	63.78 lm/W	Efficiency	100.00%
Sources Flux	4017.88 lm	Maximum value	394.91 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2368 mm	Width	55 mm	Height	60 mm
Rectangular Luminous Area		Length	2360 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area		0.094400 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.022837 m ²	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		22-05-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4017.88 lm	


LED Flux=9262,08lm LED Power=59W Eff=43% EfcLed=157lm/W EfcLum=64lm/W CCT=3000K Ra=80 SDCM=2 L70(6K)=50000h

C.I.E. 50 81 96 100 100
 F UTE 1.00 E

D DIN 5040
 B NBN

A30
 BZ 4


2368mm x 55mm



Semipiani C

180.0 — 0.0
 270.0 — 90.0

ULOR 0.02 %
 DLOR 99.98 %
 RN 0.02 %

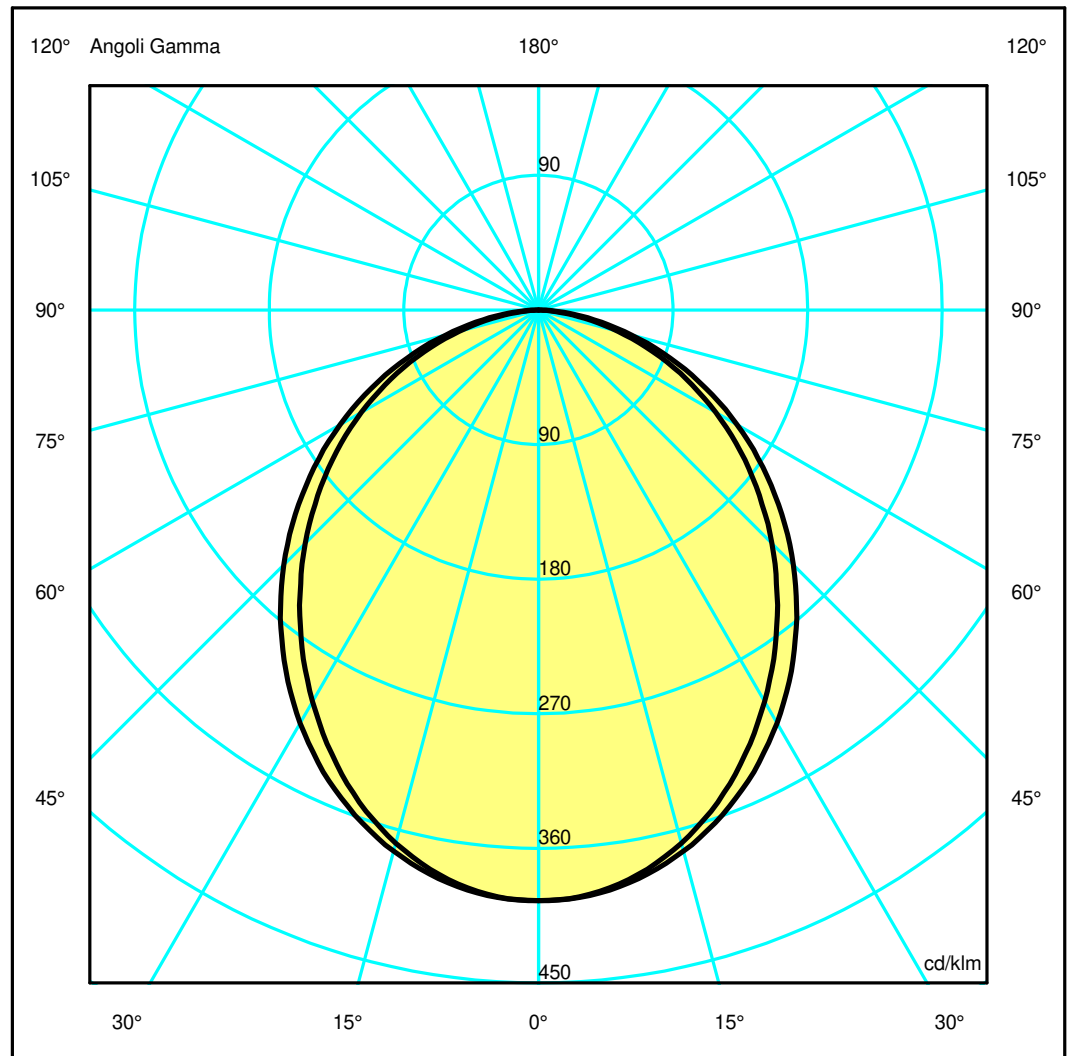

Luminaire

Code AT06005+AT10200
Name A.39 MODULO RCS TRIM DIF L=2368 830 DIM SILVER

Measurment.


Code FTS1801023
Name A.39 MODULO RCS TRIM DIF L=2368 830 DIM SILVER

Luminaire Flux	4017.88 lm	Luminaire Power	63.00 W	Efficacy	63.78 lm/W	Efficiency	100.00%
Sources Flux	4017.88 lm	Maximum value	394.91 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2368 mm	Width	55 mm	Height	60 mm
Rectangular Luminous Area		Length	2360 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area		0.094400 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.022837 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		22-05-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4017.88 lm	
LED Flux=9262,08lm LED Power=59W Eff=43% EfcLed=157lm/W EfcLum=64lm/W CCT=3000K Ra=80 SDCM=2 L70(6K)=50000h							
C.I.E.	50 81 96 100 100			D DIN 5040	A30		
F UTE	1.00 E			B NBN	BZ 4		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.15	2.31	3.46	4.62	5.77	OC	1.30	2.61	3.91	5.22	6.52
OB	1.15	2.31	3.46	4.62	5.77	OD	1.30	2.61	3.91	5.22	6.52

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1586.71	1575.74	1482.82	1314.95	1108.47	886.63	662.21	438.71	221.50	46.75
OB	1586.71	1575.74	1482.82	1314.95	1108.47	886.63	662.21	438.71	221.50	46.75
OC	1586.71	1578.99	1504.84	1368.68	1183.86	968.39	735.73	495.59	257.75	67.85
OD	1586.71	1578.99	1504.84	1368.68	1183.86	968.39	735.73	495.59	257.75	67.85

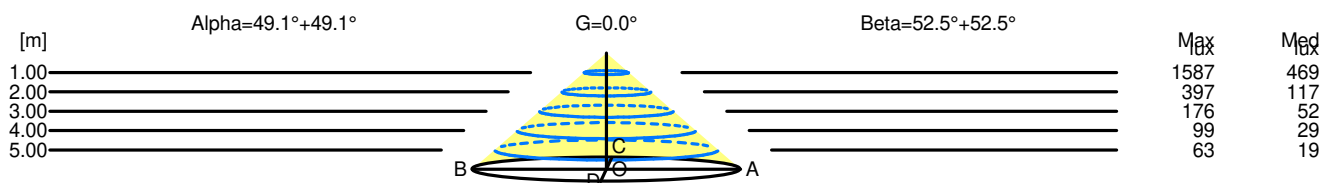

H[m]	D[m]	Max lux	Med lux	Alpha=49.1°+49.1°	G=0.0
1.00	2.31	1587	469		
2.00	4.62	397	117		
3.00	6.93	176	52		
4.00	9.23	99	29		
5.00	11.54	63	19		

H[m]	D[m]	Max lux	Med lux	Beta=52.5°+52.5°	G=0.0
1.00	2.61	1587	469		
2.00	5.22	397	117		
3.00	7.83	176	52		
4.00	10.44	99	29		
5.00	13.05	63	19		