


Luminaire

Code BH22505+BH16204
 Name A.39 RCS TRIM SHARP 2368 LB XF 940 SLV + 4X4 OPT. LB BLACK

Measurem.

Code FTS1900645
 Name A.39 RCS TRIM SHARP 2368 LB XF 940 SLV + 4X4 OPT. LB BLACK

Luminaire Flux	3337.13 lm	Luminaire Power	44.00 W	Efficacy	75.84 lm/W	Efficiency	100.00%
Sources Flux	3337.13 lm	Maximum value	1430.97 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	2368 mm	Width	40 mm	Height	111 mm	
Rectangular Luminous Area	Length	592 mm	Width	37 mm	Height	0 mm	
Horizontal Luminous Area	0.021904 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.005299 m2
Coordinate system	CG	Symmetry Type	Rotosymmetrical	Maximum Gamma Angle	180	Measurement Distance	3337.13 lm
Date	17-07-2017	Measurement Flux	3337.13 lm				
Measurement Distance	0.00						
LED Flux=4658,2lm LED Power=44W Eff=72% EfcLed=106lm/W EfcLum=76lm/W Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	99 100 100 100 100	D DIN 5040	A60				
F UTE	--	B NBN	BZ 1				

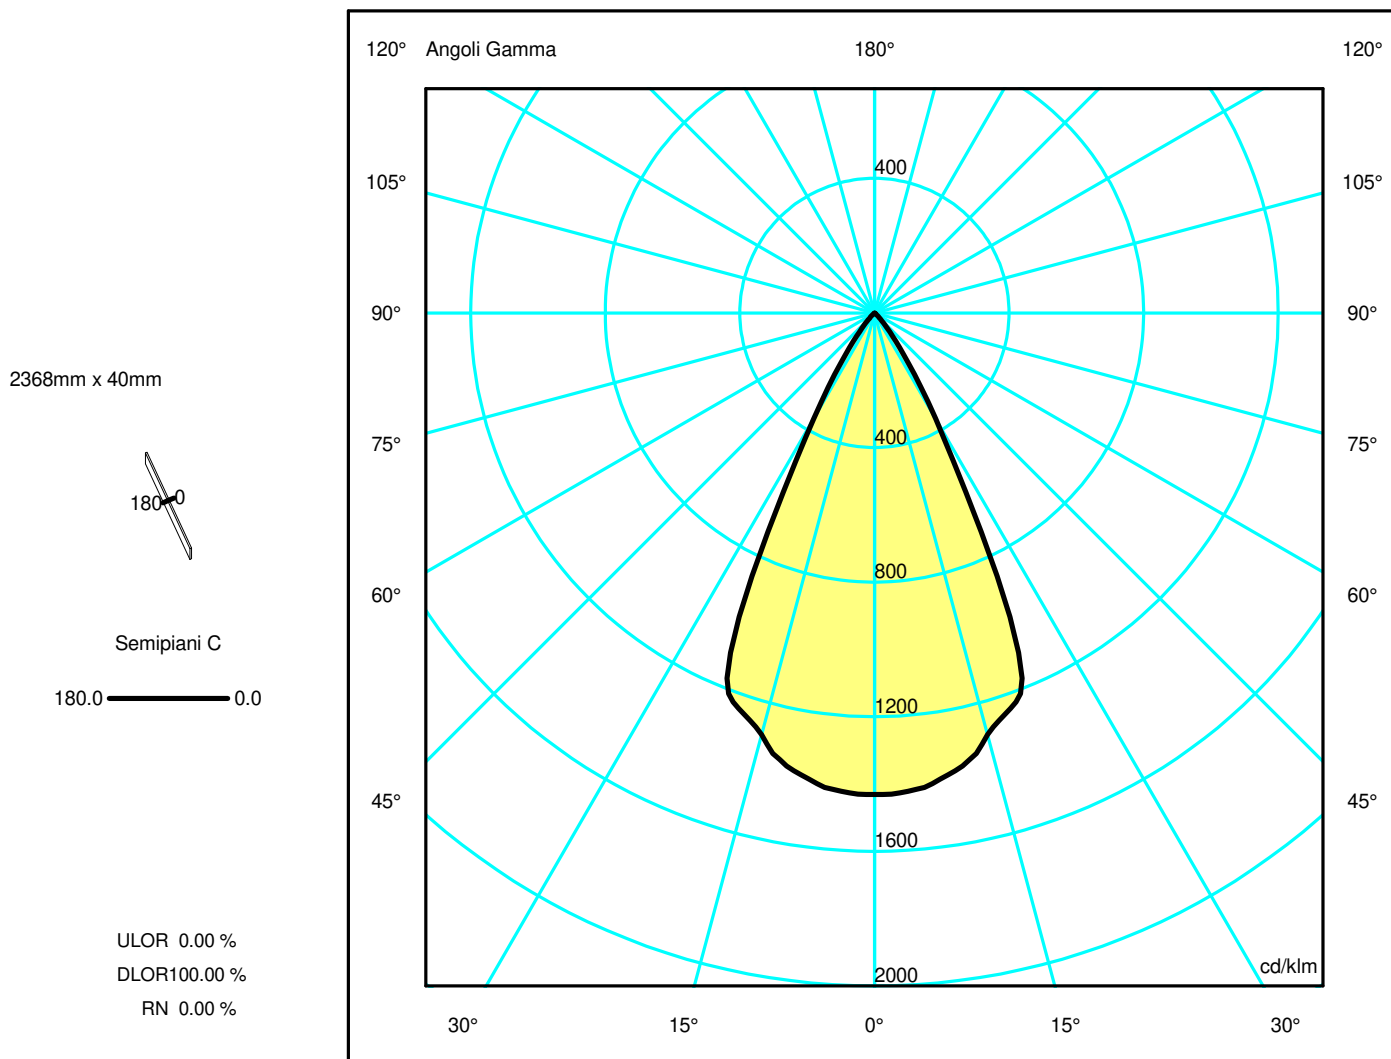

Luminaire

Code BH22505+BH16204
 Name A.39 RCS TRIM SHARP 2368 LB XF 940 SLV + 4X4 OPT. LB BLACK

Measurerm.

Code FTS1900645
 Name A.39 RCS TRIM SHARP 2368 LB XF 940 SLV + 4X4 OPT. LB BLACK

Luminaire Flux	3337.13 lm	Luminaire Power	44.00 W	Efficacy	75.84 lm/W	Efficiency	100.00%
Sources Flux	3337.13 lm	Maximum value	1430.97 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	2368 mm	Width	40 mm	Height	111 mm	
Rectangular Luminous Area	Length	592 mm	Width	37 mm	Height	0 mm	
Horizontal Luminous Area	0.021904 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.005299 m2
Coordinate system	CG	Symmetry Type	Rotosymmetrical	Date	17-07-2017	Maximum Gamma Angle	180
Measurement Distance	0.00	Measurement Flux	3337.13 lm				


LED Flux=4658,2lm LED Power=44W Eff=72% EfcLed=106lm/W EfcLum=76lm/W Ra=90 SDCM=2 L90(20K)=118000h

C.I.E.	99 100 100 100 100	D DIN 5040	A60
F UTE	--	B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.49	0.98	1.47	1.96	2.44	OC	0.49	0.98	1.47	1.96	2.44
OB	0.49	0.98	1.47	1.96	2.44	OD	0.49	0.98	1.47	1.96	2.44

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	4775.32	4740.99	4328.85	2879.40	509.83	74.37	5.79	0.00	0.00	0.00
OB	4775.32	4740.99	4328.85	2879.40	509.83	74.37	5.79	0.00	0.00	0.00
OC	4775.32	4740.99	4328.85	2879.40	509.83	74.37	5.79	0.00	0.00	0.00
OD	4775.32	4740.99	4328.85	2879.40	509.83	74.37	5.79	0.00	0.00	0.00

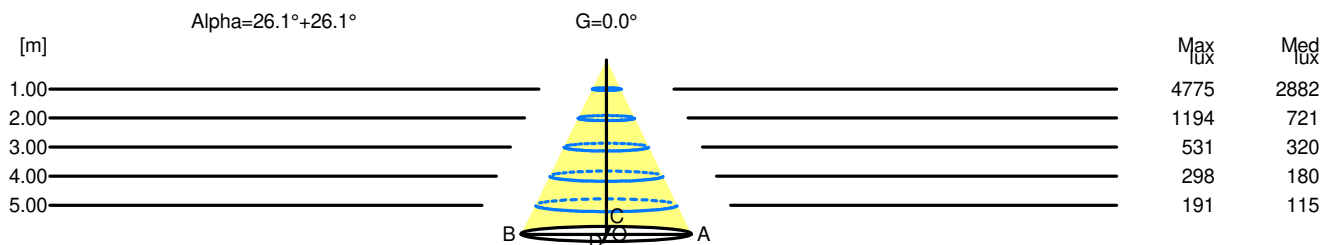

H[m]	D[m]	Max lux	Med lux	Alpha=26.1°+26.1°	G=0.0
1.00	0.98	4775	2882		
2.00	1.96	1194	721		
3.00	2.93	531	320		
4.00	3.91	298	180		
5.00	4.89	191	115		