


Luminaire

Code AT15505
 Name A.39 SOS/PLF CTRL EMIS 2368MM 830 ND SIL

Measurement

Code FTS1801862
 Name A.39 SOS/PLF CTRL EMIS 2368MM 830 ND SIL

Luminaire Flux	3798.38 lm	Luminaire Power	66.00 W	Efficacy	57.55 lm/W	Efficiency	100.00%
Sources Flux	3798.38 lm	Maximum value	596.97 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2368 mm	Width	45 mm	Height	85 mm
Rectangular Luminous Area		Length	2368 mm	Width	42 mm	Height	0 mm
Horizontal Luminous Area		0.099456 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.024061 m ²	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		04-09-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3798.38 lm	
LED Flux=9262,08lm LED Power=58W Eff=41% EfcLed=160lm/W EfcLum=58lm/W CCT=3000K Ra=80 SDCM=2 L70(6K)=50000h							
C.I.E.	72 97 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 2		

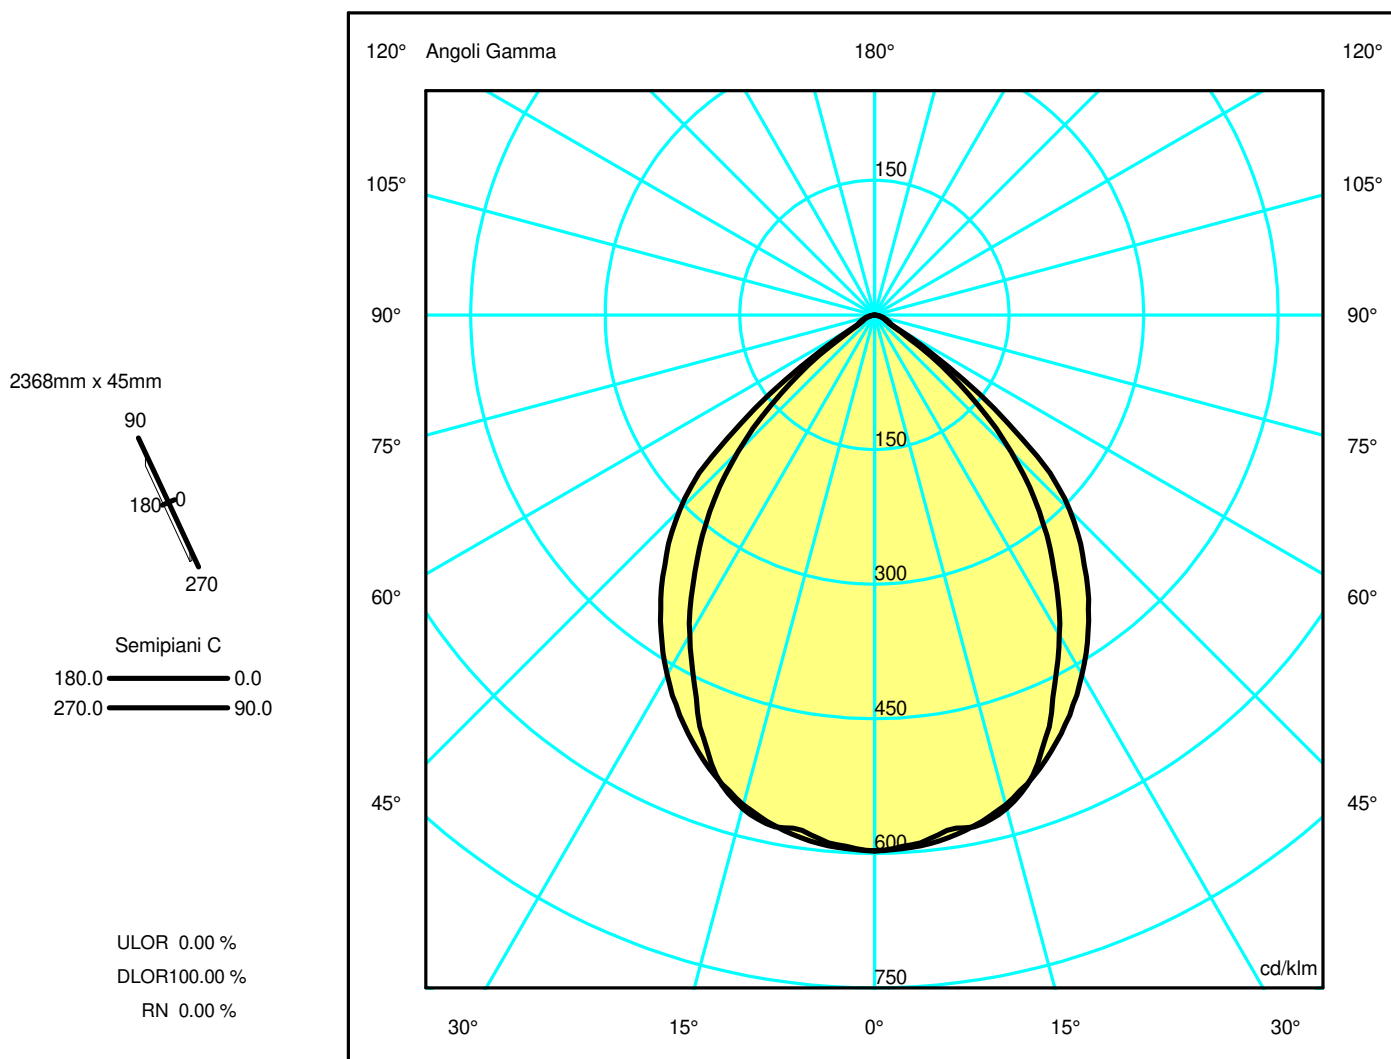

Luminaire

Code AT15505
Name A.39 SOS/PLF CTRL EMIS 2368MM 830 ND SIL

Measurerm.


Code FTS1801862
Name A.39 SOS/PLF CTRL EMIS 2368MM 830 ND SIL

Luminaire Flux	3798.38 lm	Luminaire Power	66.00 W	Efficacy	57.55 lm/W	Efficiency	100.00%
Sources Flux	3798.38 lm	Maximum value	596.97 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2368 mm	Width	45 mm	Height	85 mm
Rectangular Luminous Area		Length	2368 mm	Width	42 mm	Height	0 mm
Horizontal Luminous Area		0.099456 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.024061 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		04-09-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3798.38 lm	
LED Flux=9262,08lm LED Power=58W Eff=41% EfcLed=160lm/W EfcLum=58lm/W CCT=3000K Ra=80 SDCM=2 L70(6K)=50000h							
C.I.E.	72 97 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 2		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.81	1.62	2.43	3.24	4.05	OC	1.02	2.05	3.07	4.10	5.12
OB	0.81	1.62	2.43	3.24	4.05	OD	1.02	2.05	3.07	4.10	5.12

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2267.53	2242.74	2160.92	1787.18	1325.16	816.29	228.99	52.52	25.39	5.88
OB	2267.53	2242.74	2160.92	1787.18	1325.16	816.29	228.99	52.52	25.39	5.88
OC	2267.53	2254.53	2145.83	1910.10	1581.06	1167.85	380.59	65.85	36.54	8.45
OD	2267.53	2254.53	2145.83	1910.10	1581.06	1167.85	380.59	65.85	36.54	8.45

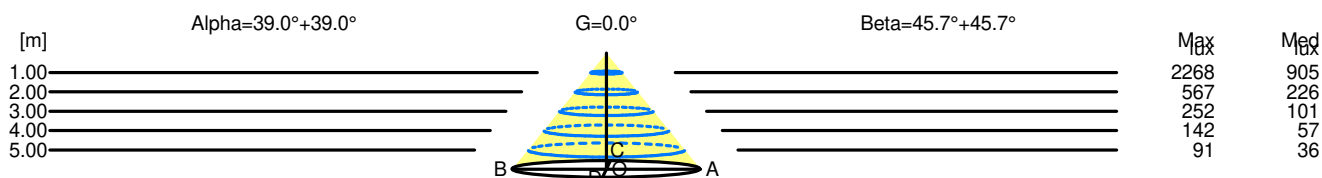

H[m]	D[m]	Max lux	Med lux	Alpha=39.0°+39.0°	G=0.0
1.00	1.62	2268	905		
2.00	3.24	567	226		
3.00	4.86	252	101		
4.00	6.48	142	57		
5.00	8.10	91	36		

H[m]	D[m]	Max lux	Med lux	Beta=45.7°+45.7°	G=0.0
1.00	2.05	2268	905		
2.00	4.10	567	226		
3.00	6.14	252	101		
4.00	8.19	142	57		
5.00	10.24	91	36		