

## Luminaire

Code BH02905+BH16304  
 Name A.39 S/C SHAR DIR 2368 HB 54 400K ND SIL + COVER 6X4 OPT. HB BLACK

## Measurem.

Code FTS1900247  
 Name A.39 S/C SHAR DIR 2368 HB 54 400K ND SIL + COVER 6X4 OPT. HB BLACK

Luminaire Flux	5005.70 lm	Luminaire Power	75.00 W	Efficacy	66.74 lm/W	Efficiency	100.00%
Sources Flux	5005.70 lm	Maximum value	1430.97 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	2368 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	888 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.032856 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.007949 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		17-07-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5005.70 lm	


LED Flux=6987,3lm LED Power=63W Eff=72% EfcLed=111lm/W EfcLum=67lm/W Ra=90 SDCM=2 L90(20K)=118000h

C.I.E. 99 100 100 100 100  
 F UTE --

D DIN 5040  
 B NBN

A60  
 BZ 1


2368mm x 40mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
 DLOR 100.00 %  
 RN 0.00 %

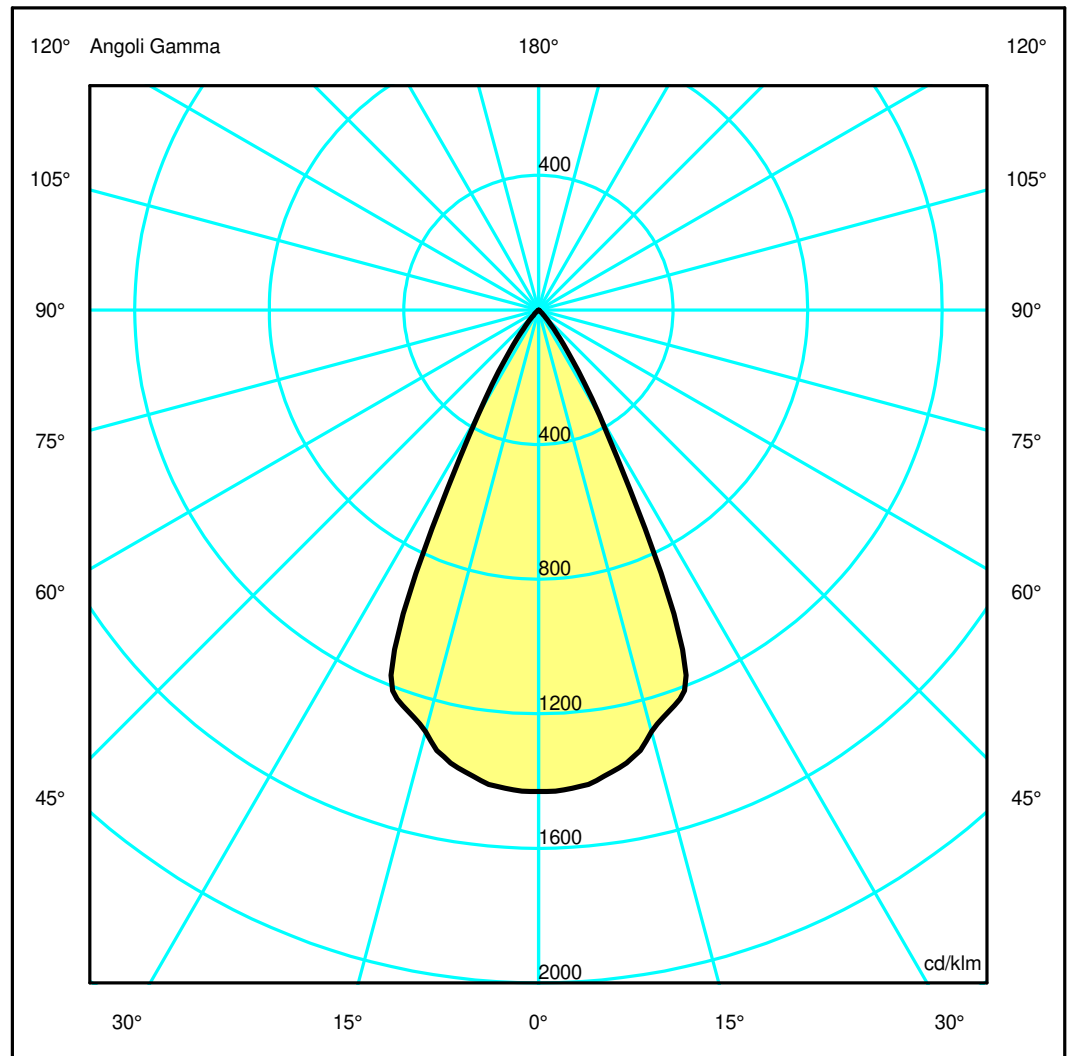

## Luminaire

Code BH02905+BH16304  
 Name A.39 S/C SHAR DIR 2368 HB 54 400K ND SIL + COVER 6X4 OPT. HB BLACK

## Measurerm.

Code FTS1900247  
 Name A.39 S/C SHAR DIR 2368 HB 54 400K ND SIL + COVER 6X4 OPT. HB BLACK

Luminaire Flux	5005.70 lm	Luminaire Power	75.00 W	Efficacy	66.74 lm/W	Efficiency	100.00%
Sources Flux	5005.70 lm	Maximum value	1430.97 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	2368 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	888 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.032856 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.007949 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		17-07-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5005.70 lm	


LED Flux=6987,3lm LED Power=63W Eff=72% EfcLed=111lm/W EfcLum=67lm/W Ra=90 SDCM=2 L90(20K)=118000h

C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.49	0.98	1.47	1.96	2.44	OC	0.49	0.98	1.47	1.96	2.44
OB	0.49	0.98	1.47	1.96	2.44	OD	0.49	0.98	1.47	1.96	2.44

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	7162.99	7111.50	6493.28	4319.11	764.75	111.55	8.69	0.00	0.00	0.00
OB	7162.99	7111.50	6493.28	4319.11	764.75	111.55	8.69	0.00	0.00	0.00
OC	7162.99	7111.50	6493.28	4319.11	764.75	111.55	8.69	0.00	0.00	0.00
OD	7162.99	7111.50	6493.28	4319.11	764.75	111.55	8.69	0.00	0.00	0.00

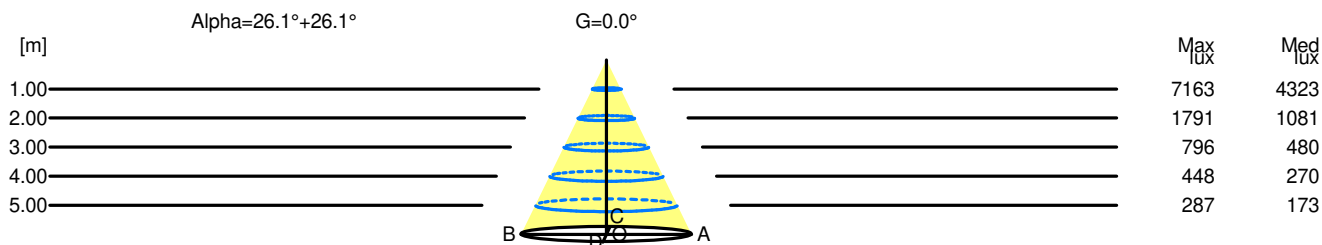

H[m]	D[m]	Max lux	Med lux	Alpha=26.1°+26.1°	G=0.0
1.00	0.98	7163	4323		
2.00	1.96	1791	1081		
3.00	2.93	796	480		
4.00	3.91	448	270		
5.00	4.89	287	173		