

Luminaire

Code M2882W00+M186700

Name ALGORITMO SYSTEM PIASTRA CABLATA DIRETTA LED 3000K NON DIMMERABILE 1184MM+OTTICA DARKLIGHT 1184MM PER LED

Measurem.

Code FTS1601393

Name ALGORITMO SYSTEM PIASTRA CABLATA DIRETTA LED 3000K NON DIMMERABILE 1184MM+OTTICA DARKLIGHT 1184MM PER LED


Luminaire Flux	1569 lm	Luminaire Power	34.0 W	Efficacy	46.134 lm/W	Efficiency	100.00%
Source Flux	1569 lm	Maximum value	582.43 cd/klm	Position	C=0.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1185 mm	Width	45 mm	Height	110 mm
Rectangular Luminous Area		Length	1185 mm	Width	32 mm	Height	0 mm
Horizontal Luminous Area		0.037920 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.009174 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-06-2016		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1569 lm	

LED Flux=4357,13lm LED Power=27W Eff=36% EfcLed=161lm/W EfcLum=46lm/W Ra=80 SDCM=3 L70(6K)=50000h

C.I.E. 70 96 99 100 100
F UTE 1.00 C

D DIN 5040 A50
B NBN BZ 2


1185mm x 45mm



Semipiani C

180.0 — 0.0
270.0 — 90.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

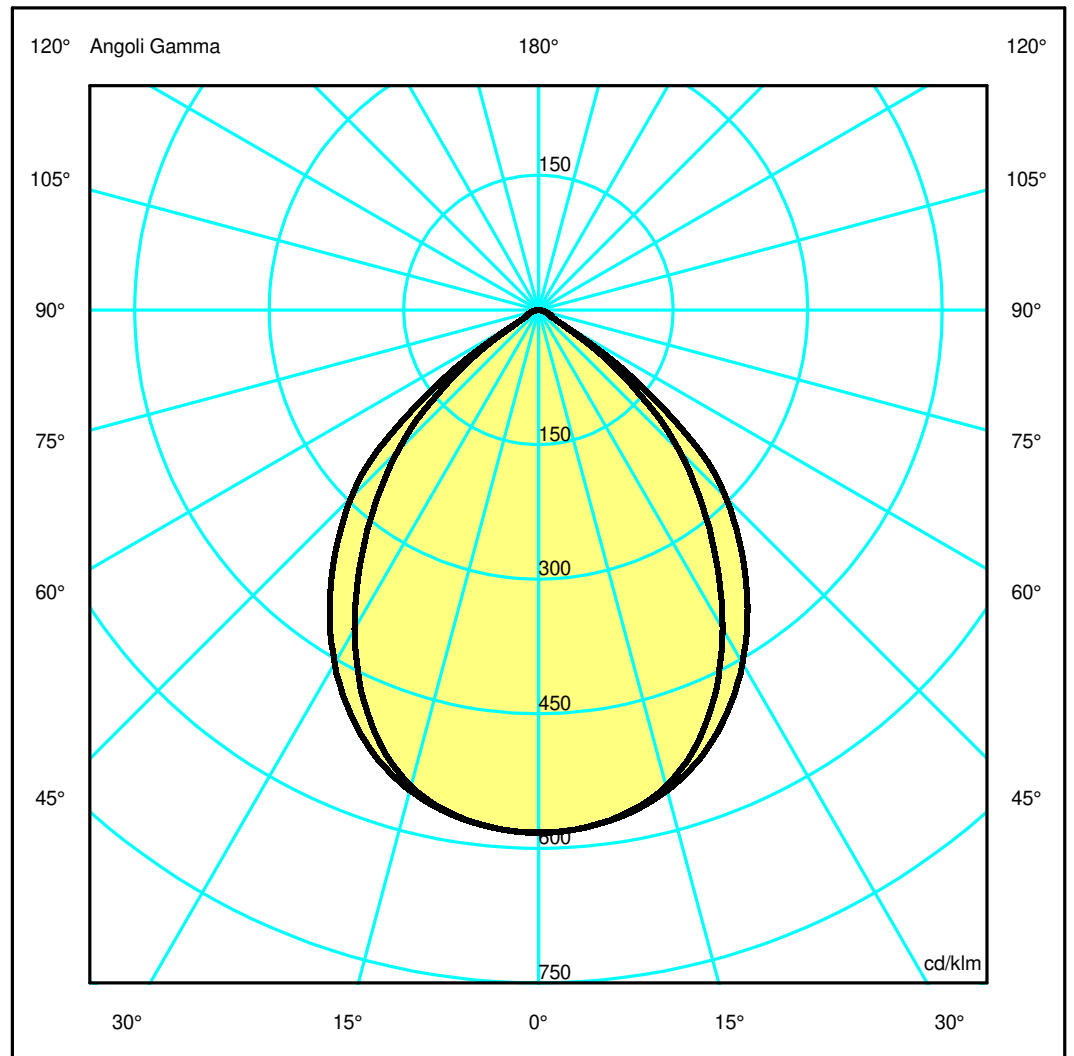

Luminaire

Code M2882W00+M186700
 Name ALGORITMO SYSTEM PIASTRA CABLATA DIRETTA LED 3000K NON DIMMERABILE 1184MM+OTTICA DARKLIGHT 1184MM PER LED

Measurement

Code FTS1601393
 Name ALGORITMO SYSTEM PIASTRA CABLATA DIRETTA LED 3000K NON DIMMERABILE 1184MM+OTTICA DARKLIGHT 1184MM PER LED

Luminaire Flux	1569 lm	Luminaire Power	34.0 W	Efficacy	46.134 lm/W	Efficiency	100.00%
Source Flux	1569 lm	Maximum value	582.43 cd/klm	Position	C=0.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1185 mm	Width	45 mm	Height	110 mm
Rectangular Luminous Area		Length	1185 mm	Width	32 mm	Height	0 mm
Horizontal Luminous Area		0.037920 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.009174 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-06-2016		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1569 lm	


LED Flux=4357,13lm LED Power=27W Eff=36% EfcLed=161lm/W EfcLum=46lm/W Ra=80 SDCM=3 L70(6K)=50000h

C.I.E.	70 96 99 100 100	D DIN 5040	A50
F UTE	1.00 C	B NBN	BZ 2

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.82	1.64	2.46	3.29	4.11	OC	1.01	2.02	3.03	4.05	5.06
OB	0.82	1.64	2.46	3.29	4.11	OD	1.01	2.02	3.03	4.05	5.06

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	913.30	908.38	861.12	734.30	544.10	348.60	124.01	25.40	13.82	4.36
OB	913.30	908.38	861.12	734.30	544.10	348.60	124.01	25.40	13.82	4.36
OC	913.30	908.55	869.23	778.15	636.95	463.21	178.72	20.37	10.55	2.45
OD	913.30	908.55	869.23	778.15	636.95	463.21	178.72	20.37	10.55	2.45

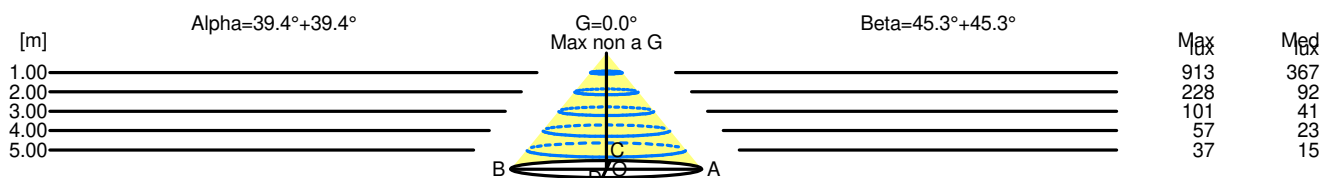

H[m]	D[m]	Max lux	Med lux	Alpha=39.4°+39.4°	G=0.0° Max non a G
1.00	1.64	913	367		
2.00	3.29	228	92		
3.00	4.93	101	41		
4.00	6.57	57	23		
5.00	8.22	37	15		

H[m]	D[m]	Max lux	Med lux	Beta=45.3°+45.3°	G=0.0° Max non a G
1.00	2.02	913	367		
2.00	4.05	228	92		
3.00	6.07	101	41		
4.00	8.09	57	23		
5.00	10.11	37	15		