

Luminaire


Code 1425000A
Name ALPHABET OF LIGHT SR LINEARE 120 EU-USA

Measurement

Code FTS1900830
Name ALPHABET OF LIGHT SR LINEARE 120 EU-USA

Luminaire Flux	3484.08 lm	Luminaire Power	29.00 W	Efficacy	120.14 lm/W	Efficiency	100.00%
Sources Flux	3484.08 lm	Maximum value	158.36 cd/klm	Position	C=45.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1200 mm	Width	50 mm	Height	50 mm
Rectangular Luminous Area		Length	1200 mm	Width	50 mm	Height	50 mm
Horizontal Luminous Area		0.060000 m ²		Emitting area on Plane 180°		0.060000 m ²	
Emitting area on Plane 0°		0.060000 m ²		Emitting area on Plane 270°		0.002500 m ²	
Emitting area on Plane 90°		0.002500 m ²		Glare area at 76°		0.072733 m ²	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		18-09-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3484.08 lm	
LED Flux=4300,8lm LED Power=29W Eff=81% EfcLed=148lm/W EfcLum=120lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	33 60 83 69 100			D DIN 5040		B21	
F UTE	0.69 H + 0.31 T			B NBN		BZ 6	


1200mm x 50mm



Semipiani C

180.0 — 0.0
270.0 — 90.0

ULOR 30.60 %
DLOR 69.40 %
RN 30.60 %

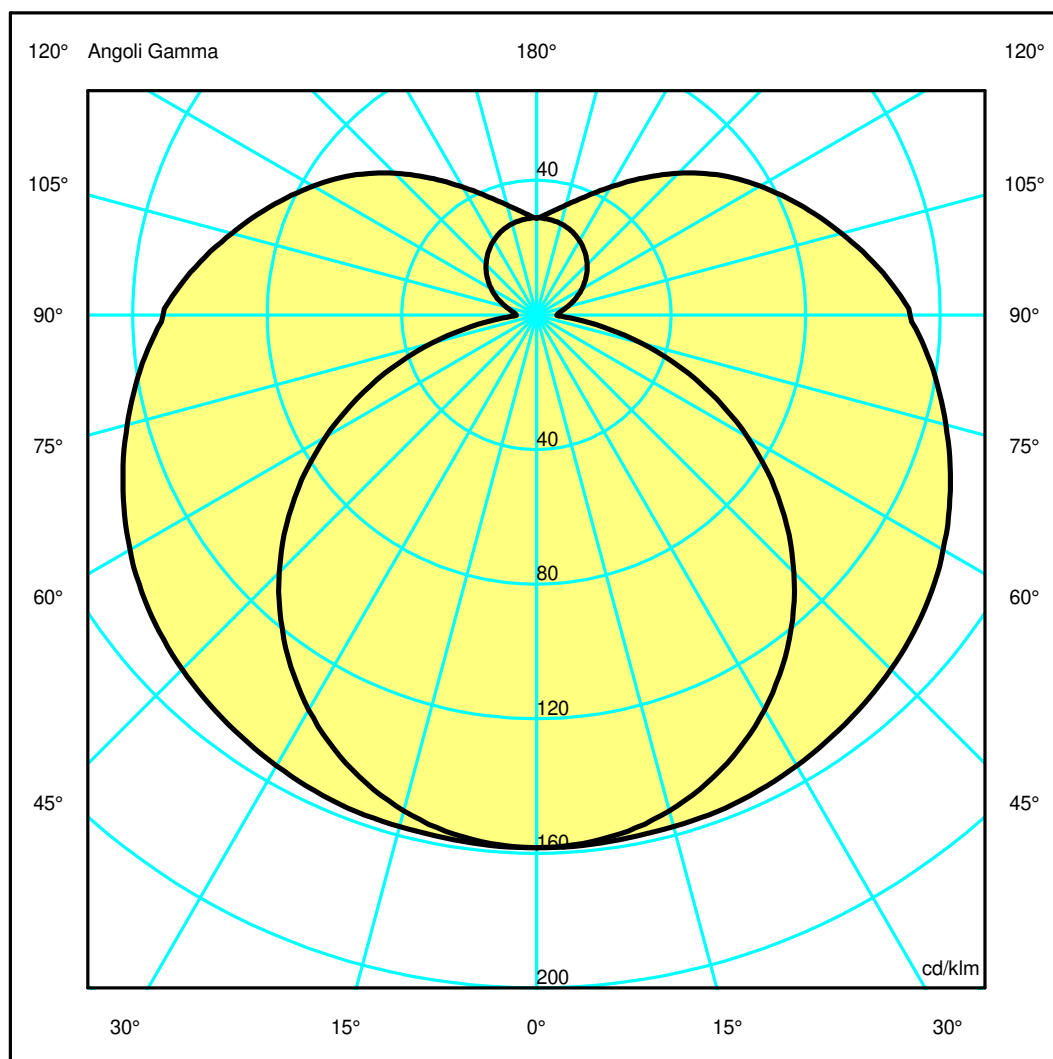

Luminaire

Code 1425000A
 Name ALPHABET OF LIGHT SR LINEARE 120 EU-USA

Measurerm.

Code FTS1900830
 Name ALPHABET OF LIGHT SR LINEARE 120 EU-USA

Luminaire Flux	3484.08 lm	Luminaire Power	29.00 W	Efficacy	120.14 lm/W	Efficiency	100.00%
Sources Flux	3484.08 lm	Maximum value	158.36 cd/klm	Position	C=45.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1200 mm	Width	50 mm	Height	50 mm
Rectangular Luminous Area		Length	1200 mm	Width	50 mm	Height	50 mm
Horizontal Luminous Area		0.060000 m2		Emitting area on Plane 180°		0.060000 m2	
Emitting area on Plane 0°		0.060000 m2		Emitting area on Plane 270°		0.002500 m2	
Emitting area on Plane 90°		0.002500 m2		Glare area at 76°		0.072733 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		18-09-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3484.08 lm	
LED Flux=4300,8lm LED Power=29W Eff=81% EfcLed=148lm/W EfcLum=120lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	33 60 83 69 100			D DIN 5040	B21		
F UTE	0.69 H + 0.31 T			B NBN	BZ 6		

Apertura a destra non trovata, gamma =0

Apertura a destra non trovata, gamma =0

Apertura a destra non trovata, gamma =0