

Luminaire

Code 2148C10A
Name AoL SYSTEM C/W 60° MAST.TERM. SX 3500K

Measurem.

Code FTS1902623
Name AoL SYSTEM C/W 60° MAST.TERM. SX 3500K

Luminaire Flux	701.32 lm	Luminaire Power	8.00 W	Efficacy	87.66 lm/W	Efficiency	100.00%
Lamps Flux	701.32 lm	Maximum value	162.58 cd/klm	Position	C=20.00 G=5.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	475 mm	Width	50 mm	Height	50 mm
Rectangular Luminous Area		Length	475 mm	Width	50 mm	Height	50 mm
Horizontal Luminous Area		0.023750 m2		Emitting area on Plane 180°		0.023750 m2	
Emitting area on Plane 0°		0.023750 m2		Emitting area on Plane 270°		0.002500 m2	
Emitting area on Plane 90°		0.002500 m2		Glare area at 76°		0.028790 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		17-05-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		701.32 lm	


LED Flux=917lm LED Power=8W Eff=76% EfcLed=115lm/W EfcLum=88lm/W CCT=3500K Ra=80 SDCM=3 L70(6K)=50000h

C.I.E. 33 61 83 70 100
F UTE 0.70 H + 0.30 T

D DIN 5040
B NBN

B21
BZ 6


475mm x 50mm



Semipiani C

180.0 ——— 0.0
270.0 - - - - - 90.0

ULOR 30.45 %
DLOR 69.55 %
RN 30.45 %

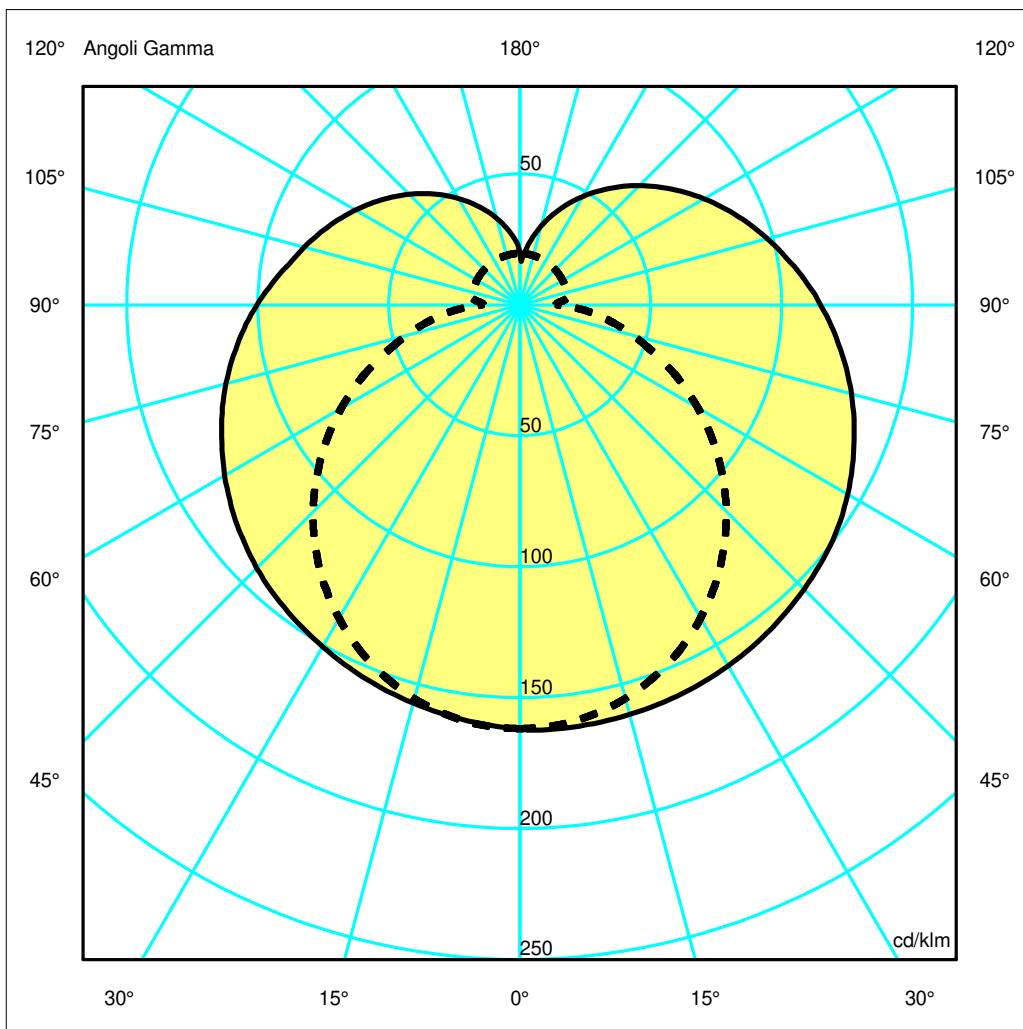

Luminaire							
Code	2148C10A						
Name	AoL SYSTEM C/W 60° MAST.TERM. SX 3500K						
Measurement							
Code	FTS1902623						
Name	AoL SYSTEM C/W 60° MAST.TERM. SX 3500K						
Luminaire Flux	701.32 lm	Luminaire Power	8.00 W	Efficacy	87.66 lm/W	Efficiency	100.00%
Lamps Flux	701.32 lm	Maximum value	162.58 cd/klm	Position	C=20.00 G=5.00	CG Sym. on planes 0-180	
Rectangular Luminaire		Length	475 mm	Width	50 mm	Height	50 mm
Rectangular Luminous Area		Length	475 mm	Width	50 mm	Height	50 mm
Horizontal Luminous Area		0.023750 m2		Emitting area on Plane 180°		0.023750 m2	
Emitting area on Plane 0°		0.023750 m2		Emitting area on Plane 270°		0.002500 m2	
Emitting area on Plane 90°		0.002500 m2		Glare area at 76°		0.028790 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		17-05-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		701.32 lm	
LED Flux=917lm LED Power=8W Eff=76% EfcLed=115lm/W EfcLum=88lm/W CCT=3500K Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	33 61 83 70 100			D DIN 5040	B21		
F UTE	0.70 H + 0.30 T			B NBN	BZ 6		

Apertura a destra non trovata, gamma =3

Apertura a destra non trovata, gamma =3

Apertura a destra non trovata, gamma =3