

Luminaire

Code 2138C10A
Name AoL SYSTEM C/W LIN.180 MAST.TERM. 3500K

Measurem.

Code FTS1902596
Name AoL SYSTEM C/W LIN.180 MAST.TERM. 3500K


Luminaire Flux	2977.01 lm	Luminaire Power	33.00 W	Efficacy	90.21 lm/W	Efficiency	100.00%
Lamps Flux	2977.01 lm	Maximum value	156.12 cd/klm	Position	C=5.00 G=5.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1800 mm	Width	50 mm	Height	50 mm
Rectangular Luminous Area		Length	1800 mm	Width	50 mm	Height	50 mm
Horizontal Luminous Area	0.090000 m2			Emitting area on Plane 180°	0.090000 m2		
Emitting area on Plane 0°	0.090000 m2			Emitting area on Plane 270°	0.002500 m2		
Emitting area on Plane 90°	0.002500 m2			Glare area at 76°	0.109100 m2		
Coordinate system	CG	Symmetry Type	Double Symmetrical				
Date	05-09-2019	Maximum Gamma Angle	180				
Measurement Distance	0.00	Measurement Flux	2977.01 lm				

LED Flux=3732lm LED Power=33W Eff=80% EfcLed=113lm/W EfcLum=90lm/W CCT=3500K Ra=80 SDCM=3 L70(6K)=50000h

C.I.E. 33 60 82 69 100
F UTE 0.69 H + 0.31 T

D DIN 5040
B NBN

B21
BZ 6

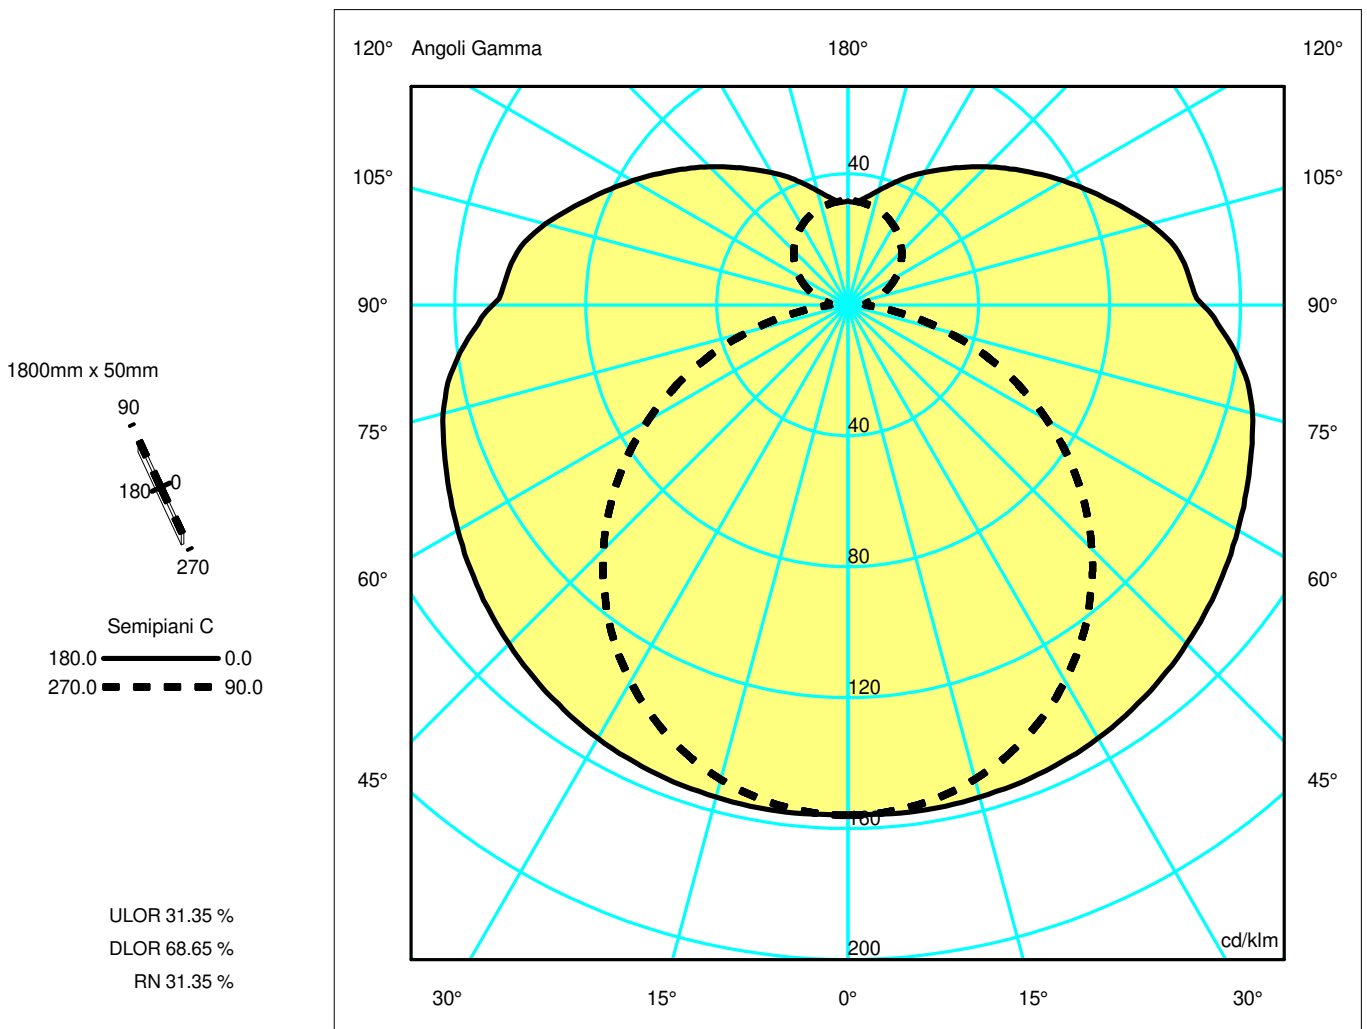

Luminaire

Code 2138C10A
 Name AoL SYSTEM C/W LIN.180 MAST.TERM. 3500K

Measur.

Code FTS1902596
 Name AoL SYSTEM C/W LIN.180 MAST.TERM. 3500K

Luminaire Flux	2977.01 lm	Luminaire Power	33.00 W	Efficacy	90.21 lm/W	Efficiency	100.00%
Lamps Flux	2977.01 lm	Maximum value	156.12 cd/klm	Position	C=5.00 G=5.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1800 mm	Width	50 mm	Height	50 mm
Rectangular Luminous Area		Length	1800 mm	Width	50 mm	Height	50 mm
Horizontal Luminous Area		0.090000 m2		Emitting area on Plane 180°		0.090000 m2	
Emitting area on Plane 0°		0.090000 m2		Emitting area on Plane 270°		0.002500 m2	
Emitting area on Plane 90°		0.002500 m2		Glare area at 76°		0.109100 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		05-09-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2977.01 lm	
LED Flux=3732lm LED Power=33W Eff=80% EfcLed=113lm/W EfcLum=90lm/W CCT=3500K Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	33 60 82 69 100			D DIN 5040	B21		
F UTE	0.69 H + 0.31 T			B NBN	BZ 6		

Apertura a destra non trovata, gamma =8

Apertura a destra non trovata, gamma =8

Apertura a destra non trovata, gamma =8