


Luminaire

Code 2123C10A
Name AoL SYSTEM S 60° SLAVE INTERM 3500K

Measurement

Code FTS1902622
Name AoL SYSTEM S 60° SLAVE INTERM 3500K

| | | | | | | | |
|--|-----------------|-------------------------|---------------|-----------------------------|----------------|-------------------------|----------------------|
| Luminaire Flux | 701.32 lm | Luminaire Power | 8.00 W | Efficacy | 87.66 lm/W | Efficiency | 100.00% |
| Sources Flux | 701.32 lm | Maximum value | 162.58 cd/klm | Position | C=20.00 G=5.00 | CG | Sym. on planes 0-180 |
| Rectangular Luminaire | | Length | 475 mm | Width | 50 mm | Height | 50 mm |
| Rectangular Luminous Area | | Length | 475 mm | Width | 50 mm | Height | 50 mm |
| Horizontal Luminous Area | | 0.023750 m ² | | Emitting area on Plane 180° | | 0.023750 m ² | |
| Emitting area on Plane 0° | | 0.023750 m ² | | Emitting area on Plane 270° | | 0.002500 m ² | |
| Emitting area on Plane 90° | | 0.002500 m ² | | Glare area at 76° | | 0.028790 m ² | |
| Coordinate system | | CG | | Symmetry Type | | Sym. on planes 0-180 | |
| Date | | 17-05-2019 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 701.32 lm | |
| LED Flux=917lm LED Power=8W Eff=76% EfcLed=115lm/W EfcLum=88lm/W CCT=3500K Ra=80 SDCM=3 L70(6K)=50000h | | | | | | | |
| C.I.E. | 33 61 83 70 100 | | | D DIN 5040 | B21 | | |
| F UTE | 0.70 H + 0.30 T | | | B NBN | BZ 6 | | |

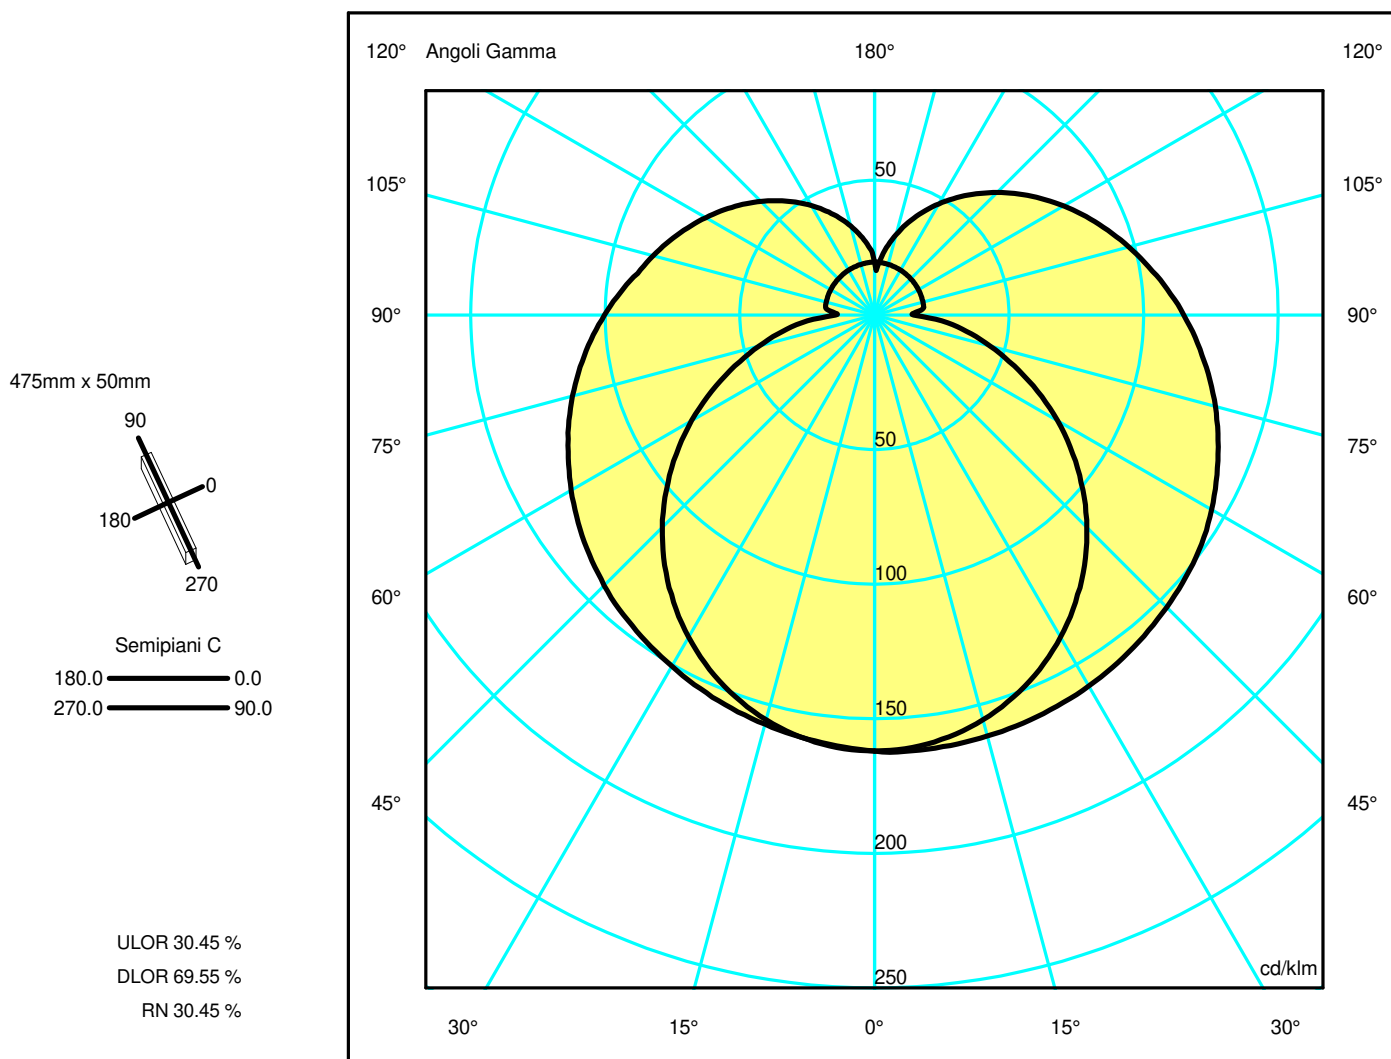

Luminaire

Code 2123C10A
 Name AoL SYSTEM S 60° SLAVE INTERM 3500K

Measurem.

Code FTS1902622
 Name AoL SYSTEM S 60° SLAVE INTERM 3500K

| | | | | | | | |
|--|-----------------|-----------------|---------------|-----------------------------|----------------|----------------------|----------------------|
| Luminaire Flux | 701.32 lm | Luminaire Power | 8.00 W | Efficacy | 87.66 lm/W | Efficiency | 100.00% |
| Sources Flux | 701.32 lm | Maximum value | 162.58 cd/klm | Position | C=20.00 G=5.00 | CG | Sym. on planes 0-180 |
| Rectangular Luminaire | | Length | 475 mm | Width | 50 mm | Height | 50 mm |
| Rectangular Luminous Area | | Length | 475 mm | Width | 50 mm | Height | 50 mm |
| Horizontal Luminous Area | | 0.023750 m2 | | Emitting area on Plane 180° | | 0.023750 m2 | |
| Emitting area on Plane 0° | | 0.023750 m2 | | Emitting area on Plane 270° | | 0.002500 m2 | |
| Emitting area on Plane 90° | | 0.002500 m2 | | Glare area at 76° | | 0.028790 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Sym. on planes 0-180 | |
| Date | | 17-05-2019 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 701.32 lm | |
| LED Flux=917lm LED Power=8W Eff=76% EfcLed=115lm/W EfcLum=88lm/W CCT=3500K Ra=80 SDCM=3 L70(6K)=50000h | | | | | | | |
| C.I.E. | 33 61 83 70 100 | | | D DIN 5040 | B21 | | |
| F UTE | 0.70 H + 0.30 T | | | B NBN | BZ 6 | | |

Apertura a destra non trovata, gamma =3

Apertura a destra non trovata, gamma =3

Apertura a destra non trovata, gamma =3