

Luminaire

Code 2150C10A
Name AoL SYSTEM C/W 60° MAST.INTERM 3500K

Measurement

Code FTS1902625
Name AoL SYSTEM C/W 60° MAST.INTERM 3500K

Luminaire Flux	701.32 lm	Luminaire Power	8.00 W	Efficacy	87.66 lm/W	Efficiency	100.00%
Sources Flux	701.32 lm	Maximum value	162.58 cd/klm	Position	C=20.00 G=5.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	475 mm	Width	50 mm	Height	50 mm
Rectangular Luminous Area		Length	475 mm	Width	50 mm	Height	50 mm
Horizontal Luminous Area		0.023750 m ²		Emitting area on Plane 180°		0.023750 m ²	
Emitting area on Plane 0°		0.023750 m ²		Emitting area on Plane 270°		0.002500 m ²	
Emitting area on Plane 90°		0.002500 m ²		Glare area at 76°		0.028790 m ²	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		17-05-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		701.32 lm	


LED Flux=917lm LED Power=8W Eff=76% EfcLed=115lm/W EfcLum=88lm/W CCT=3500K Ra=80 SDCM=3 L70(6K)=50000h

C.I.E. 33 61 83 70 100
F UTE 0.70 H + 0.30 T

D DIN 5040
B NBN

B21
BZ 6

475mm x 50mm




Sempiani C

180.0 — 0.0
270.0 — 90.0

ULOR 30.45 %

DLOR 69.55 %

RN 30.45 %

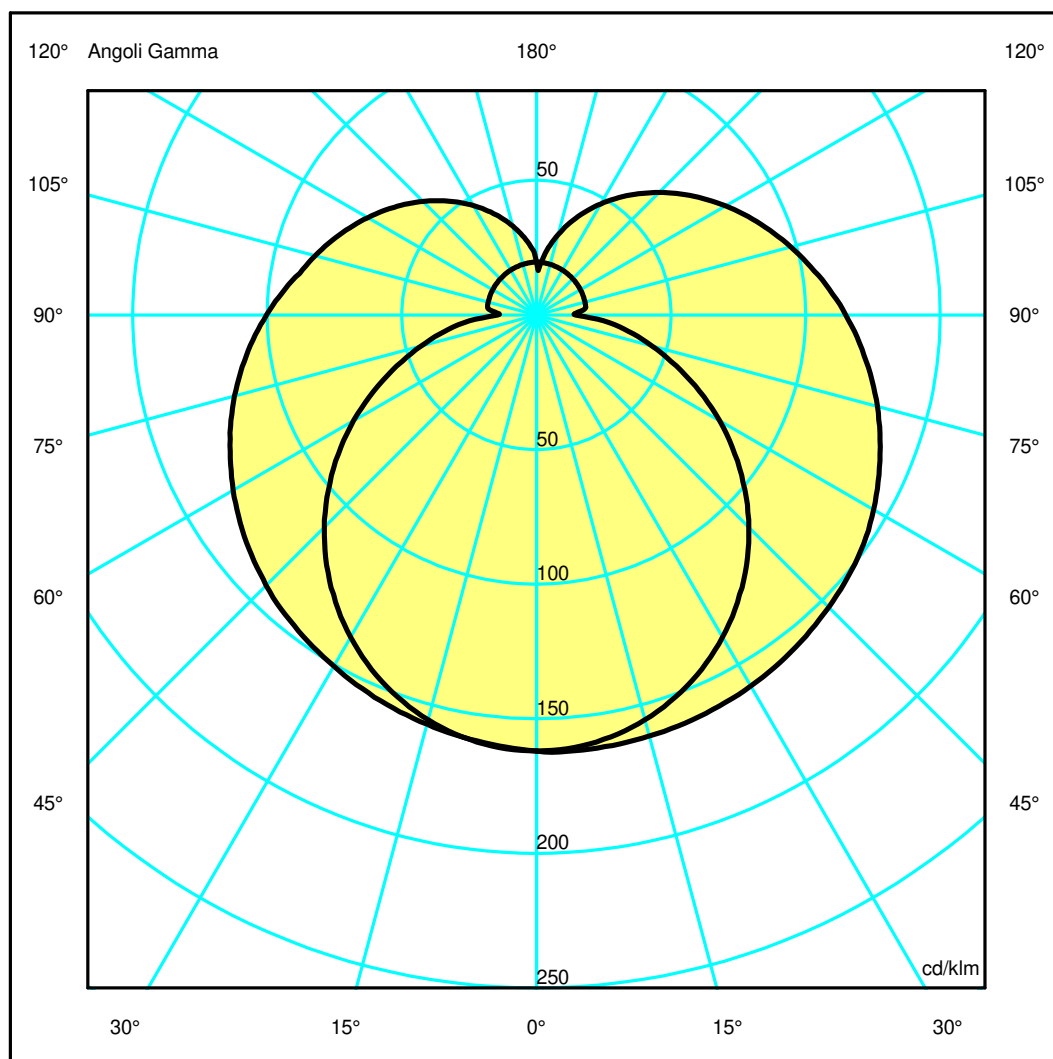

Luminaire

Code 2150C10A
 Name AoL SYSTEM C/W 60° MAST.INTERM 3500K

Measurem.

Code FTS1902625
 Name AoL SYSTEM C/W 60° MAST.INTERM 3500K

Luminaire Flux	701.32 lm	Luminaire Power	8.00 W	Efficacy	87.66 lm/W	Efficiency	100.00%
Sources Flux	701.32 lm	Maximum value	162.58 cd/klm	Position	C=20.00 G=5.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	475 mm	Width	50 mm	Height	50 mm
Rectangular Luminous Area		Length	475 mm	Width	50 mm	Height	50 mm
Horizontal Luminous Area		0.023750 m2		Emitting area on Plane 180°		0.023750 m2	
Emitting area on Plane 0°		0.023750 m2		Emitting area on Plane 270°		0.002500 m2	
Emitting area on Plane 90°		0.002500 m2		Glare area at 76°		0.028790 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		17-05-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		701.32 lm	
LED Flux=917lm LED Power=8W Eff=76% EfcLed=115lm/W EfcLum=88lm/W CCT=3500K Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	33 61 83 70 100			D DIN 5040	B21		
F UTE	0.70 H + 0.30 T			B NBN	BZ 6		

Apertura a destra non trovata, gamma =3

Apertura a destra non trovata, gamma =3

Apertura a destra non trovata, gamma =3