

## Luminaire

Code 2102010A  
Name AoL SYSTEM S LIN.60 SLAVE INTERM 3000K

## Measurement

Code FTS1902518  
Name AoL SYSTEM S LIN.60 SLAVE INTERM 3000K

Luminaire Flux	977.18 lm	Luminaire Power	11.00 W	Efficacy	88.83 lm/W	Efficiency	100.00%
Sources Flux	977.18 lm	Maximum value	156.12 cd/klm	Position	C=5.00 G=5.00	CG	Double Symmetrical
Rectangular Luminaire		Length	580 mm	Width	50 mm	Height	50 mm
Rectangular Luminous Area		Length	580 mm	Width	50 mm	Height	49 mm
Horizontal Luminous Area		0.029000 m <sup>2</sup>		Emitting area on Plane 180°		0.029000 m <sup>2</sup>	
Emitting area on Plane 0°		0.029000 m <sup>2</sup>		Emitting area on Plane 270°		0.002500 m <sup>2</sup>	
Emitting area on Plane 90°		0.002500 m <sup>2</sup>		Glare area at 76°		0.035154 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		05-09-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		977.18 lm	


LED Flux=1225lm LED Power=11W Eff=80% EfcLed=111lm/W EfcLum=89lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=50000h

C.I.E. 33 60 82 69 100  
F UTE 0.69 H + 0.31 T

D DIN 5040  
B NBN

B21  
BZ 6


580mm x 50mm



Semipiani C

180.0 — 0.0  
270.0 — 90.0

ULOR 31.35 %  
DLOR 68.65 %  
RN 31.35 %

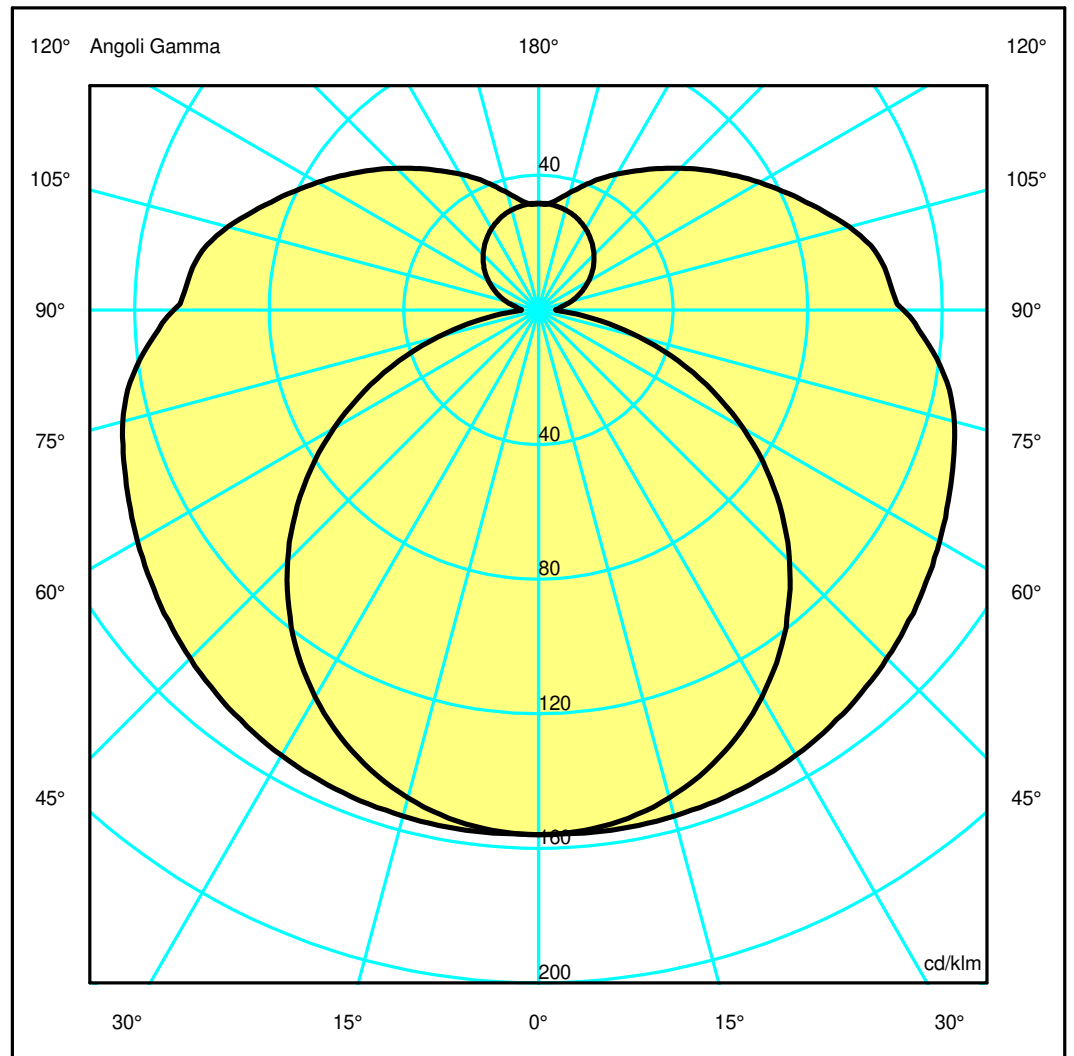

**Luminaire**

Code 2102010A  
 Name AoL SYSTEM S LIN.60 SLAVE INTERM 3000K

**Measurem.**

Code FTS1902518  
 Name AoL SYSTEM S LIN.60 SLAVE INTERM 3000K

Luminaire Flux	977.18 lm	Luminaire Power	11.00 W	Efficacy	88.83 lm/W	Efficiency	100.00%
Sources Flux	977.18 lm	Maximum value	156.12 cd/klm	Position	C=5.00 G=5.00	CG	Double Symmetrical
Rectangular Luminaire		Length	580 mm	Width	50 mm	Height	50 mm
Rectangular Luminous Area		Length	580 mm	Width	50 mm	Height	49 mm
Horizontal Luminous Area		0.029000 m2		Emitting area on Plane 180°		0.029000 m2	
Emitting area on Plane 0°		0.029000 m2		Emitting area on Plane 270°		0.002500 m2	
Emitting area on Plane 90°		0.002500 m2		Glare area at 76°		0.035154 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		05-09-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		977.18 lm	
LED Flux=1225lm LED Power=11W Eff=80% EfcLed=111lm/W EfcLum=89lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	33 60 82 69 100			D DIN 5040	B21		
F UTE	0.69 H + 0.31 T			B NBN	BZ 6		

Apertura a destra non trovata, gamma =8

Apertura a destra non trovata, gamma =8

Apertura a destra non trovata, gamma =8