

## Luminaire


Code 2116010A  
Name AoL SYSTEM S 45° SLAVE TERM. DX 3000K

## Measurement

Code FTS1902547  
Name AoL SYSTEM S 45° SLAVE TERM. DX 3000K

Luminaire Flux	964.32 lm	Luminaire Power	11.00 W	Efficacy	87.67 lm/W	Efficiency	100.00%
Sources Flux	964.32 lm	Maximum value	160.44 cd/klm	Position	C=0.00 G=8.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	590 mm	Width	50 mm	Height	50 mm
Rectangular Luminous Area		Length	590 mm	Width	50 mm	Height	50 mm
Horizontal Luminous Area		0.029500 m <sup>2</sup>		Emitting area on Plane 180°		0.029500 m <sup>2</sup>	
Emitting area on Plane 0°		0.029500 m <sup>2</sup>		Emitting area on Plane 270°		0.002500 m <sup>2</sup>	
Emitting area on Plane 90°		0.002500 m <sup>2</sup>		Glare area at 76°		0.035760 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		16-05-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		964.32 lm	
LED Flux=1225lm LED Power=11W Eff=79% EfcLed=111lm/W EfcLum=88lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	33 61 83 70 100			D DIN 5040	B21		
F UTE	0.70 H + 0.30 T			B NBN	BZ 6		


590mm x 50mm



Semipiani C

180.0 — 0.0  
270.0 — 90.0

ULOR 30.46 %  
DLOR 69.54 %  
RN 30.46 %

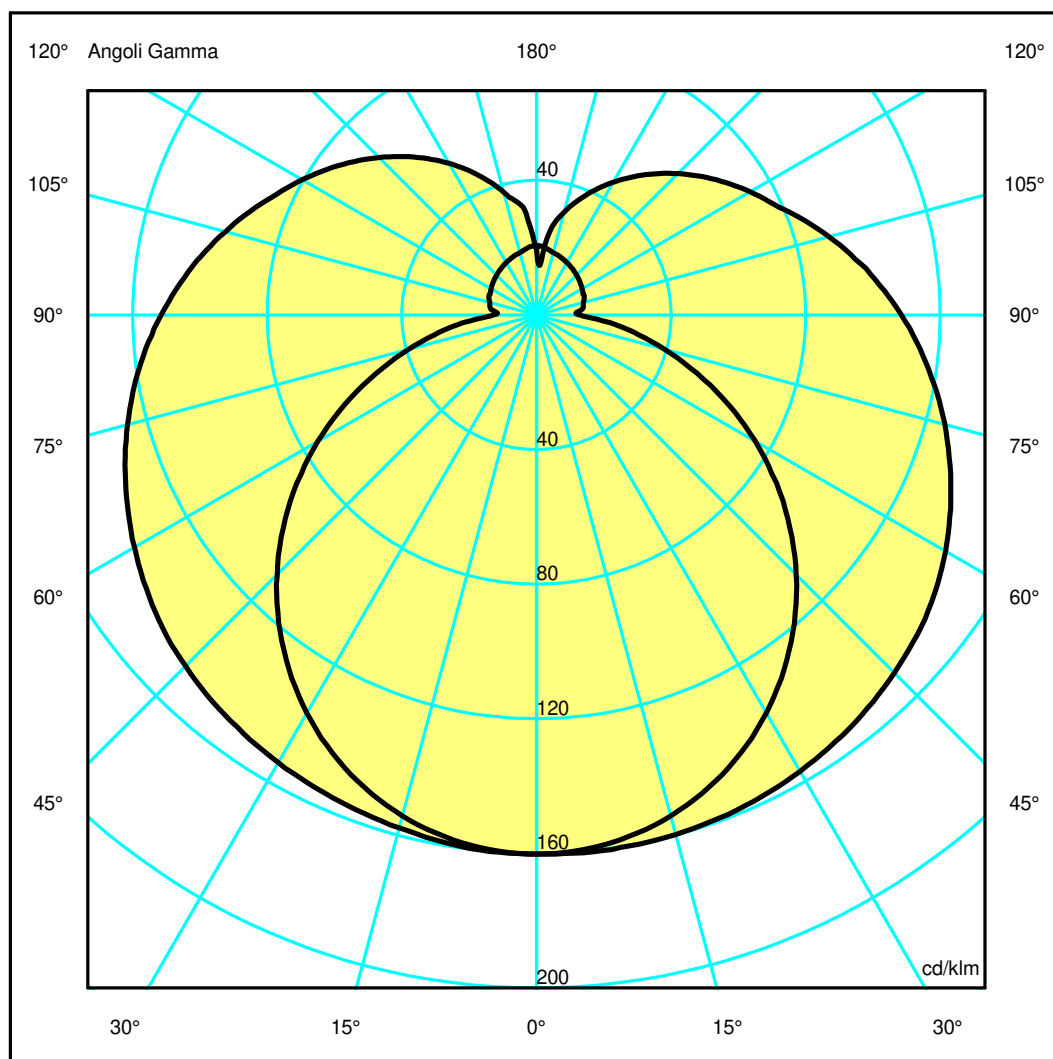

**Luminaire**

Code 2116010A  
 Name AoL SYSTEM S 45° SLAVE TERM. DX 3000K

**Measurem.**

Code FTS1902547  
 Name AoL SYSTEM S 45° SLAVE TERM. DX 3000K

Luminaire Flux	964.32 lm	Luminaire Power	11.00 W	Efficacy	87.67 lm/W	Efficiency	100.00%
Sources Flux	964.32 lm	Maximum value	160.44 cd/klm	Position	C=0.00 G=8.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	590 mm	Width	50 mm	Height	50 mm
Rectangular Luminous Area		Length	590 mm	Width	50 mm	Height	50 mm
Horizontal Luminous Area		0.029500 m2		Emitting area on Plane 180°		0.029500 m2	
Emitting area on Plane 0°		0.029500 m2		Emitting area on Plane 270°		0.002500 m2	
Emitting area on Plane 90°		0.002500 m2		Glare area at 76°		0.035760 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		16-05-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		964.32 lm	
LED Flux=1225lm LED Power=11W Eff=79% EfcLed=111lm/W EfcLum=88lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	33 61 83 70 100			D DIN 5040	B21		
F UTE	0.70 H + 0.30 T			B NBN	BZ 6		

Apertura a destra non trovata, gamma =8

Apertura a destra non trovata, gamma =8

Apertura a destra non trovata, gamma =8