

## Luminaire

Code 2168010A  
Name AoL SYSTEM SR 60° MAST.TERM.SX 3000K

## Measurerm.

Code FTS1902570  
Name AoL SYSTEM SR 60° MAST.TERM.SX 3000K

Luminaire Flux	690.61 lm	Luminaire Power	8.00 W	Efficacy	86.33 lm/W	Efficiency	100.00%
Sources Flux	690.61 lm	Maximum value	162.58 cd/klm	Position	C=20.00 G=5.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	475 mm	Width	50 mm	Height	50 mm
Rectangular Luminous Area		Length	475 mm	Width	50 mm	Height	50 mm
Horizontal Luminous Area		0.023750 m <sup>2</sup>		Emitting area on Plane 180°		0.023750 m <sup>2</sup>	
Emitting area on Plane 0°		0.023750 m <sup>2</sup>		Emitting area on Plane 270°		0.002500 m <sup>2</sup>	
Emitting area on Plane 90°		0.002500 m <sup>2</sup>		Glare area at 76°		0.028790 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		17-05-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		690.61 lm	


LED Flux=903lm LED Power=8W Eff=76% EfcLed=113lm/W EfcLum=86lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=50000h

C.I.E. 33 61 83 70 100  
F UTE 0.70 H + 0.30 T

D DIN 5040  
B NBN

B21  
BZ 6

475mm x 50mm




Semipiani C

180.0 — 0.0  
270.0 — 90.0

ULOR 30.45 %

DLOR 69.55 %

RN 30.45 %

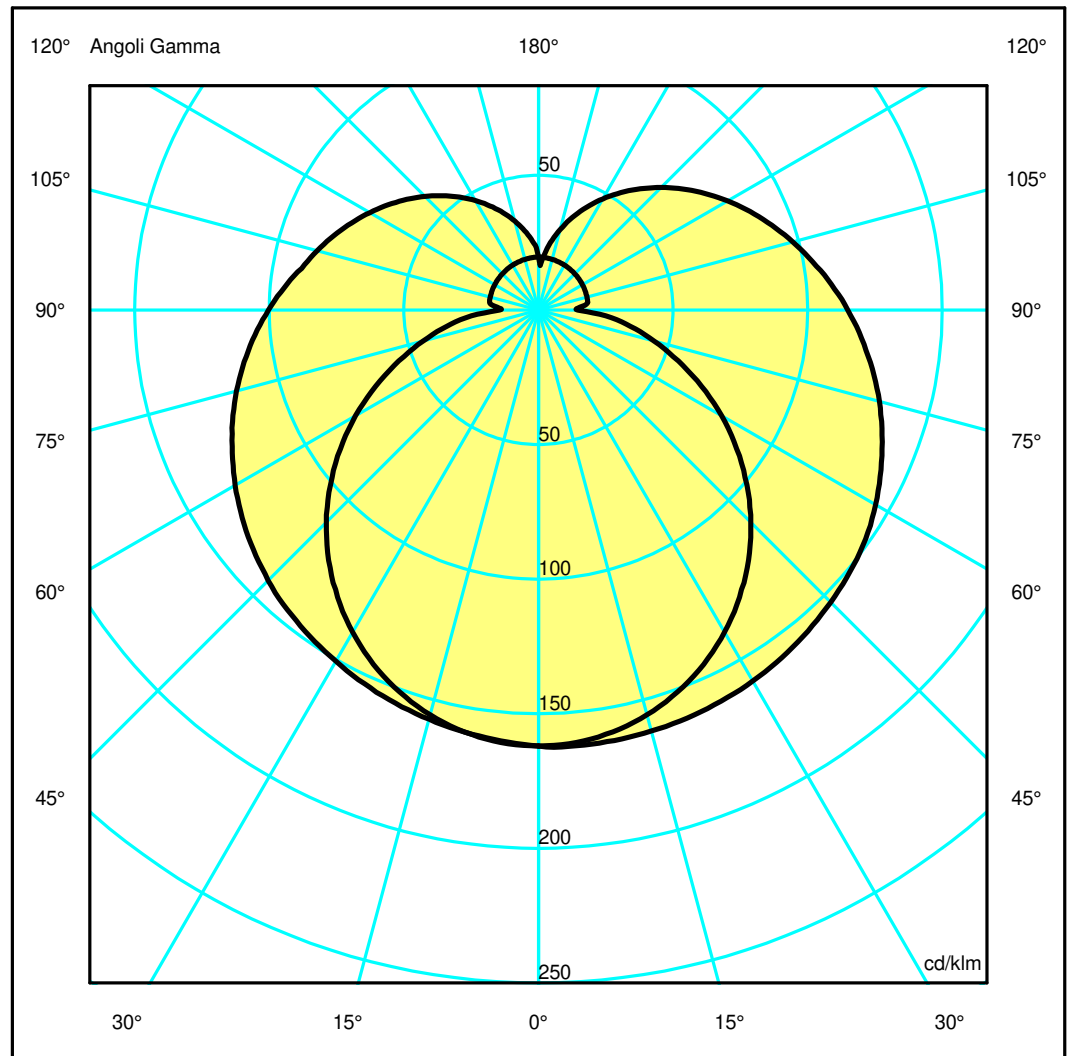

**Luminaire**

Code 2168010A  
 Name AoL SYSTEM SR 60° MAST.TERM.SX 3000K

**Measurem.**

Code FTS1902570  
 Name AoL SYSTEM SR 60° MAST.TERM.SX 3000K

Luminaire Flux	690.61 lm	Luminaire Power	8.00 W	Efficacy	86.33 lm/W	Efficiency	100.00%
Sources Flux	690.61 lm	Maximum value	162.58 cd/klm	Position	C=20.00 G=5.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	475 mm	Width	50 mm	Height	50 mm
Rectangular Luminous Area		Length	475 mm	Width	50 mm	Height	50 mm
Horizontal Luminous Area		0.023750 m2		Emitting area on Plane 180°		0.023750 m2	
Emitting area on Plane 0°		0.023750 m2		Emitting area on Plane 270°		0.002500 m2	
Emitting area on Plane 90°		0.002500 m2		Glare area at 76°		0.028790 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		17-05-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		690.61 lm	
LED Flux=903lm LED Power=8W Eff=76% EfcLed=113lm/W EfcLum=86lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	33 61 83 70 100			D DIN 5040	B21		
F UTE	0.70 H + 0.30 T			B NBN	BZ 6		

Apertura a destra non trovata, gamma =3

Apertura a destra non trovata, gamma =3

Apertura a destra non trovata, gamma =3