


Luminaire

Code M0677W81+M057600
 Name CATA SOFFITTO FISSO CATADIOPTIC STABLE WHITE UNITA' OTTICA 3000K DIMM DALI + OTTICA SPOT

Measurerm.

Code FTS1502709
 Name CATA SOFFITTO FISSO CATADIOPTIC STABLE WHITE UNITA' OTTICA 3000K DIMM DALI + OTTICA SPOT

Luminaire Flux	945.72 lm	Luminaire Power	30.00 W	Efficacy	31.52 lm/W	Efficiency	100.00%
Lamps Flux	945.72 lm	Maximum value	13099.85 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	130 mm 130 mm	Height Height	135 mm 70 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.013273 m2 0.009100 m2 0.009100 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.009100 m2 0.009100 m2 0.012041 m2	
Coordinate system Date Measurement Distance		CG 04-02-2015 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 945.72 lm	
LED Flux=2556lm LED Power=23W Eff=37% EfcLed=111lm/W EfcLum=32lm/W Ra=80 SDCM=3 L70(6K)=36000h							
C.I.E. F UTE	92 93 97 85 100 0.85 A + 0.15 T			D DIN 5040 B NBN		B61 BZ 1	

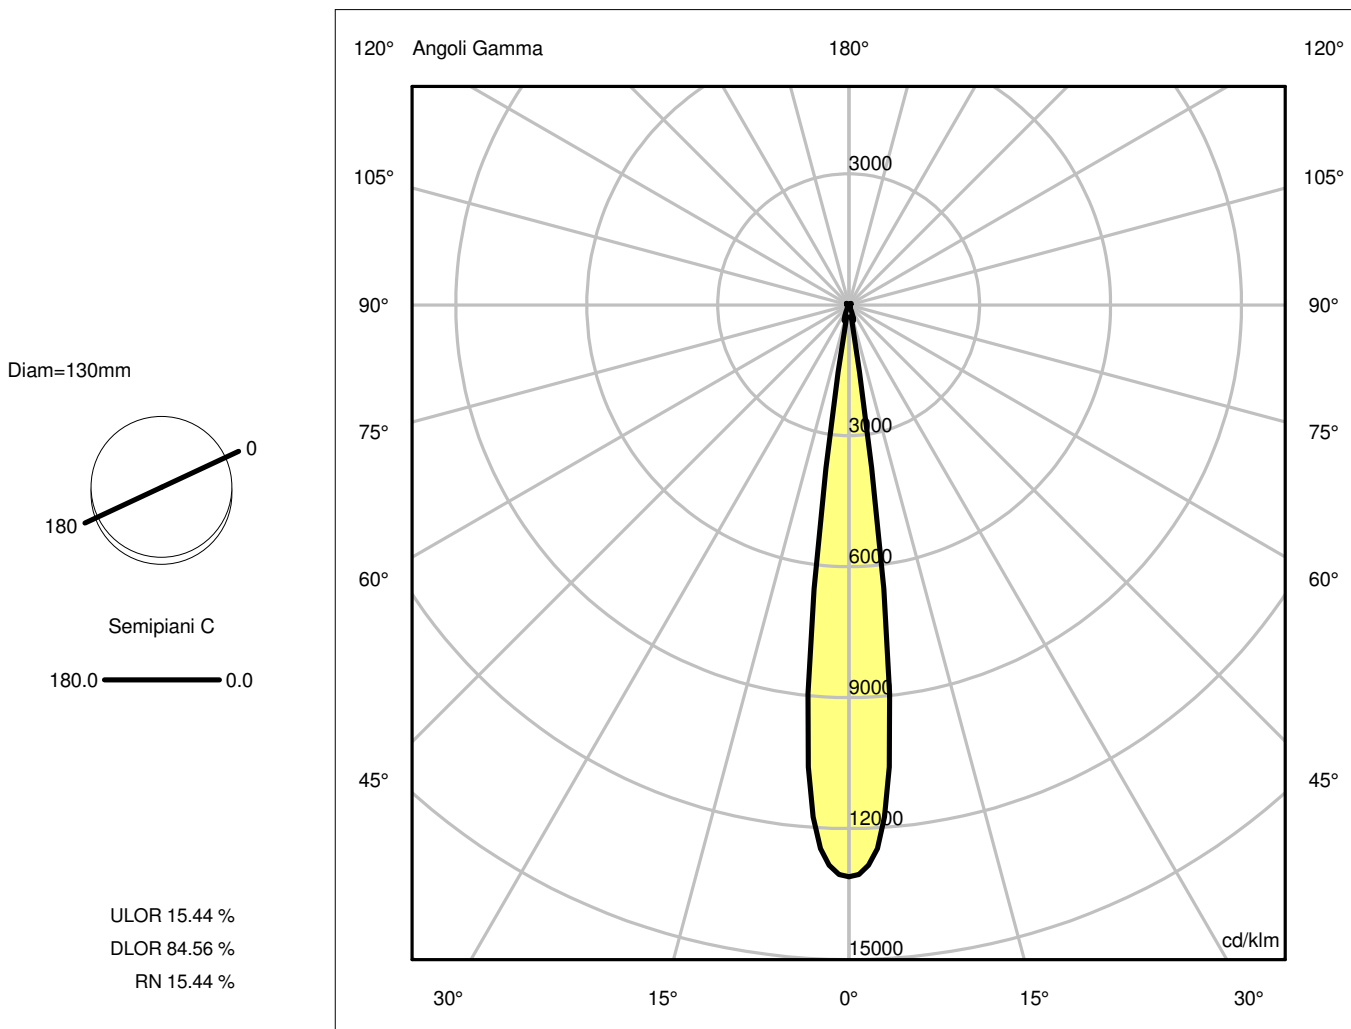

Luminaire

Code M0677W81+M057600

Name CATA SOFFITTO FISSO CATADIOPTIC STABLE WHITE UNITA' OTTICA 3000K DIMM DALI + OTTICA SPOT

Measurement

Code FTS1502709


Name CATA SOFFITTO FISSO CATADIOPTIC STABLE WHITE UNITA' OTTICA 3000K DIMM DALI + OTTICA SPOT

Luminaire Flux	945.72 lm	Luminaire Power	30.00 W	Efficacy	31.52 lm/W	Efficiency	100.00%
Lamps Flux	945.72 lm	Maximum value	13099.85 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	130 mm	Height	135 mm		
Round Luminous Area		Diam.	130 mm	Height	70 mm		
Horizontal Luminous Area		0.013273 m2		Emitting area on Plane 180°		0.009100 m2	
Emitting area on Plane 0°		0.009100 m2		Emitting area on Plane 270°		0.009100 m2	
Emitting area on Plane 90°		0.009100 m2		Glare area at 76°		0.012041 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		04-02-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		945.72 lm	
LED Flux=2556lm LED Power=23W Eff=37% EfcLed=111lm/W EfcLum=32lm/W Ra=80 SDCM=3 L70(6K)=36000h							
C.I.E.	92 93 97 85 100			D DIN 5040		B61	
F UTE	0.85 A + 0.15 T			B NBN		BZ 1	

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.12	0.25	0.37	0.49	0.61	OC	0.12	0.25	0.37	0.49	0.61
OB	0.12	0.25	0.37	0.49	0.61	OD	0.12	0.25	0.37	0.49	0.61

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	12388.79	10047.48	355.17	77.80	11.51	5.80	7.53	12.11	39.35	8.90
OB	12388.79	10047.48	355.17	77.80	11.51	5.80	7.53	12.11	39.35	8.90
OC	12388.79	10047.48	355.17	77.80	11.51	5.80	7.53	12.11	39.35	8.90
OD	12388.79	10047.48	355.17	77.80	11.51	5.80	7.53	12.11	39.35	8.90

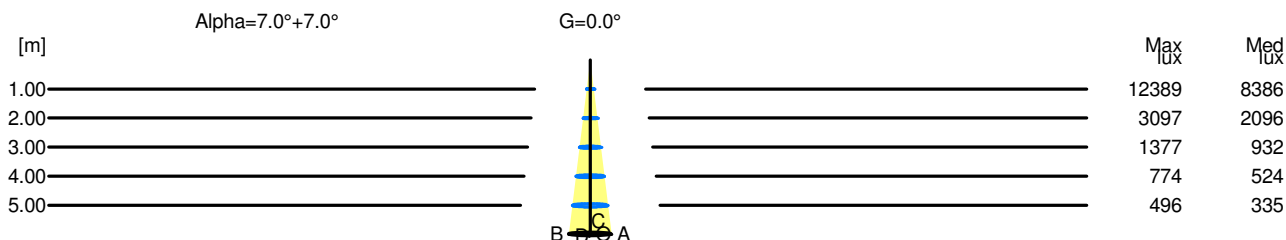

H[m]	D[m]	Max lux	Med lux	Alpha=7.0°+7.0°	G=0.0
1.00	0.25	12389	8386		
2.00	0.49	3097	2096		
3.00	0.74	1377	932		
4.00	0.98	774	524		
5.00	1.23	496	335		