

Luminaire

Code M0569N83+M109500+M281745


Name CATA TIR BINARIO STABLE WHITE UNITA' OTTICA 4000K DIMM DALI-SWITCHDIM + OTTICA ULTRA NARROW + FILTRO GIALLO

Measurem.

Code FTS1503451

Name CATA TIR BINARIO STABLE WHITE UNITA' OTTICA 4000K DIMM DALI-SWITCHDIM + OTTICA ULTRA NARROW + FILTRO GIALLO

Luminaire Flux	1096.60 lm	Luminaire Power	22.00 W	Efficacy	49.85 lm/W	Efficiency	100.00%
Lamps Flux	1096.60 lm	Maximum value	11431.36 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 130 mm Diam. 75 mm	Height	176 mm	Height	50 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.004418 m2 0.003750 m2 0.003750 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°			0.003750 m2 0.003750 m2 0.004707 m2		
Coordinate system	CG	Symmetry Type					Rotosymmetrical
Date	27-10-2015	Maximum Gamma Angle					180
Measurement Distance	0.00	Measurement Flux					1096.60 lm
LED Flux=1943,3lm LED Power=17,5W Eff=56% EfcLed=111lm/W EfcLum=50lm/W L70(6K)=36000h							
C.I.E.	87 95 98 100 100	D DIN 5040		A60			
F UTE	1.00 A	B NBN		BZ 1			

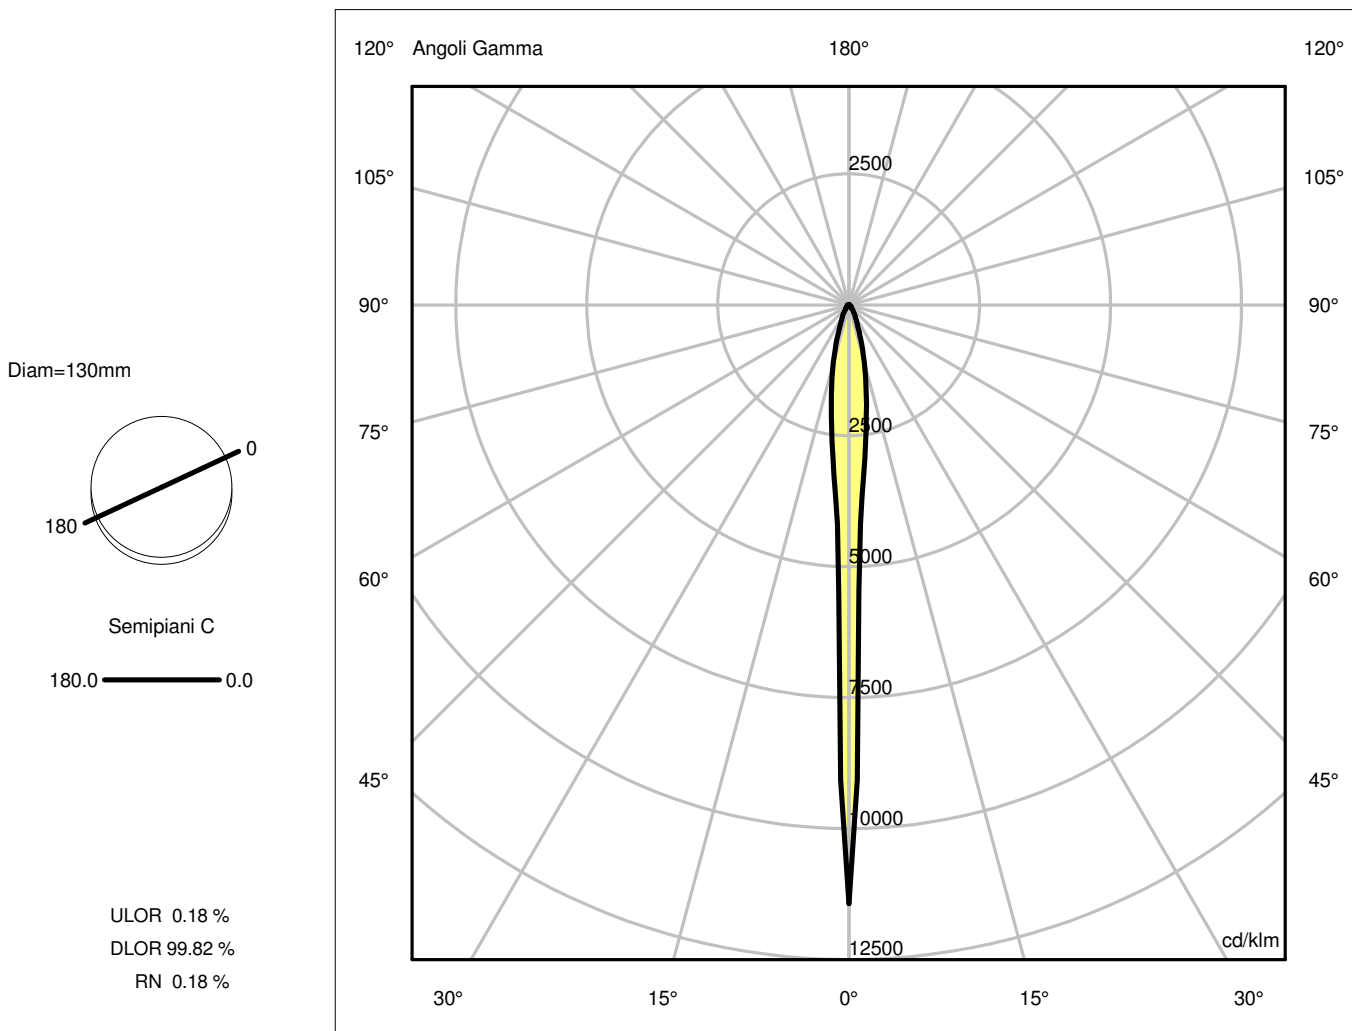

Luminaire

Code M0569N83+M109500+M281745

Name CATA TIR BINARIO STABLE WHITE UNITA' OTTICA 4000K DIMM DALI-SWITCHDIM + OTTICA ULTRA NARROW + FILTRO GIALLO

Measurement

Code FTS1503451


Name CATA TIR BINARIO STABLE WHITE UNITA' OTTICA 4000K DIMM DALI-SWITCHDIM + OTTICA ULTRA NARROW + FILTRO GIALLO

Luminaire Flux	1096.60 lm	Luminaire Power	22.00 W	Efficacy	49.85 lm/W	Efficiency	100.00%
Lamps Flux	1096.60 lm	Maximum value	11431.36 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	130 mm	Height	176 mm		
Round Luminous Area		Diam.	75 mm	Height	50 mm		
Horizontal Luminous Area		0.004418 m2		Emitting area on Plane 180°		0.003750 m2	
Emitting area on Plane 0°		0.003750 m2		Emitting area on Plane 270°		0.003750 m2	
Emitting area on Plane 90°		0.003750 m2		Glare area at 76°		0.004707 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		27-10-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1096.60 lm	
LED Flux=1943,3lm LED Power=17,5W Eff=56% EfcLed=111lm/W EfcLum=50lm/W L70(6K)=36000h							
C.I.E.	87 95 98 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.03	0.07	0.10	0.14	0.17	OC	0.03	0.07	0.10	0.14	0.17
OB	0.03	0.07	0.10	0.14	0.17	OD	0.03	0.07	0.10	0.14	0.17

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	12535.63	3571.91	1247.72	392.18	151.88	69.91	41.00	21.92	12.89	19.24
OB	12535.63	3571.91	1247.72	392.18	151.88	69.91	41.00	21.92	12.89	19.24
OC	12535.63	3571.91	1247.72	392.18	151.88	69.91	41.00	21.92	12.89	19.24
OD	12535.63	3571.91	1247.72	392.18	151.88	69.91	41.00	21.92	12.89	19.24

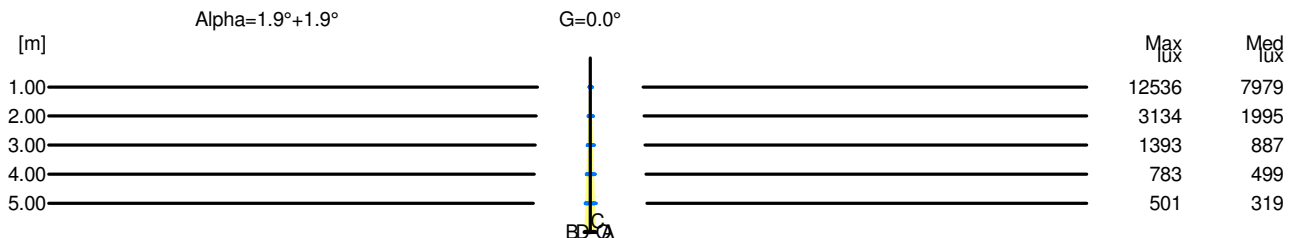

H[m]	D[m]	Max lux	Med lux	Alpha=1.9°+1.9°	G=0.0
1.00	0.07	12536	7979		
2.00	0.14	3134	1995		
3.00	0.20	1393	887		
4.00	0.27	783	499		
5.00	0.34	501	319		