


## Luminaire

Code M0569N81+M109600  
 Name CATA TIR SOFFITTO STABLE WHITE UNITA' OTTICA 4000K DIMM DALI-SWITCHDIM + OTTICA SPOT

## Measuram.

Code FTS1503275  
 Name CATA TIR SOFFITTO STABLE WHITE UNITA' OTTICA 4000K DIMM DALI-SWITCHDIM + OTTICA SPOT

Luminaire Flux	1757.52 lm	Luminaire Power	22.00 W	Efficacy	79.89 lm/W	Efficiency	100.00%
Lamps Flux	1757.52 lm	Maximum value	6853.41 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	130 mm 75 mm	Height Height	176 mm 50 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.004418 m2 0.003750 m2 0.003750 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.003750 m2 0.003750 m2 0.004707 m2	
Coordinate system Date Measurement Distance		CG 06-10-2015 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 1757.52 lm	
LED Flux=1943,3lm LED Power=17,5W Eff=90% EfcLed=111lm/W EfcLum=80lm/W Ra=90 SDCM=2 L70(6K)=36000h							
C.I.E. F UTE	93 98 99 100 100 1.00 A			D DIN 5040 B NBN	A60 BZ 1		

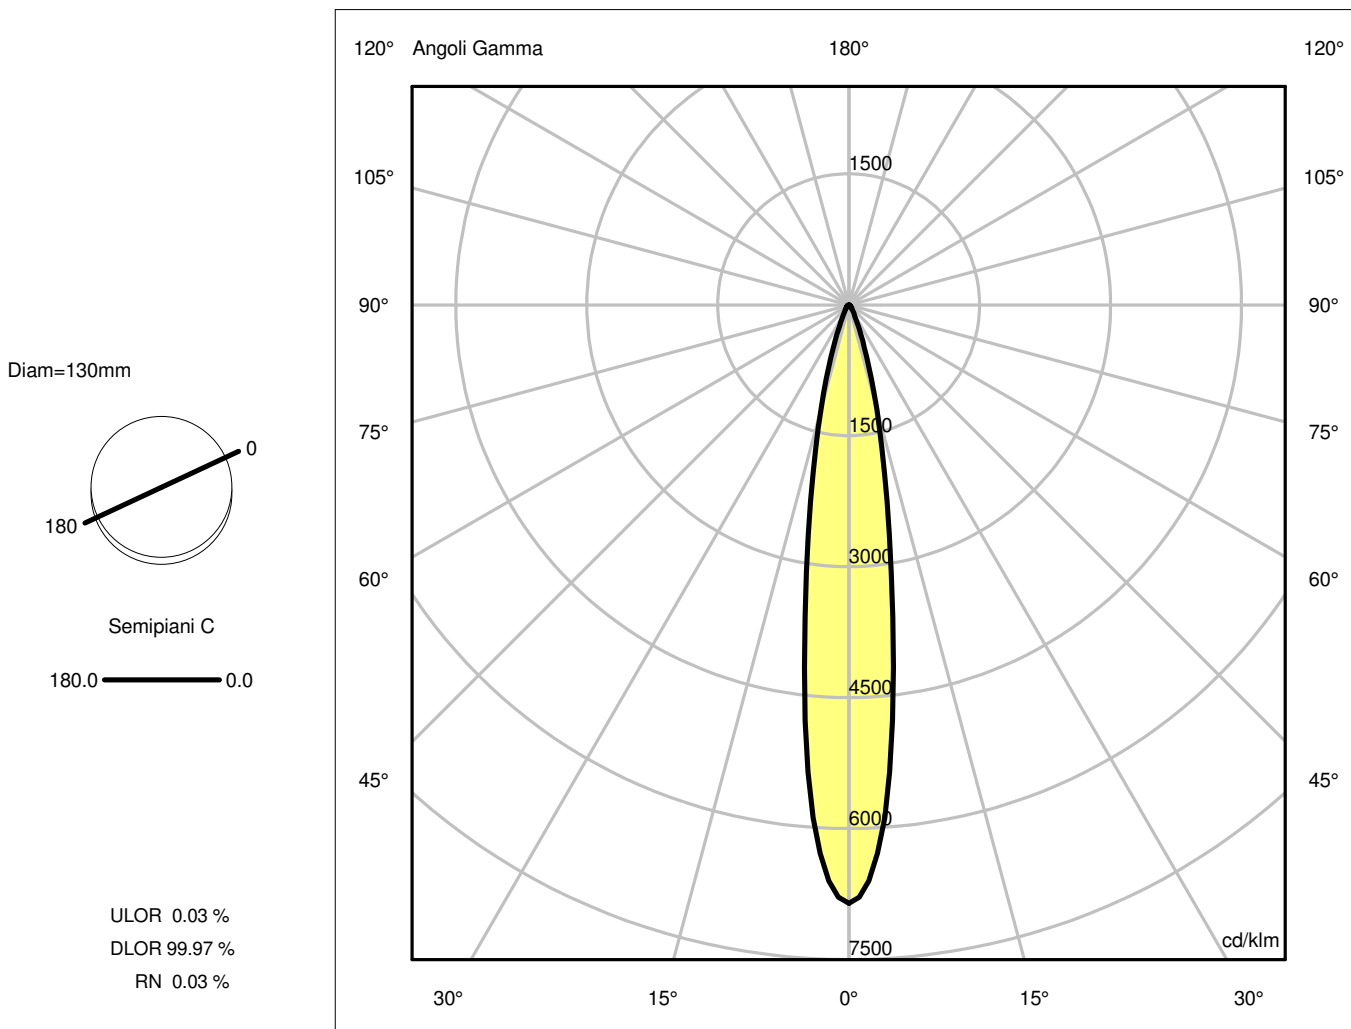

## Luminaire

Code M0569N81+M109600

Name CATA TIR SOFFITTO STABLE WHITE UNITA' OTTICA 4000K DIMM DALI-SWITCHDIM + OTTICA SPOT

## Measurement

Code FTS1503275


Name CATA TIR SOFFITTO STABLE WHITE UNITA' OTTICA 4000K DIMM DALI-SWITCHDIM + OTTICA SPOT

Luminaire Flux	1757.52 lm	Luminaire Power	22.00 W	Efficacy	79.89 lm/W	Efficiency	100.00%
Lamps Flux	1757.52 lm	Maximum value	6853.41 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	130 mm 75 mm	Height Height	176 mm 50 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.004418 m2 0.003750 m2 0.003750 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.003750 m2 0.003750 m2 0.004707 m2	
Coordinate system Date Measurement Distance		CG 06-10-2015 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 1757.52 lm	
LED Flux=1943,3lm LED Power=17,5W Eff=90% EfcLed=111lm/W EfcLum=80lm/W Ra=90 SDCM=2 L70(6K)=36000h							
C.I.E. F UTE	93 98 99 100 100 1.00 A			D DIN 5040 B NBN	A60 BZ 1		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.15	0.29	0.44	0.59	0.73	OC	0.15	0.29	0.44	0.59	0.73
OB	0.15	0.29	0.44	0.59	0.73	OD	0.15	0.29	0.44	0.59	0.73

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	12045.00	9442.42	2165.98	390.41	129.80	62.89	39.82	21.54	10.82	5.16
OB	12045.00	9442.42	2165.98	390.41	129.80	62.89	39.82	21.54	10.82	5.16
OC	12045.00	9442.42	2165.98	390.41	129.80	62.89	39.82	21.54	10.82	5.16
OD	12045.00	9442.42	2165.98	390.41	129.80	62.89	39.82	21.54	10.82	5.16

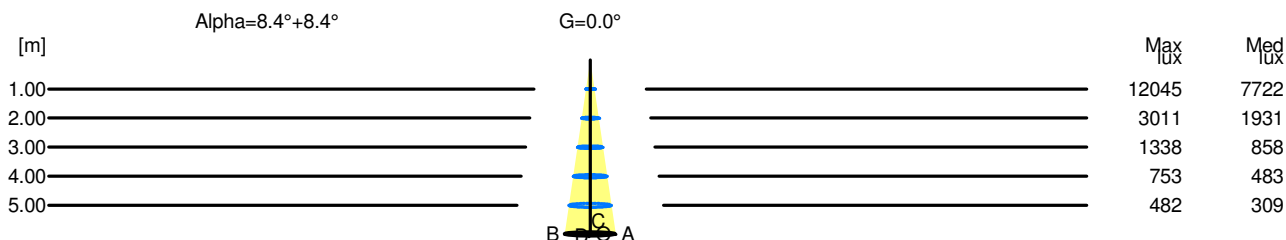

H[m]	D[m]	Max lux	Med lux	Alpha=8.4°+8.4°	G=0.0
1.00	0.29	12045	7722		
2.00	0.59	3011	1931		
3.00	0.88	1338	858		
4.00	1.18	753	483		
5.00	1.47	482	309		