


Luminaire

Code M0569W81+M109600+M281735
 Name CATA TIR SOFFITTO STABLE WHITE UNITA' OTTICA 3000K DIMM DALI-SWITCHDIM + OTTICA SPOT + FILTRO BLU

Measurerm.

Code FTS1503512
 Name CATA TIR SOFFITTO STABLE WHITE UNITA' OTTICA 3000K DIMM DALI-SWITCHDIM + OTTICA SPOT + FILTRO BLU

Luminaire Flux	228.61 lm	Luminaire Power	22.00 W	Efficacy	10.39 lm/W	Efficiency	100.00%
Lamps Flux	228.61 lm	Maximum value	4701.40 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	130 mm 75 mm	Height Height	176 mm 50 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.004418 m2 0.003750 m2 0.003750 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.003750 m2 0.003750 m2 0.004707 m2	
Coordinate system Date Measurement Distance		CG 09-10-2015 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 228.61 lm	
LED Flux=1811,5lm LED Power=17,5W Eff=13% EfcLed=104lm/W EfcLum=10lm/W L70(6K)=36000h							
C.I.E. F UTE	64 80 92 100 100 1.00 C			D DIN 5040 B NBN		A50 BZ 1 / 0.8 / BZ 2 / 1.5 / BZ 3 / 3 / BZ 4	

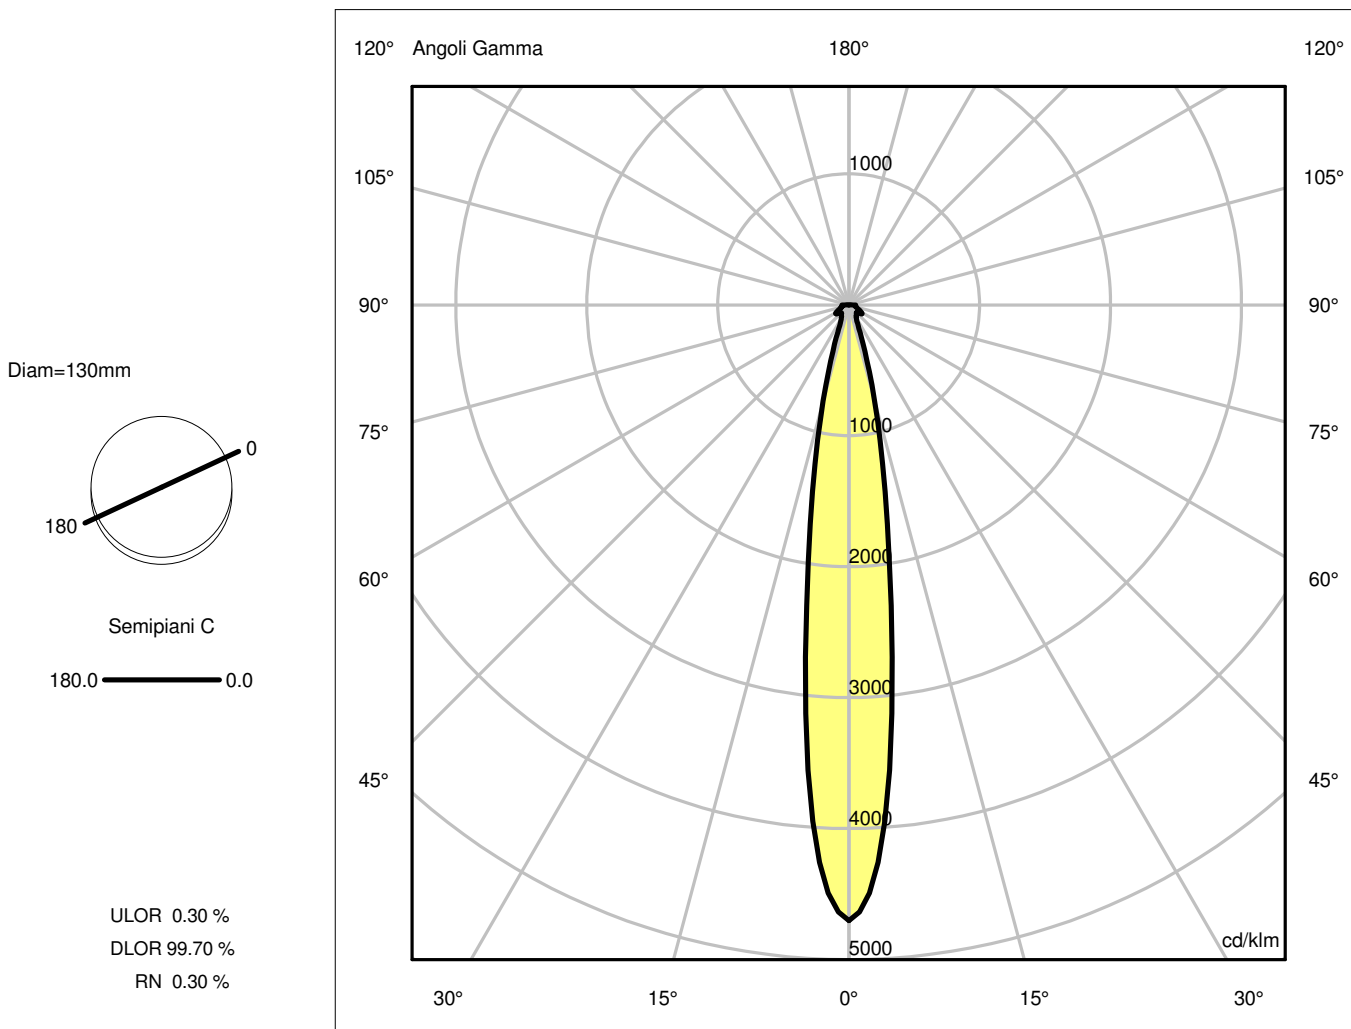

Luminaire

Code M0569W81+M109600+M281735
 Name CATA TIR SOFFITTO STABLE WHITE UNITA' OTTICA 3000K DIMM DALI-SWITCHDIM + OTTICA SPOT + FILTRO BLU

Measurement

Code FTS1503512
 Name CATA TIR SOFFITTO STABLE WHITE UNITA' OTTICA 3000K DIMM DALI-SWITCHDIM + OTTICA SPOT + FILTRO BLU


Luminaire Flux	228.61 lm	Luminaire Power	22.00 W	Efficacy	10.39 lm/W	Efficiency	100.00%
Lamps Flux	228.61 lm	Maximum value	4701.40 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	130 mm	Height	176 mm		
Round Luminous Area		Diam.	75 mm	Height	50 mm		
Horizontal Luminous Area	0.004418 m2			Emitting area on Plane 180°	0.003750 m2		
Emitting area on Plane 0°	0.003750 m2			Emitting area on Plane 270°	0.003750 m2		
Emitting area on Plane 90°	0.003750 m2			Glare area at 76°	0.004707 m2		
Coordinate system	CG	Symmetry Type		Maximum Gamma Angle	180		Rotosymmetrical
Date	09-10-2015	Measurement Flux			228.61 lm		
Measurement Distance	0.00						
LED Flux=1811,5lm LED Power=17,5W Eff=13% EfcLed=104lm/W EfcLum=10lm/W L70(6K)=36000h							
C.I.E.	64 80 92 100 100	D DIN 5040		A50			
F UTE	1.00 C	B NBN		BZ 1 / 0.8 / BZ 2 / 1.5 / BZ 3 / 3 / BZ 4			

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.14	0.28	0.42	0.56	0.70	OC	0.14	0.28	0.42	0.56	0.70
OB	0.14	0.28	0.42	0.56	0.70	OD	0.14	0.28	0.42	0.56	0.70

Luminous Intensities [cd/klm]

	0	5	15	25	35	45	55	65	75	85
OA	1074.79	815.24	173.58	35.72	22.67	19.06	27.35	18.43	12.65	11.94
OB	1074.79	815.24	173.58	35.72	22.67	19.06	27.35	18.43	12.65	11.94
OC	1074.79	815.24	173.58	35.72	22.67	19.06	27.35	18.43	12.65	11.94
OD	1074.79	815.24	173.58	35.72	22.67	19.06	27.35	18.43	12.65	11.94

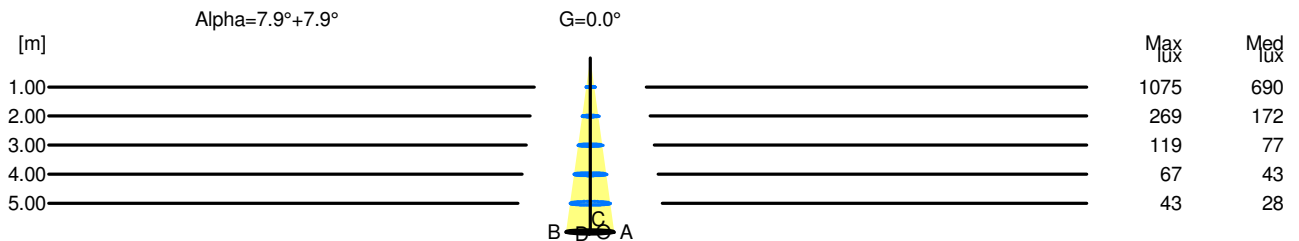

H[m]	D[m]	Max lux	Med lux	Alpha=7.9°+7.9°	G=0.0
1.00	0.28	1075	690		
2.00	0.56	269	172		
3.00	0.83	119	77		
4.00	1.11	67	43		
5.00	1.39	43	28		