

Luminaire

Code M0671W81+M109700+M281755


Name CATA TIR SOSPENSIONE STABLE WHITE UNITA' OTTICA 3000K DIMM DALI-SWITCHDIM + OTTICA FLOOD + FILTRO ROSSO

Measurem.

Code FTS1503497

Name CATA TIR SOSPENSIONE STABLE WHITE UNITA' OTTICA 3000K DIMM DALI-SWITCHDIM + OTTICA FLOOD + FILTRO ROSSO

Luminaire Flux	371.48 lm	Luminaire Power	22.00 W	Efficacy	16.89 lm/W	Efficiency	100.00%
Lamps Flux	371.48 lm	Maximum value	1092.21 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 130 mm Diam. 75 mm	Height	176 mm	Height	50 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.004418 m2 0.003750 m2 0.003750 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°				0.003750 m2 0.003750 m2 0.004707 m2	
Coordinate system	CG	Symmetry Type				Rotosymmetrical	
Date	09-10-2015	Maximum Gamma Angle				180	
Measurement Distance	0.00	Measurement Flux				371.48 lm	
LED Flux=1811,5lm LED Power=17,5W Eff=21% EfcLed=104lm/W EfcLum=17lm/W L70(6K)=36000h							
C.I.E.	65 87 96 100 100	D DIN 5040		A50			
F UTE	1.00 C	B NBN		BZ 2 / 1.5 / BZ 3			

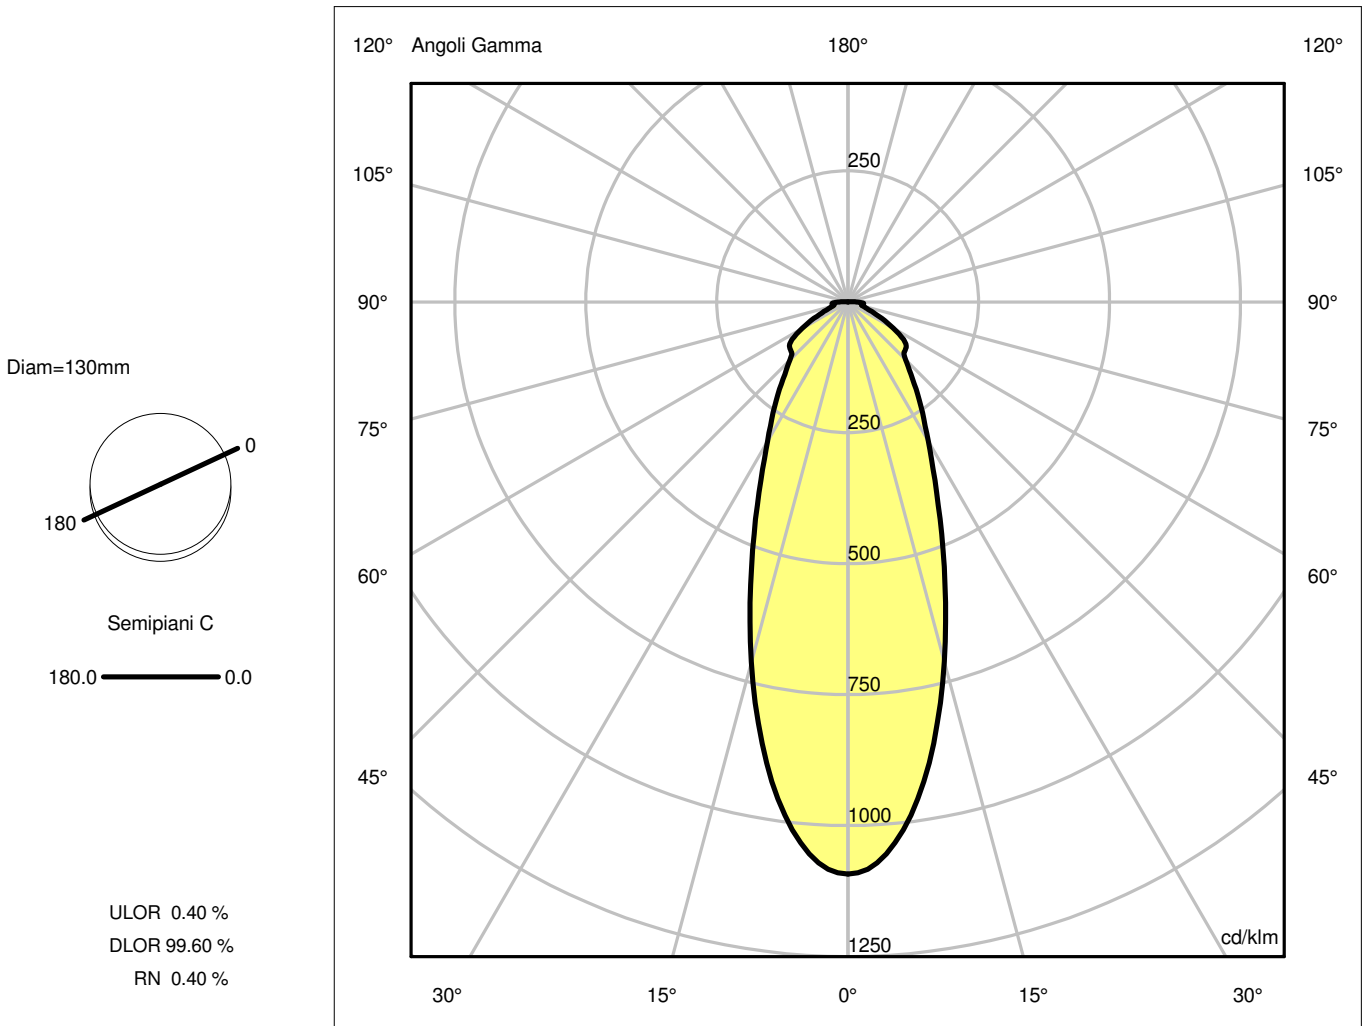

Luminaire

Code M0671W81+M109700+M281755

Name CATA TIR SOSPENSIONE STABLE WHITE UNITA' OTTICA 3000K DIMM DALI-SWITCHDIM + OTTICA FLOOD + FILTRO ROSSO

Measurement

Code FTS1503497


Name CATA TIR SOSPENSIONE STABLE WHITE UNITA' OTTICA 3000K DIMM DALI-SWITCHDIM + OTTICA FLOOD + FILTRO ROSSO

Luminaire Flux	371.48 lm	Luminaire Power	22.00 W	Efficacy	16.89 lm/W	Efficiency	100.00%
Lamps Flux	371.48 lm	Maximum value	1092.21 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	130 mm	Height	176 mm		
Round Luminous Area		Diam.	75 mm	Height	50 mm		
Horizontal Luminous Area	0.004418 m2			Emitting area on Plane 180°	0.003750 m2		
Emitting area on Plane 0°	0.003750 m2			Emitting area on Plane 270°	0.003750 m2		
Emitting area on Plane 90°	0.003750 m2			Glare area at 76°	0.004707 m2		
Coordinate system	CG	Symmetry Type		Maximum Gamma Angle	180		Rotosymmetrical
Date	09-10-2015	Measurement Flux			371.48 lm		
Measurement Distance	0.00						
LED Flux=1811,5lm LED Power=17,5W Eff=21% EfcLed=104lm/W EfcLum=17lm/W L70(6K)=36000h							
C.I.E.	65 87 96 100 100	D DIN 5040		A50			
F UTE	1.00 C	B NBN		BZ 2 / 1.5 / BZ 3			

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.36	0.72	1.08	1.44	1.79	OC	0.36	0.72	1.08	1.44	1.79
OB	0.36	0.72	1.08	1.44	1.79	OD	0.36	0.72	1.08	1.44	1.79

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	405.74	385.06	264.24	149.06	90.49	57.98	49.52	24.32	10.91	11.17
OB	405.74	385.06	264.24	149.06	90.49	57.98	49.52	24.32	10.91	11.17
OC	405.74	385.06	264.24	149.06	90.49	57.98	49.52	24.32	10.91	11.17
OD	405.74	385.06	264.24	149.06	90.49	57.98	49.52	24.32	10.91	11.17

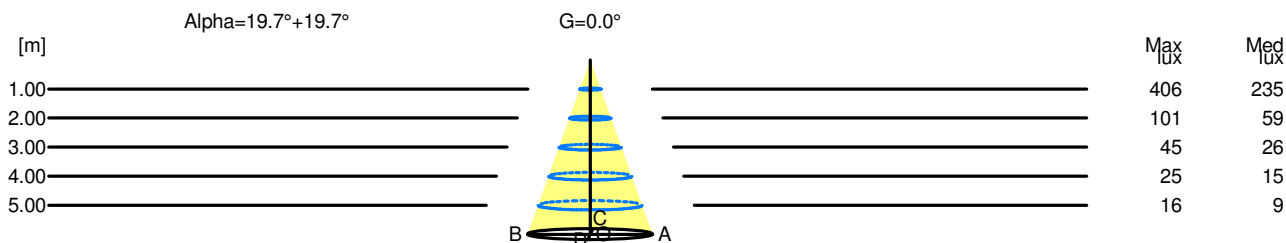

H[m]	D[m]	Max lux	Med lux	Alpha=19.7°+19.7°	G=0.0
1.00	0.72	406	235		
2.00	1.44	101	59		
3.00	2.15	45	26		
4.00	2.87	25	15		
5.00	3.59	16	9		