


## Luminaire

Code M0671W81+M109700  
 Name CATA TIR SOSPENSIONE STABLE WHITE UNITA' OTTICA 3000K DIMM DALI + OTTICA FLOOD

## Measurem.

Code FTS1503334  
 Name CATA TIR SOSPENSIONE STABLE WHITE UNITA' OTTICA 3000K DIMM DALI + OTTICA FLOOD

Luminaire Flux	1560.84 lm	Luminaire Power	22.00 W	Efficacy	70.95 lm/W	Efficiency	100.00%
Lamps Flux	1560.84 lm	Maximum value	2823.83 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	130 mm 75 mm	Height Height	176 mm 50 mm		
Horizontal Luminous Area	0.004418 m2			Emitting area on Plane 180°	0.003750 m2		
Emitting area on Plane 0°	0.003750 m2			Emitting area on Plane 270°	0.003750 m2		
Emitting area on Plane 90°	0.003750 m2			Glare area at 76°	0.004707 m2		
Coordinate system	CG			Symmetry Type	Rotosymmetrical		
Date	07-10-2015			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	1560.84 lm		
LED Flux=1811,5lm LED Power=17,5W Eff=86% EfcLed=104lm/W EfcLum=71lm/W Ra=90 SDCM=2 L70(6K)=36000h							
C.I.E.	90 96 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

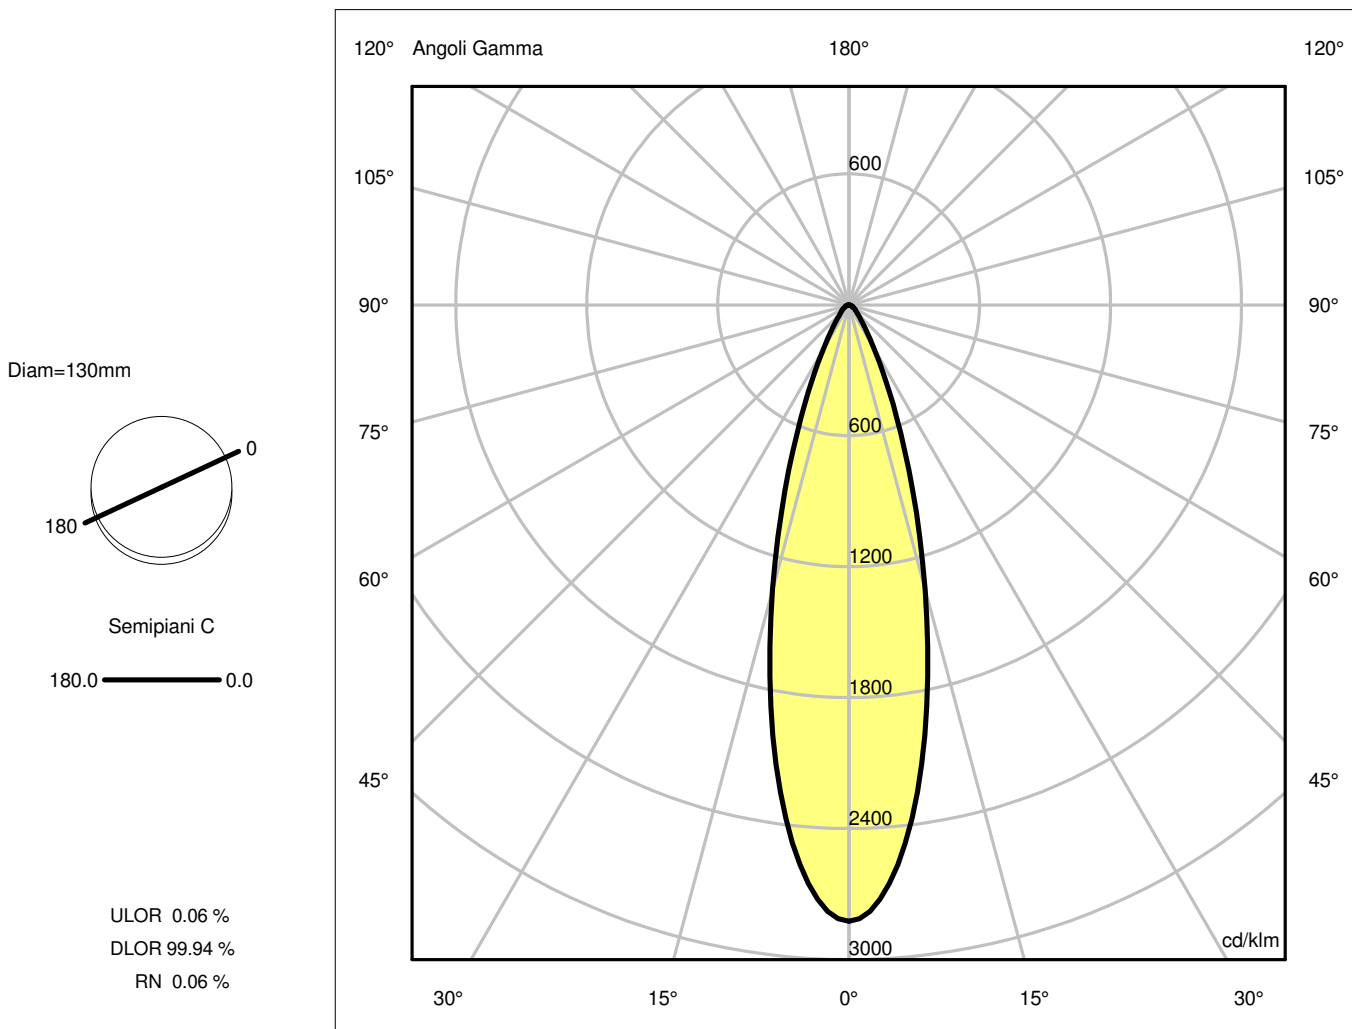

## Luminaire

Code M0671W81+M109700  
 Name CATA TIR SOSPENSIONE STABLE WHITE UNITA' OTTICA 3000K DIMM DALI + OTTICA FLOOD

## Measurement


Code FTS1503334  
 Name CATA TIR SOSPENSIONE STABLE WHITE UNITA' OTTICA 3000K DIMM DALI + OTTICA FLOOD

Luminaire Flux	1560.84 lm	Luminaire Power	22.00 W	Efficacy	70.95 lm/W	Efficiency	100.00%
Lamps Flux	1560.84 lm	Maximum value	2823.83 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	130 mm 75 mm	Height Height	176 mm 50 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.004418 m2 0.003750 m2 0.003750 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.003750 m2 0.003750 m2 0.004707 m2	
Coordinate system Date Measurement Distance		CG 07-10-2015 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 1560.84 lm	
LED Flux=1811,5lm LED Power=17,5W Eff=86% EfcLed=104lm/W EfcLum=71lm/W Ra=90 SDCM=2 L70(6K)=36000h							
C.I.E. F UTE	90 96 99 100 100 1.00 A			D DIN 5040 B NBN	A60 BZ 1		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.26	0.52	0.78	1.04	1.29	OC	0.26	0.52	0.78	1.04	1.29
OB	0.26	0.52	0.78	1.04	1.29	OD	0.26	0.52	0.78	1.04	1.29

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	4407.55	4017.20	2107.26	685.91	204.65	86.26	50.87	29.13	16.24	8.32
OB	4407.55	4017.20	2107.26	685.91	204.65	86.26	50.87	29.13	16.24	8.32
OC	4407.55	4017.20	2107.26	685.91	204.65	86.26	50.87	29.13	16.24	8.32
OD	4407.55	4017.20	2107.26	685.91	204.65	86.26	50.87	29.13	16.24	8.32

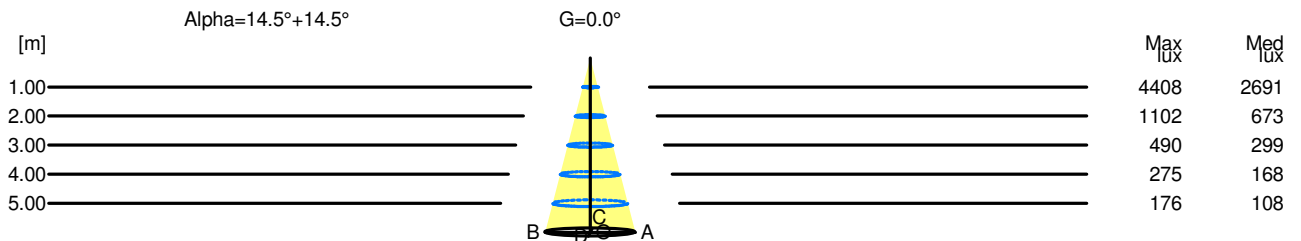

H[m]	D[m]	Max lux	Med lux	Alpha=14.5°+14.5°	G=0.0
1.00	0.52	4408	2691		
2.00	1.04	1102	673		
3.00	1.55	490	299		
4.00	2.07	275	168		
5.00	2.59	176	108		