


## Luminaire

Code M0569N81+M109600+M281755  
 Name CATA TIR SOFFITTO STABLE WHITE UNITA' OTTICA 4000K DIMM DALI-SWITCHDIM + OTTICA SPOT + FILTRO ROSSO

## Measur.

Code FTS1503476  
 Name CATA TIR SOFFITTO STABLE WHITE UNITA' OTTICA 4000K DIMM DALI-SWITCHDIM + OTTICA SPOT + FILTRO ROSSO

Luminaire Flux	398.08 lm	Luminaire Power	22.00 W	Efficacy	18.09 lm/W	Efficiency	100.00%
Lamps Flux	398.08 lm	Maximum value	3261.34 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	130 mm 75 mm	Height Height	175 mm 50 mm		
Horizontal Luminous Area	0.004418 m2			Emitting area on Plane 180°		0.003750 m2	
Emitting area on Plane 0°	0.003750 m2			Emitting area on Plane 270°		0.003750 m2	
Emitting area on Plane 90°	0.003750 m2			Glare area at 76°		0.004707 m2	
Coordinate system	CG			Symmetry Type		Rotosymmetrical	
Date	09-10-2015			Maximum Gamma Angle		90	
Measurement Distance	0.00			Measurement Flux		398.08 lm	
LED Flux=1943,3lm LED Power=17,5W Eff=20% EfcLed=111lm/W EfcLum=18lm/W L70(6K)=36000h							
C.I.E.	69 88 96 100 100			D DIN 5040		A50	
F UTE	1.00 C			B NBN		BZ 1 / 1 / BZ 2 / 4 / BZ 3	

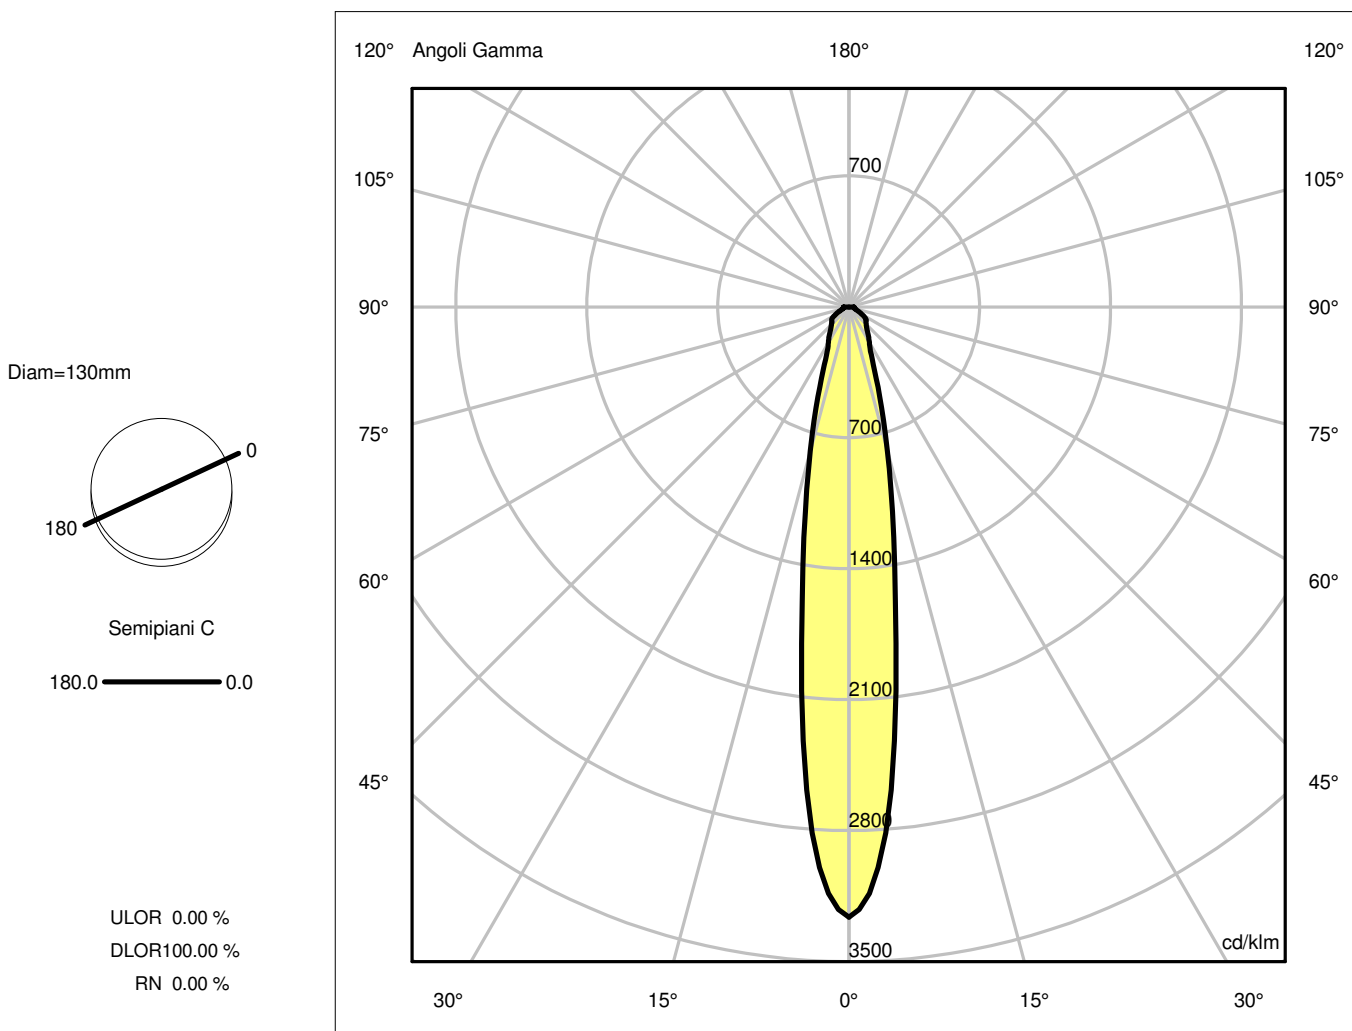

## Luminaire

Code M0569N81+M109600+M281755  
 Name CATA TIR SOFFITTO STABLE WHITE UNITA' OTTICA 4000K DIMM DALI-SWITCHDIM + OTTICA SPOT + FILTRO ROSSO

## Measurerm.


Code FTS1503476  
 Name CATA TIR SOFFITTO STABLE WHITE UNITA' OTTICA 4000K DIMM DALI-SWITCHDIM + OTTICA SPOT + FILTRO ROSSO

Luminaire Flux	398.08 lm	Luminaire Power	22.00 W	Efficacy	18.09 lm/W	Efficiency	100.00%
Lamps Flux	398.08 lm	Maximum value	3261.34 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	130 mm 75 mm	Height Height	175 mm 50 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.004418 m2 0.003750 m2 0.003750 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.003750 m2 0.003750 m2 0.004707 m2	
Coordinate system Date Measurement Distance		CG 09-10-2015 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 90 398.08 lm	
LED Flux=1943,3lm LED Power=17,5W Eff=20% EfcLed=111lm/W EfcLum=18lm/W L70(6K)=36000h							
C.I.E. F UTE	69 88 96 100 100 1.00 C			D DIN 5040 B NBN	A50 BZ 1 / 1 / BZ 2 / 4 / BZ 3		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.16	0.31	0.47	0.62	0.78	OC	0.16	0.31	0.47	0.62	0.78
OB	0.16	0.31	0.47	0.62	0.78	OD	0.16	0.31	0.47	0.62	0.78

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1298.27	1032.22	317.74	112.70	72.22	52.52	43.73	22.59	12.80	10.72
OB	1298.27	1032.22	317.74	112.70	72.22	52.52	43.73	22.59	12.80	10.72
OC	1298.27	1032.22	317.74	112.70	72.22	52.52	43.73	22.59	12.80	10.72
OD	1298.27	1032.22	317.74	112.70	72.22	52.52	43.73	22.59	12.80	10.72

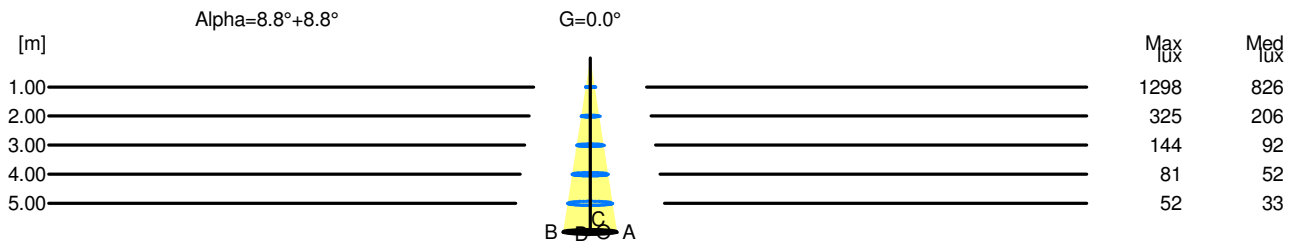

H[m]	D[m]	Max lux	Med lux	Alpha=8.8°+8.8°	G=0.0
1.00	0.31	1298	826		
2.00	0.62	325	206		
3.00	0.93	144	92		
4.00	1.24	81	52		
5.00	1.56	52	33		