


Luminaire

Code M0569N81+M109600+M281745
 Name CATA TIR SOFFITTO STABLE WHITE UNITA' OTTICA 4000K DIMM DALI-SWITCHDIM + OTTICA SPOT + FILTRO GIALLO

Measurem.

Code FTS1503444
 Name CATA TIR SOFFITTO STABLE WHITE UNITA' OTTICA 4000K DIMM DALI-SWITCHDIM + OTTICA SPOT + FILTRO GIALLO

Luminaire Flux	1370.38 lm	Luminaire Power	22.00 W	Efficacy	62.29 lm/W	Efficiency	100.00%
Lamps Flux	1370.38 lm	Maximum value	6446.43 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	130 mm 75 mm	Height Height	176 mm 50 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.004418 m2 0.003750 m2 0.003750 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.003750 m2 0.003750 m2 0.004707 m2	
Coordinate system Date Measurement Distance		CG 09-10-2015 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Double Symmetrical 180 1370.38 lm	
LED Flux=1943,3lm LED Power=17,5W Eff=71% EfcLed=111lm/W EfcLum=62lm/W L70(6K)=36000h							
C.I.E. F UTE	94 98 99 100 100 1.00 A			D DIN 5040 B NBN	A60 BZ 1		

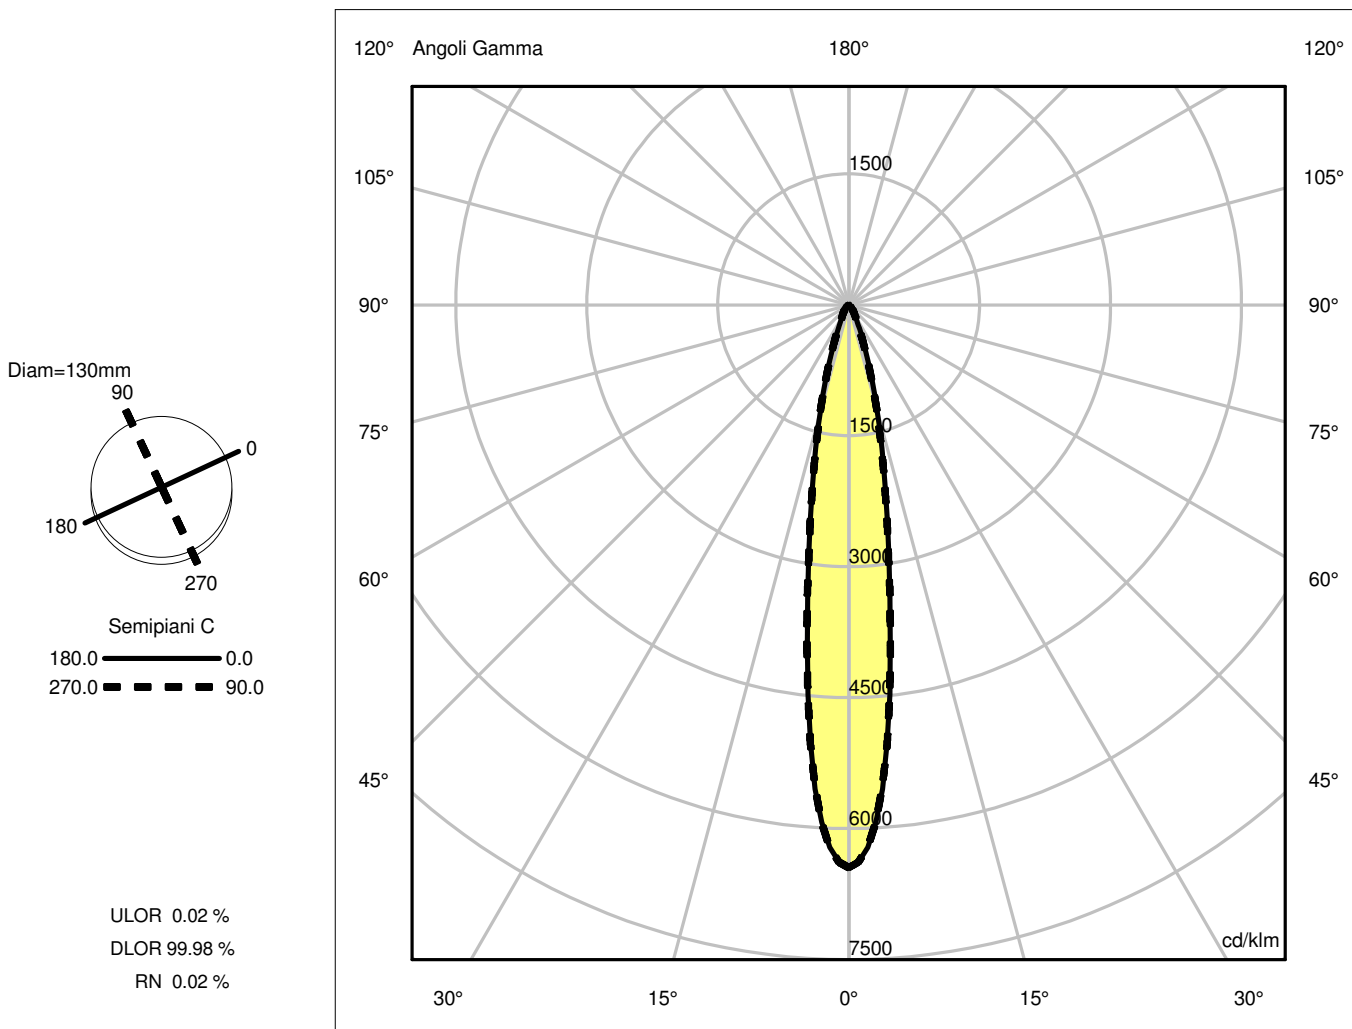

Luminaire

Code M0569N81+M109600+M281745
 Name CATA TIR SOFFITTO STABLE WHITE UNITA' OTTICA 4000K DIMM DALI-SWITCHDIM + OTTICA SPOT + FILTRO GIALLO

Measurerm.


Code FTS1503444
 Name CATA TIR SOFFITTO STABLE WHITE UNITA' OTTICA 4000K DIMM DALI-SWITCHDIM + OTTICA SPOT + FILTRO GIALLO

Luminaire Flux	1370.38 lm	Luminaire Power	22.00 W	Efficacy	62.29 lm/W	Efficiency	100.00%
Lamps Flux	1370.38 lm	Maximum value	6446.43 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Round Luminaire		Diam.	130 mm	Height	176 mm		
Round Luminous Area		Diam.	75 mm	Height	50 mm		
Horizontal Luminous Area	0.004418 m2			Emitting area on Plane 180°	0.003750 m2		
Emitting area on Plane 0°	0.003750 m2			Emitting area on Plane 270°	0.003750 m2		
Emitting area on Plane 90°	0.003750 m2			Glare area at 76°	0.004707 m2		
Coordinate system	CG	Symmetry Type		Maximum Gamma Angle	180		Double Symmetrical
Date	09-10-2015	Measurement Flux			1370.38 lm		
Measurement Distance	0.00						
LED Flux=1943,3lm LED Power=17,5W Eff=71% EfcLed=111lm/W EfcLum=62lm/W L70(6K)=36000h							
C.I.E.	94 98 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.15	0.29	0.44	0.59	0.74	OC	0.15	0.29	0.44	0.59	0.74
OB	0.15	0.29	0.44	0.59	0.74	OD	0.15	0.29	0.44	0.59	0.74

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	8834.06	6909.44	1722.07	352.42	125.13	57.92	31.54	13.68	7.33	6.01
OB	8834.06	6909.44	1722.07	352.42	125.13	57.92	31.54	13.68	7.33	6.01
OC	8834.06	6916.10	1694.49	339.92	124.54	56.67	30.30	11.99	5.68	4.90
OD	8834.06	6916.10	1694.49	339.92	124.54	56.67	30.30	11.99	5.68	4.90

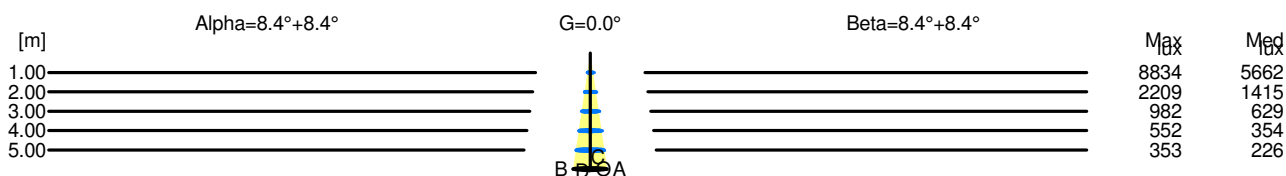

H[m]	D[m]	Max lux	Med lux	Alpha=8.4°+8.4°	G=0.0
1.00	0.29	8834	5662		
2.00	0.59	2209	1415		
3.00	0.88	982	629		
4.00	1.18	552	354		
5.00	1.47	353	226		

H[m]	D[m]	Max lux	Med lux	Beta=8.4°+8.4°	G=0.0
1.00	0.29	8834	5662		
2.00	0.59	2209	1415		
3.00	0.88	982	629		
4.00	1.18	552	354		
5.00	1.47	353	226		