

Luminaire

Code T081200
Name CICLOPE parete 6W 3000K grigio bianco

Measur.

Code FDS0000970
Name CICLOPE parete 6W 3000K grigio bianco

Luminaire Flux	382.72 lm	Luminaire Power	6.50 W	Efficacy	58.88 lm/W	Efficiency	100.00%
Lamps Flux	382.72 lm	Maximum value	504.75 cd/klm	Position	C=180.00 G=61.00	CG	Sym. on planes 0-180
Rectangular Luminaire Round Luminous Area		Length Diam.	165 mm 100 mm	Width Height	50 mm 0 mm	Height	265 mm
Horizontal Luminous Area		0.007854 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001900 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		14-06-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		382.72 lm	


LED Flux=595,3lm LED Power=5W Eff=64% EfcLed=119lm/W EfcLum=59lm/W CCT=3000K Ra=90 SDCM=2 L90(20K)=118000h

C.I.E. 25 53 79 82 100
F UTE 0.82 J + 0.18 T

D DIN 5040
B NBN

B11
BZ 8 / 2 / BZ 7


165mm x 50mm



Semipiani C

180.0 ——— 0.0
270.0 - - - - 90.0

ULOR 18.41 %
DLOR 81.59 %
RN 18.41 %

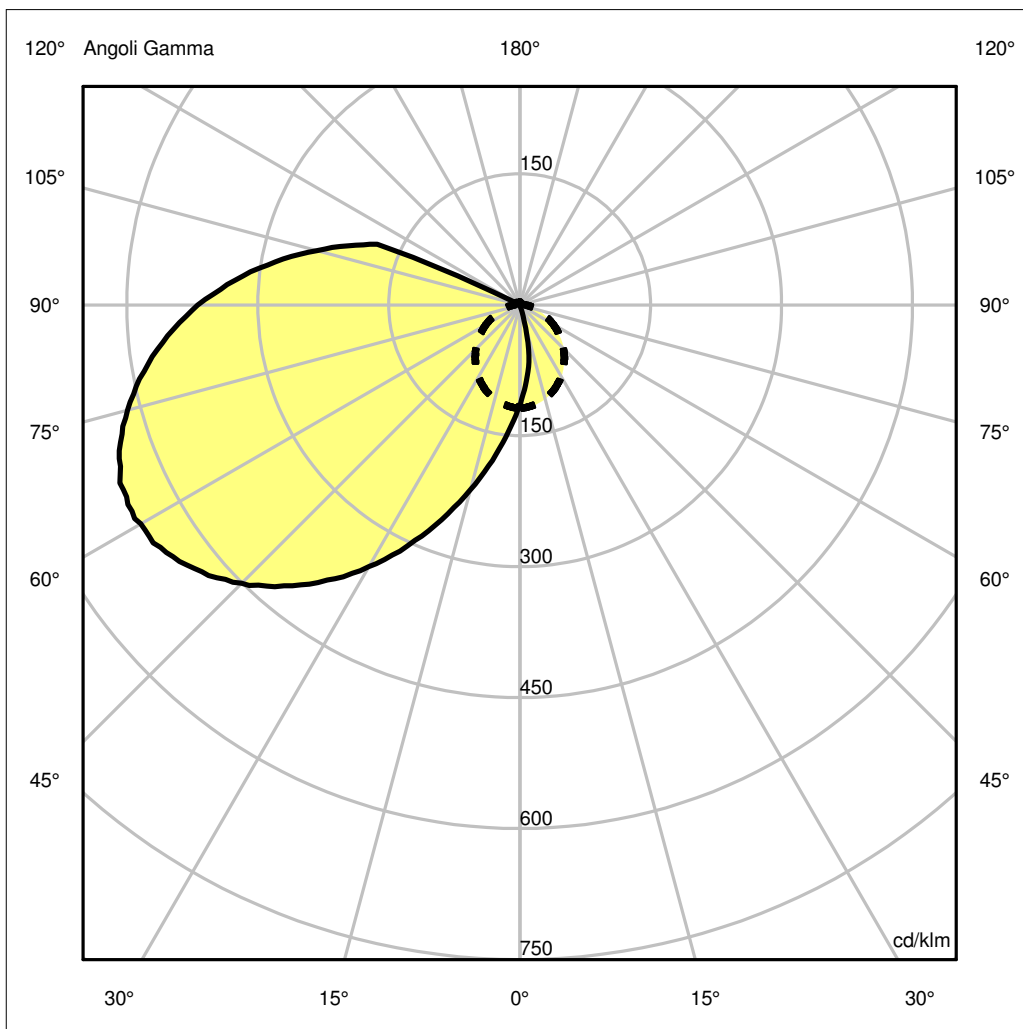

Luminaire

Code T081200
Name CICLOPE parete 6W 3000K grigio bianco

Measur.

Code FDS0000970
Name CICLOPE parete 6W 3000K grigio bianco

Luminaire Flux	382.72 lm	Luminaire Power	6.50 W	Efficacy	58.88 lm/W	Efficiency	100.00%
Lamps Flux	382.72 lm	Maximum value	504.75 cd/klm	Position	C=180.00 G=61.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	165 mm	Width	50 mm	Height	265 mm
Round Luminous Area		Diam.	100 mm	Height	0 mm		
Horizontal Luminous Area		0.007854 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001900 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		14-06-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		382.72 lm	
LED Flux=595,3lm LED Power=5W Eff=64% EfcLed=119lm/W EfcLum=59lm/W CCT=3000K Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	25 53 79 82 100			D DIN 5040	B11		
F UTE	0.82 J + 0.18 T			B NBN	BZ 8 / 2 / BZ 7		

Apertura a sinistra non trovata, gamma =-61

Apertura a sinistra non trovata, gamma =-61

Apertura a sinistra non trovata, gamma =-61