


Luminaire

Code 0165020A
Name COME TOGETHER T ALL.

Measurerm.

Code FTS1802057
Name COME TOGETHER T ALL.

Luminaire Flux	370.46 lm	Luminaire Power	3.60 W	Efficacy	102.91 lm/W	Efficiency	100.00%
Lamps Flux	370.46 lm	Maximum value	306.02 cd/klm	Position	C=0.00 G=180.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 70 mm Diam. 70 mm	Height	270 mm	Height	60 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.003848 m2 0.004200 m2 0.004200 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°			0.004200 m2 0.004200 m2 0.005006 m2		
Coordinate system	CG	Symmetry Type			Rotosymmetrical		
Date	17-10-2018	Maximum Gamma Angle			180		
Measurement Distance	0.00	Measurement Flux			370.46 lm		
RDN180468							
C.I.E.	37 71 91 74 100	D DIN 5040			B21		
F UTE	0.74 G + 0.26 T	B NBN			BZ 6 / 1.5 / BZ 5		

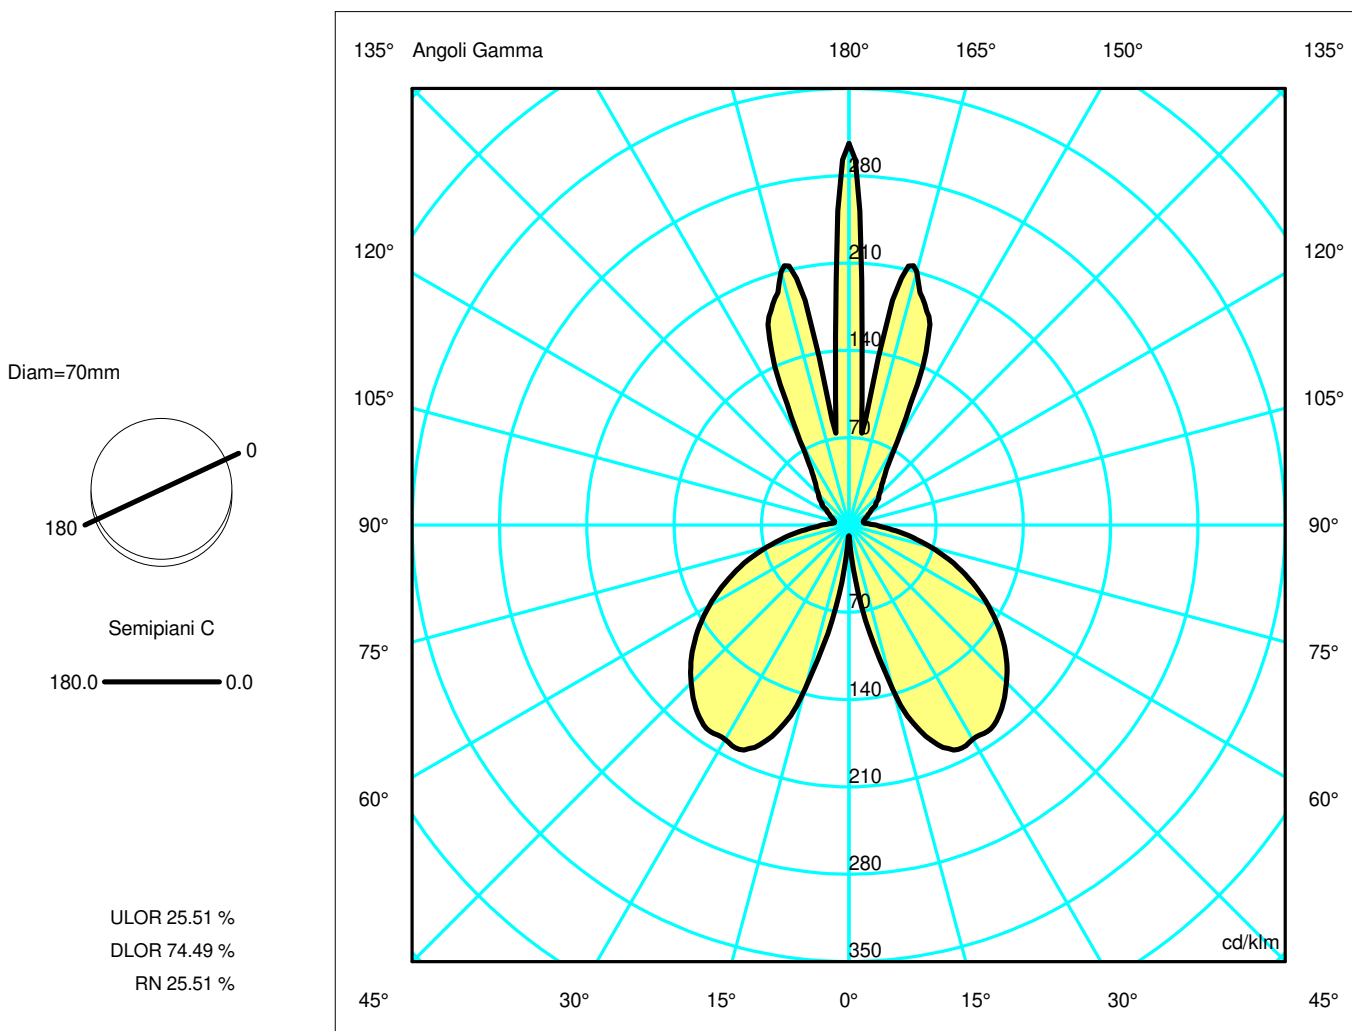

Luminaire

Code 0165020A
Name COME TOGETHER T ALL.

Measurerm.


Code FTS1802057
Name COME TOGETHER T ALL.

Luminaire Flux	370.46 lm	Luminaire Power	3.60 W	Efficacy	102.91 lm/W	Efficiency	100.00%
Lamps Flux	370.46 lm	Maximum value	306.02 cd/klm	Position	C=0.00 G=180.00	CG	Rotosymmetrical
Round Luminaire		Diam.	70 mm	Height	270 mm		
Round Luminous Area		Diam.	70 mm	Height	60 mm		
Horizontal Luminous Area	0.003848 m2			Emitting area on Plane 180°		0.004200 m2	
Emitting area on Plane 0°	0.004200 m2			Emitting area on Plane 270°		0.004200 m2	
Emitting area on Plane 90°	0.004200 m2			Glare area at 76°		0.005006 m2	
Coordinate system	CG			Symmetry Type		Rotosymmetrical	
Date	17-10-2018			Maximum Gamma Angle		180	
Measurement Distance	0.00			Measurement Flux		370.46 lm	
RDN180468							
C.I.E.	37 71 91 74 100			D DIN 5040	B21		
F UTE	0.74 G + 0.26 T			B NBN	BZ 6 / 1.5 / BZ 5		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.07	0.14	0.21	0.28	0.35	OC	0.07	0.14	0.21	0.28	0.35
OB	0.07	0.14	0.21	0.28	0.35	OD	0.07	0.14	0.21	0.28	0.35

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	113.37	45.38	77.88	52.07	18.98	12.69	8.63	5.97	4.44	5.63
OB	113.37	45.38	77.88	52.07	18.98	12.69	8.63	5.97	4.44	5.63
OC	113.37	45.38	77.88	52.07	18.98	12.69	8.63	5.97	4.44	5.63
OD	113.37	45.38	77.88	52.07	18.98	12.69	8.63	5.97	4.44	5.63

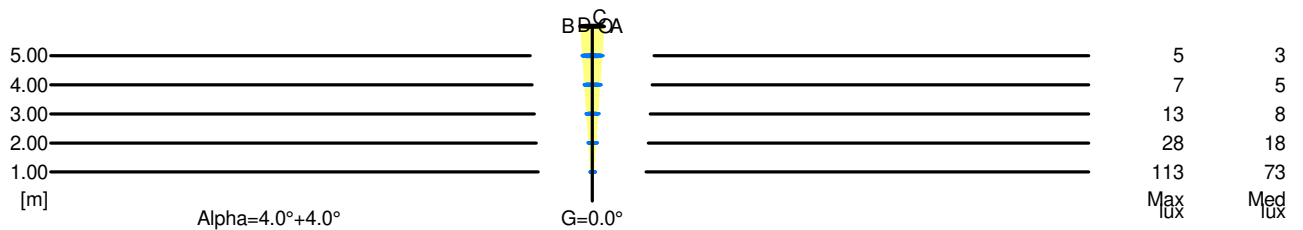

5.00	0.70	5	3		
4.00	0.56	7	5		
3.00	0.42	13	8		
2.00	0.28	28	18		
1.00	0.14	113	73		
H[m]	D[m]	Max lux	Med lux	Alpha=4.0°+4.0°	G=0.0