

Luminaire


Code T42104NW10
Name EFFETTO ROUND 4 FASCI STRETTI 18W 3000K ruggine

Measurum.

Code FTS0000862
Name EFFETTO ROUND 4 FASCI STRETTI 18W 3000K ruggine

Efficiency	100.00%	Coordinate system	CG	Total Flux	26.43 lm
Maximum value	5735.08 cd/klm	Position	C=195.00 G=89.00	Asymmetrical	
Rectangular Luminaire	Length 160 mm	Width	160 mm	Height	160 mm
Rectangular Luminous Area	Length 50 mm	Width	50 mm	Height	0 mm
Horizontal Luminous Area	0.002500 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2
Emitting area on Plane 0°	0.000000 m2	Glare area at 76°	0.000605 m2		
Emitting area on Plane 90°	0.000000 m2				
Date	18-12-2013	Maximum Gamma Angle	180		
Measurement Distance	0.00	Measurement Flux	26.43 lm		
Imax=5100 cd/klm - LED Flux=714 lm - LED Power=8.4 W - Eff=37 % - EfcLED=85 lm/W - EfcLum=15 lm/W Ra=80 Typ - SDCM=4 - Life=L70(14K)>81600 ore					
C.I.E.	43 50 46 50 100	D DIN 5040	C31		
F UTE	0.50 G + 0.50 T	B NBN	BZ 5 / 0.8 / BZ 6 / 1.25 / BZ 7 / 1.5 / BZ 8 / 2 / BZ 9 / 2.5 / B		


160mm x 160mm



Semipiani C

180.0 ——— 0.0
270.0 - - - - - 90.0

ULOR 50.00 %
DLOR 50.00 %
RN 50.00 %

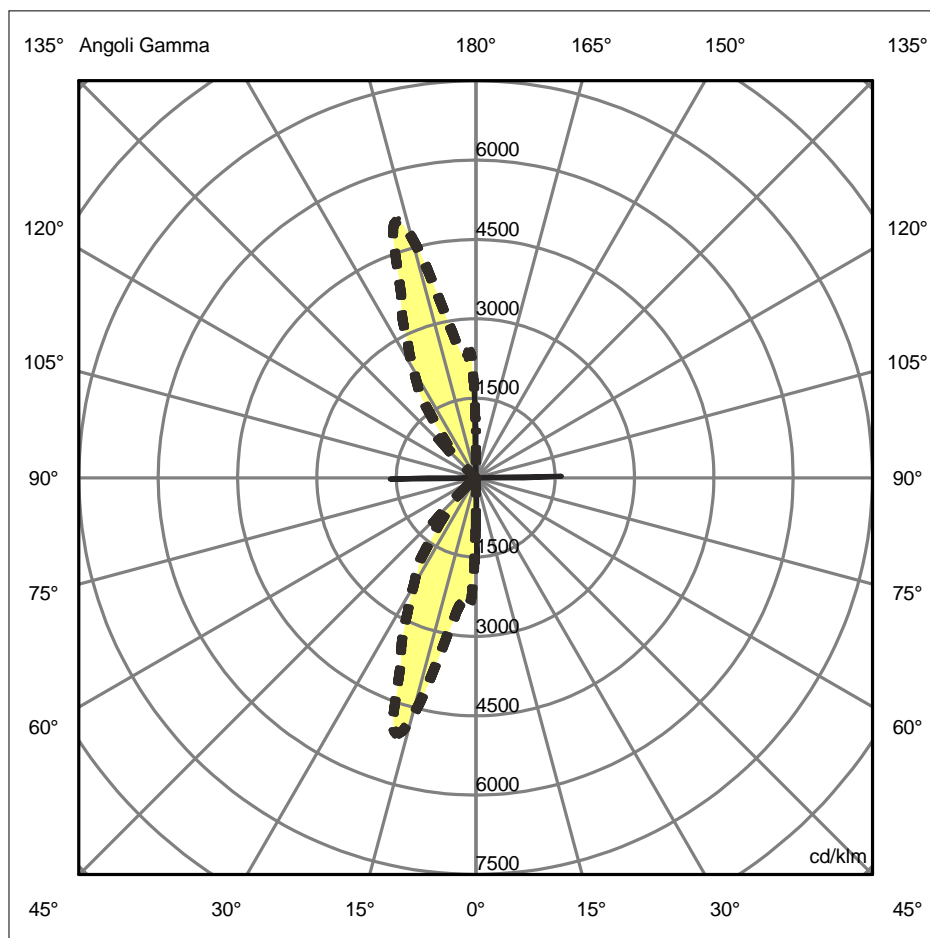

Luminaire

Code T42104NW10
 Name EFFETTO ROUND 4 FASCI STRETTI 18W 3000K ruggine

Measurement

Code FTS0000862
 Name EFFETTO ROUND 4 FASCI STRETTI 18W 3000K ruggine

Efficiency	100.00%	Coordinate system	CG	Total Flux	26.43 lm	
Maximum value	5735.08 cd/klm	Position	C=195.00 G=89.00	Asymmetrical		
Rectangular Luminaire Rectangular Luminous Area	Length Length	160 mm 50 mm	Width Width	160 mm 50 mm	Height Height	160 mm 0 mm
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.002500 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000605 m2	
Date Measurement Distance	18-12-2013 0.00		Maximum Gamma Angle Measurement Flux		180 26.43 lm	
Imax=5100 cd/klm - LED Flux=714 lm - LED Power=8.4 W - Eff=37 % - EfcLED=85 lm/W - EfcLum=15 lm/W Ra=80 Typ - SDCM=4 - Life=L70(14K)>81600 ore						
C.I.E. F UTE	43 50 46 50 100 0.50 G + 0.50 T		D DIN 5040 B NBN	C31 BZ 5 / 0.8 / BZ 6 / 1.25 / BZ 7 / 1.5 / BZ 8 / 2 / BZ 9 / 2.5 / B		

Apertura a sinistra non trovata, gamma =-89

Apertura a sinistra non trovata, gamma =-89

Apertura a sinistra non trovata, gamma =-89