

## Luminaire


Code M329545  
 Name EVERYTHING 105 QUADRATO TRIM ORIENTABILE LED 2700K WIDE FLOOD CORNICE NERO / DEFL. NERO

## Measurement

Code FTS1901010  
 Name EVERYTHING 105 QUADRATO TRIM ORIENTABILE LED 2700K WIDE FLOOD CORNICE NERO / DEFL. NERO

Luminaire Flux	707.56 lm	Luminaire Power	13.00 W	Efficacy	54.43 lm/W	Efficiency	100.00%
Sources Flux	707.56 lm	Maximum value	1489.36 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	105 mm 50 mm	Width Height	105 mm 0 mm	Height	115 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.001963 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000475 m2				
Coordinate system Date Measurement Distance	CG 06-07-2015 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 707.56 lm				
LED Flux=1330lm LED Power=13W Eff=53,2% EfcLed=102lm/W EfcLum=54lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	96 100 100 100 100 1.00 A	D DIN 5040 B NBN	A60 BZ 1				


105mm x 105mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
 DLOR 100.00 %  
 RN 0.00 %

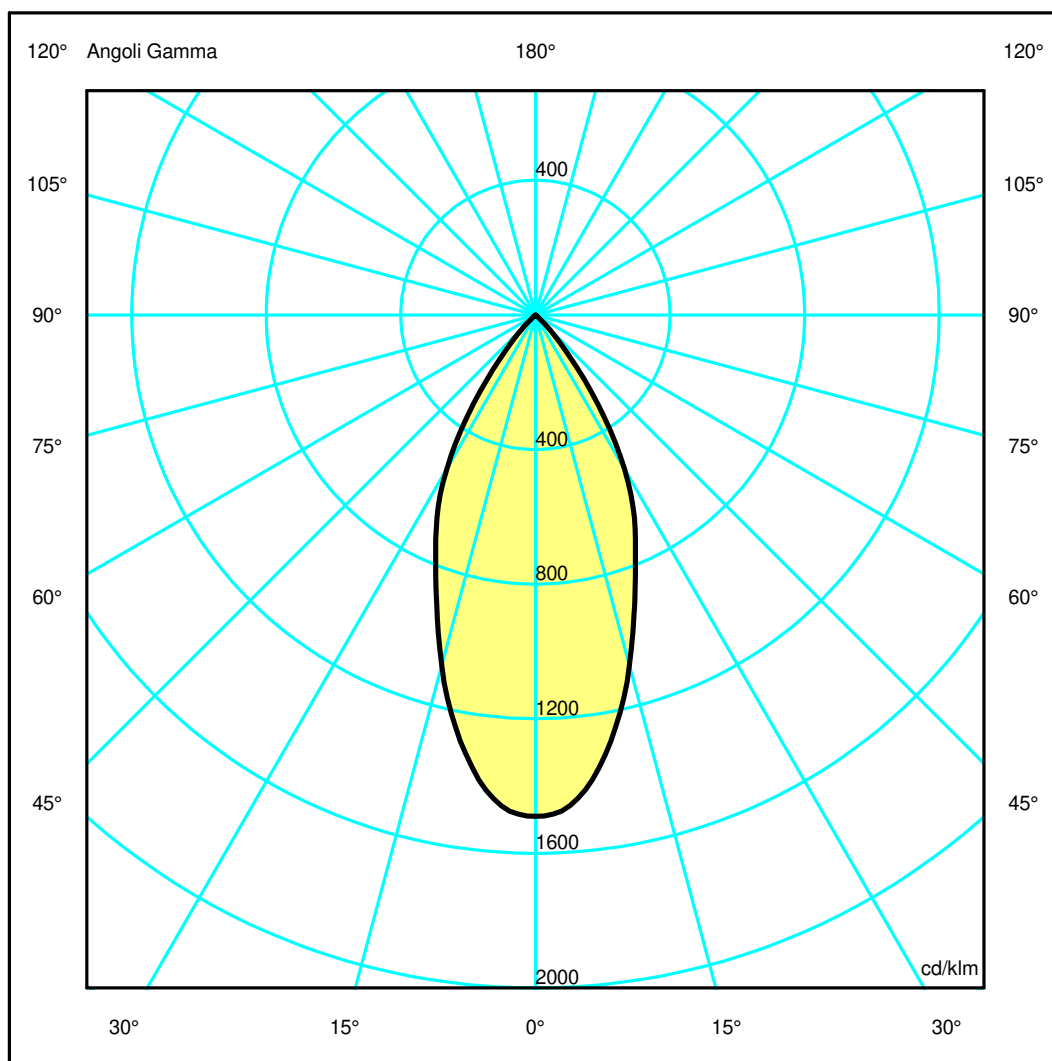

## Luminaire

Code M329545  
 Name EVERYTHING 105 QUADRATO TRIM ORIENTABILE LED 2700K WIDE FLOOD CORNICE NERO / DEFL. NERO

## Measurement


Code FTS1901010  
 Name EVERYTHING 105 QUADRATO TRIM ORIENTABILE LED 2700K WIDE FLOOD CORNICE NERO / DEFL. NERO

Luminaire Flux	707.56 lm	Luminaire Power	13.00 W	Efficacy	54.43 lm/W	Efficiency	100.00%
Sources Flux	707.56 lm	Maximum value	1489.36 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	105 mm 50 mm	Width Height	105 mm 0 mm	Height	115 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.001963 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000475 m2				
Coordinate system Date Measurement Distance	CG 06-07-2015 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 707.56 lm				
LED Flux=1330lm LED Power=13W Eff=53,2% EfcLed=102lm/W EfcLum=54lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	96 100 100 100 100 1.00 A	D DIN 5040 B NBN	A60 BZ 1				

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.43	0.87	1.30	1.74	2.17	OC	0.43	0.87	1.30	1.74	2.17
OB	0.43	0.87	1.30	1.74	2.17	OD	0.43	0.87	1.30	1.74	2.17

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	1053.74	1020.41	762.91	494.63	227.27	35.03	2.20	0.93	0.59	0.32
OB	1053.74	1020.41	762.91	494.63	227.27	35.03	2.20	0.93	0.59	0.32
OC	1053.74	1020.41	762.91	494.63	227.27	35.03	2.20	0.93	0.59	0.32
OD	1053.74	1020.41	762.91	494.63	227.27	35.03	2.20	0.93	0.59	0.32

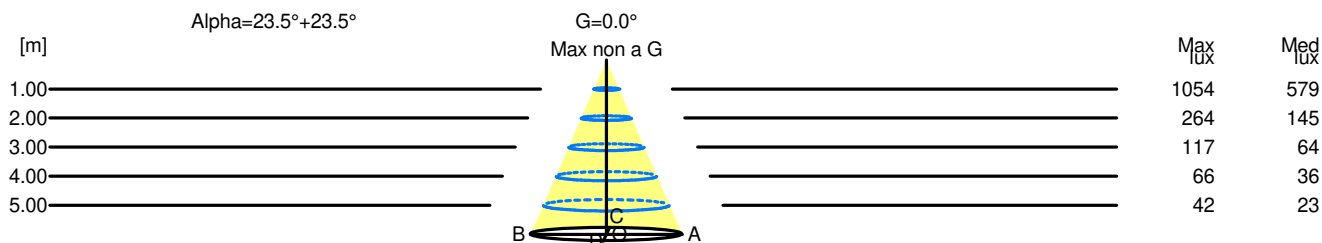

H[m]	D[m]	Max lux	Med lux	Alpha=23.5°+23.5°	G=0.0 Max non a G
1.00	0.87	1054	579		
2.00	1.74	264	145		
3.00	2.61	117	64		
4.00	3.48	66	36		
5.00	4.35	42	23		