

Luminaire

Code M260200
 Name EVERYTHING 105 QUADRATO TRIMLESS FISSO LED 3000K FLOOD DEFL. METALLIZZATO

Measurement

Code FTS1602385
 Name EVERYTHING 105 QUADRATO TRIMLESS FISSO LED 3000K FLOOD DEFL. METALLIZZATO

Luminaire Flux	704.73 lm	Luminaire Power	13.00 W	Efficacy	54.21 lm/W	Efficiency	100.00%
Sources Flux	704.73 lm	Maximum value	1723.54 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	105 mm 50 mm	Width Height	105 mm 0 mm	Height	115 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.001963 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000475 m2				
Coordinate system Date Measurement Distance	CG 06-07-2015 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 704.73 lm				
LED Flux=1390lm LED Power=13W Eff=50,7% EfcLed=107lm/W EfcLum=54lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	95 100 100 100 100 1.00 A	D DIN 5040 B NBN	A60 BZ 1				


105mm x 105mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

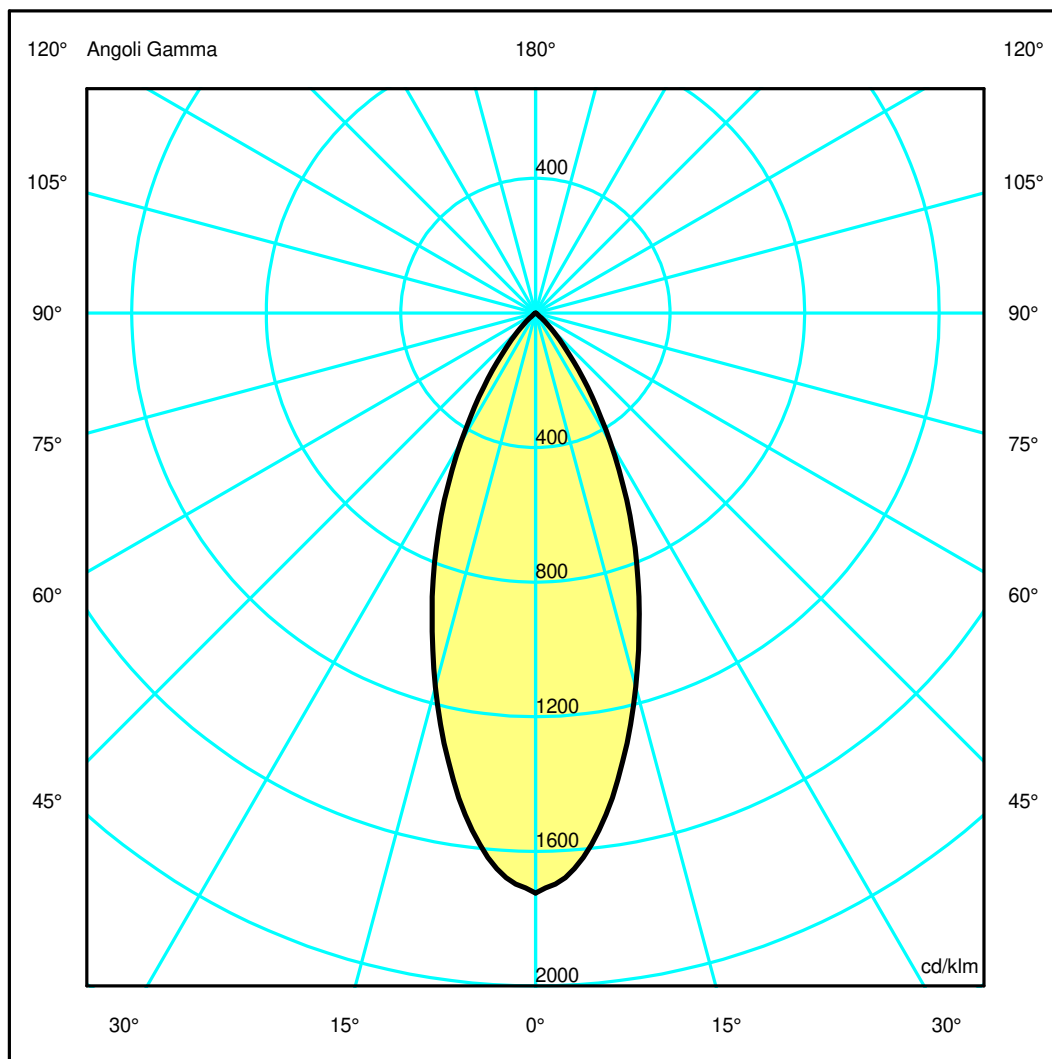

Luminaire

Code M260200
Name EVERYTHING 105 QUADRATO TRIMLESS FISSO LED 3000K FLOOD DEFL. METALLIZZATO

Measurement


Code FTS1602385
Name EVERYTHING 105 QUADRATO TRIMLESS FISSO LED 3000K FLOOD DEFL. METALLIZZATO

Luminaire Flux	704.73 lm	Luminaire Power	13.00 W	Efficacy	54.21 lm/W	Efficiency	100.00%
Sources Flux	704.73 lm	Maximum value	1723.54 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area		Length Diam.	105 mm 50 mm	Width Height	105 mm 0 mm	Height	115 mm
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.001963 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000475 m2	
Coordinate system Date Measurement Distance		CG 06-07-2015 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 704.73 lm	
LED Flux=1390lm LED Power=13W Eff=50,7% EfcLed=107lm/W EfcLum=54lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	95 100 100 100 100 1.00 A			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.38	0.76	1.14	1.51	1.89	OC	0.38	0.76	1.14	1.51	1.89
OB	0.38	0.76	1.14	1.51	1.89	OD	0.38	0.76	1.14	1.51	1.89

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1214.63	1144.53	810.51	468.13	189.91	46.80	2.53	0.52	0.35	0.26
OB	1214.63	1144.53	810.51	468.13	189.91	46.80	2.53	0.52	0.35	0.26
OC	1214.63	1144.53	810.51	468.13	189.91	46.80	2.53	0.52	0.35	0.26
OD	1214.63	1144.53	810.51	468.13	189.91	46.80	2.53	0.52	0.35	0.26

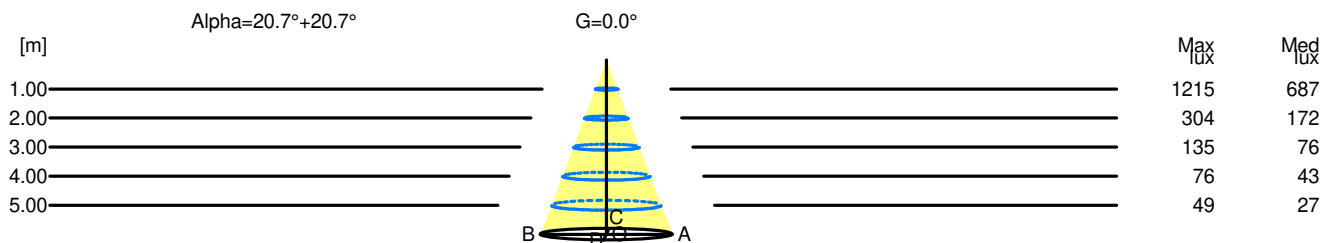

H[m]	D[m]	Max lux	Med lux	Alpha=20.7°+20.7°	G=0.0
1.00	0.76	1215	687		
2.00	1.51	304	172		
3.00	2.27	135	76		
4.00	3.03	76	43		
5.00	3.79	49	27		