

Luminaire

Code M260005
 Name EVERYTHING 105 QUADRATO TRIMLESS ORIENTABILE LED 3000K SPOT DEFL. METALLIZZATO

Measurement

Code FTS1602362
 Name EVERYTHING 105 QUADRATO TRIMLESS ORIENTABILE LED 3000K SPOT DEFL. METALLIZZATO

Luminaire Flux	975.78 lm	Luminaire Power	13.00 W	Efficacy	75.06 lm/W	Efficiency	100.00%
Sources Flux	975.78 lm	Maximum value	3457.74 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	105 mm 50 mm	Width Height	105 mm 0 mm	Height	115 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.001963 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000475 m2				
Coordinate system Date Measurement Distance	CG 10-04-2015 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 90 975.78 lm				
LED Flux=1390lm LED Power=13W Eff=70,2% EfcLed=107lm/W EfcLum=75lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	100 100 100 100 100 --	D DIN 5040 B NBN	A60 BZ 1				


105mm x 105mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

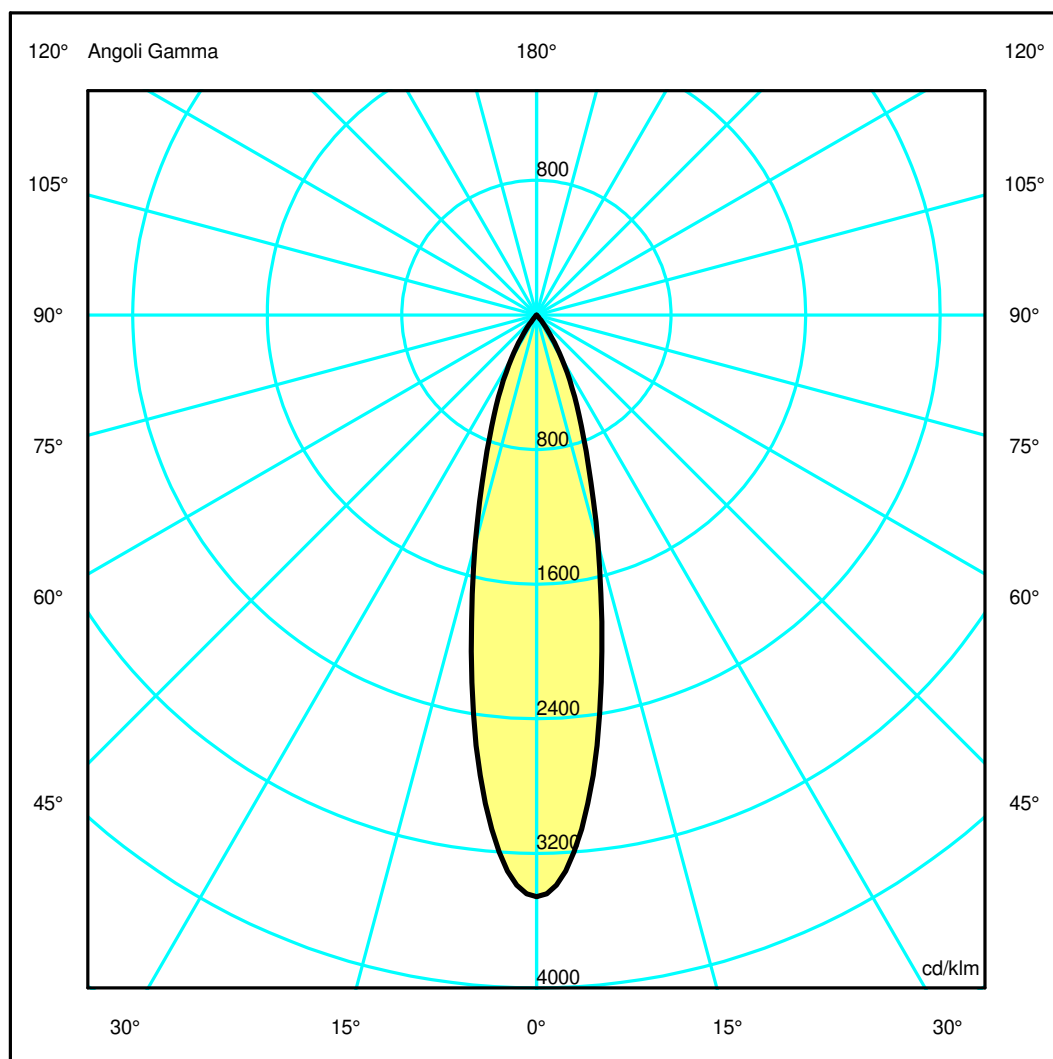

Luminaire

Code M260005
Name EVERYTHING 105 QUADRATO TRIMLESS ORIENTABILE LED 3000K SPOT DEFL. METALLIZZATO

Measurement


Code FTS1602362
Name EVERYTHING 105 QUADRATO TRIMLESS ORIENTABILE LED 3000K SPOT DEFL. METALLIZZATO

Luminaire Flux	975.78 lm	Luminaire Power	13.00 W	Efficacy	75.06 lm/W	Efficiency	100.00%
Sources Flux	975.78 lm	Maximum value	3457.74 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area		Length Diam.	105 mm 50 mm	Width Height	105 mm 0 mm	Height	115 mm
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.001963 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000475 m2	
Coordinate system Date Measurement Distance		CG 10-04-2015 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 90 975.78 lm	
LED Flux=1390lm LED Power=13W Eff=70,2% EfcLed=107lm/W EfcLum=75lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	100 100 100 100 100 --			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.23	0.46	0.68	0.91	1.14	OC	0.23	0.46	0.68	0.91	1.14
OB	0.23	0.46	0.68	0.91	1.14	OD	0.23	0.46	0.68	0.91	1.14

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3374.00	2992.58	1376.55	521.31	132.65	6.54	0.00	0.00	0.00	0.00
OB	3374.00	2992.58	1376.55	521.31	132.65	6.54	0.00	0.00	0.00	0.00
OC	3374.00	2992.58	1376.55	521.31	132.65	6.54	0.00	0.00	0.00	0.00
OD	3374.00	2992.58	1376.55	521.31	132.65	6.54	0.00	0.00	0.00	0.00

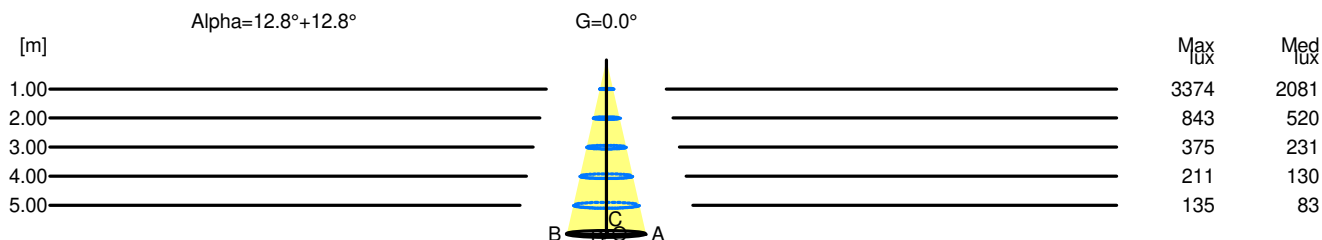

H[m]	D[m]	Max lux	Med lux	Alpha=12.8°+12.8°	G=0.0
1.00	0.46	3374	2081		
2.00	0.91	843	520		
3.00	1.37	375	231		
4.00	1.82	211	130		
5.00	2.28	135	83		