

Luminaire

Code M260665
 Name EVERYTHING 150 TONDO TRIM ORIENTABILE LED FLOOD CORNICE GRIGIO / DEFL. NERO 3000K

Measurem.

Code FTS1602437
 Name EVERYTHING 150 TONDO TRIM ORIENTABILE LED FLOOD CORNICE GRIGIO / DEFL. NERO 3000K

Luminaire Flux	2044.62 lm	Luminaire Power	24.00 W	Efficacy	85.19 lm/W	Efficiency	100.00%
Sources Flux	2044.62 lm	Maximum value	4914.34 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	150 mm	Height	137 mm		
Round Luminous Area		Diam.	120 mm	Height	0 mm		
Horizontal Luminous Area		0.011310 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002736 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		04-03-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		2044.62 lm	
LED Flux=2763lm LED Power=24W Eff=74% EfcLed=115lm/W EfcLum=85lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	99	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	

Diam=150mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

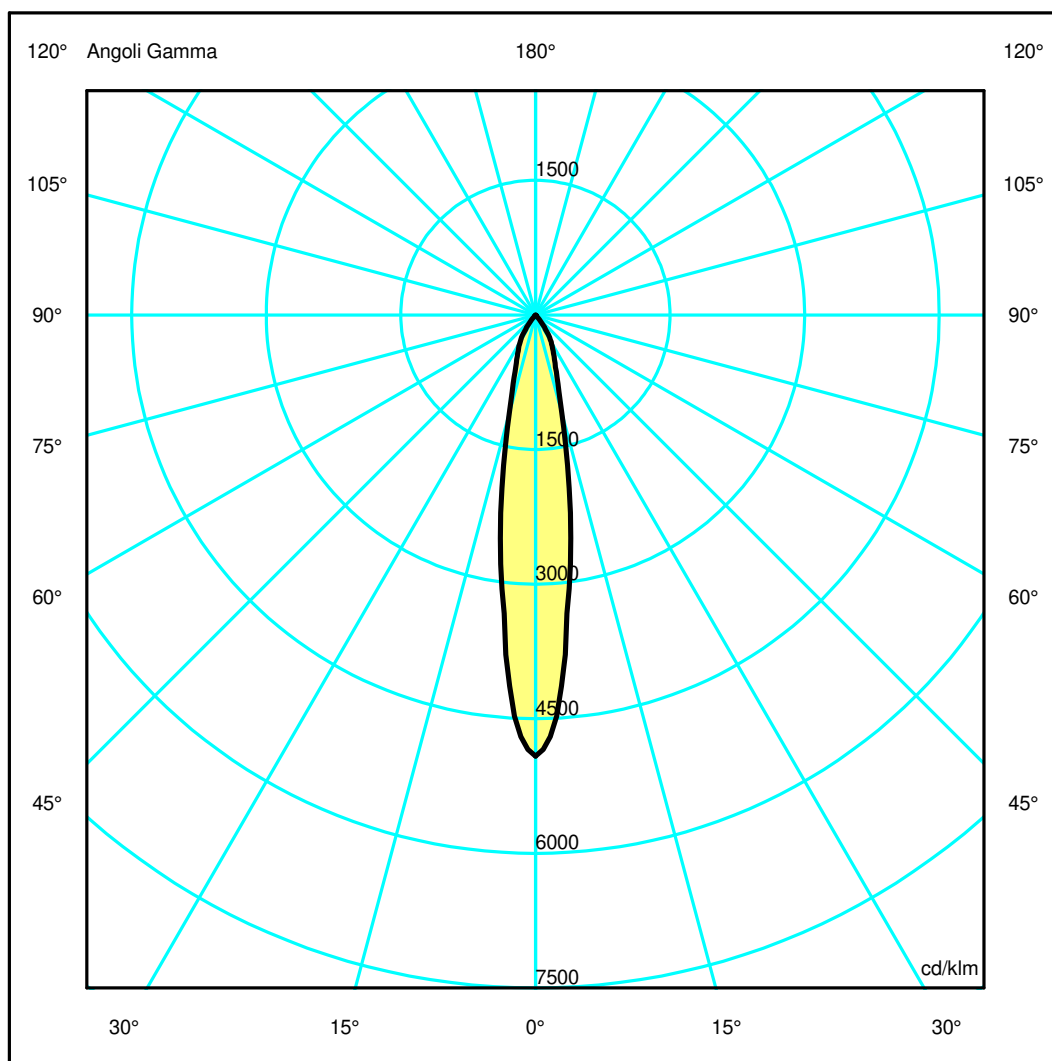

Luminaire

Code M260665
Name EVERYTHING 150 TONDO TRIM ORIENTABILE LED FLOOD CORNICE GRIGIO / DEFL. NERO 3000K

Measurement


Code FTS1602437
Name EVERYTHING 150 TONDO TRIM ORIENTABILE LED FLOOD CORNICE GRIGIO / DEFL. NERO 3000K

Luminaire Flux	2044.62 lm	Luminaire Power	24.00 W	Efficacy	85.19 lm/W	Efficiency	100.00%
Sources Flux	2044.62 lm	Maximum value	4914.34 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	150 mm	Height	137 mm		
Round Luminous Area		Diam.	120 mm	Height	0 mm		
Horizontal Luminous Area		0.011310 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002736 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		04-03-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		2044.62 lm	
LED Flux=2763lm LED Power=24W Eff=74% EfcLed=115lm/W EfcLum=85lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.16	0.32	0.49	0.65	0.81	OC	0.16	0.32	0.49	0.65	0.81
OB	0.16	0.32	0.49	0.65	0.81	OD	0.16	0.32	0.49	0.65	0.81

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	10047.97	7769.72	2311.33	966.70	395.32	28.50	5.65	0.74	0.24	0.08
OB	10047.97	7769.72	2311.33	966.70	395.32	28.50	5.65	0.74	0.24	0.08
OC	10047.97	7769.72	2311.33	966.70	395.32	28.50	5.65	0.74	0.24	0.08
OD	10047.97	7769.72	2311.33	966.70	395.32	28.50	5.65	0.74	0.24	0.08

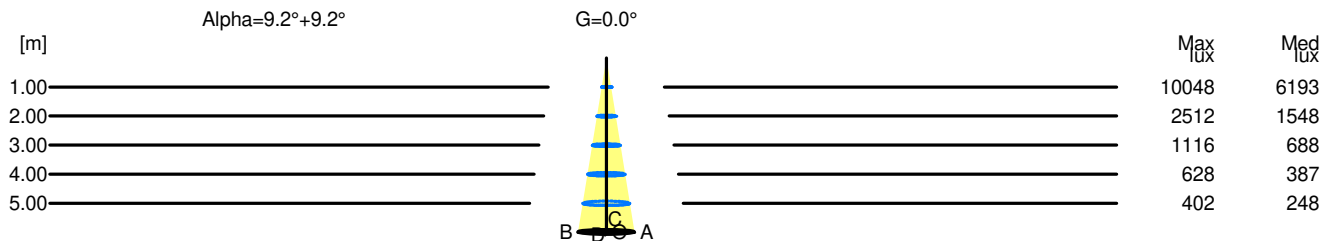

H[m]	D[m]	Max lux	Med lux	Alpha=9.2°+9.2°	G=0.0
1.00	0.32	10048	6193		
2.00	0.65	2512	1548		
3.00	0.97	1116	688		
4.00	1.30	628	387		
5.00	1.62	402	248		