

Luminaire

Code M325200
Name EVERYTHING 150 QUADRATO TRIMLESS FISSO LED WIDE FLOOD DEFL. NERO 2700K

Measurem.

Code FTS1602599
Name EVERYTHING 150 QUADRATO TRIMLESS FISSO LED WIDE FLOOD DEFL. NERO 2700K

Luminaire Flux	1727.19 lm	Luminaire Power	24.00 W	Efficacy	71.97 lm/W	Efficiency	100.00%
Sources Flux	1727.19 lm	Maximum value	2825.85 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	150 mm	Height	137 mm		
Round Luminous Area		Diam.	120 mm	Height	0 mm		
Horizontal Luminous Area			0.011310 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.002736 m2
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		04-03-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1727.19 lm	
LED Flux=2645lm LED Power=24W Eff=65,3% EfcLed=110lm/W EfcLum=72lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	97	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	

Diam=150mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

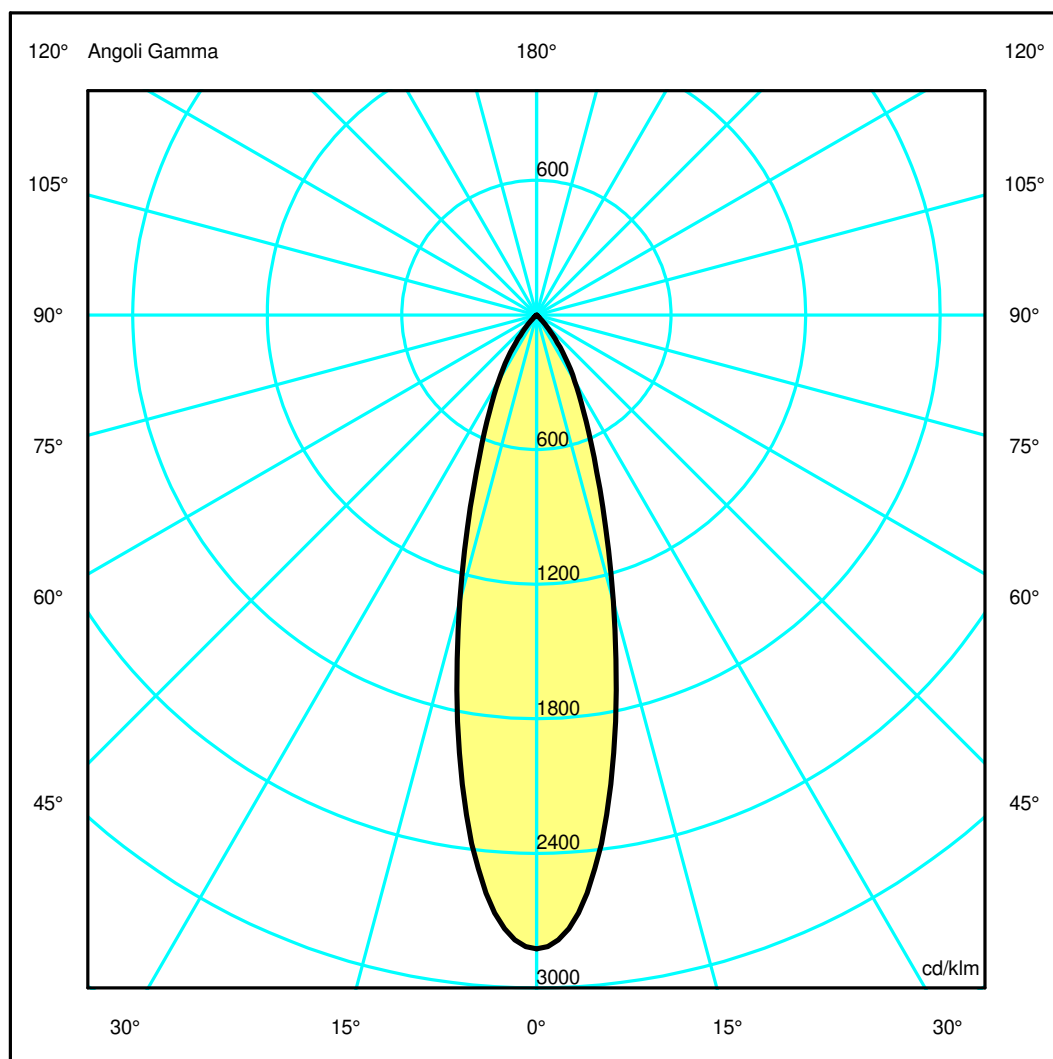

Luminaire

Code M325200
Name EVERYTHING 150 QUADRATO TRIMLESS FISSO LED WIDE FLOOD DEFL. NERO 2700K

Measurement


Code FTS1602599
Name EVERYTHING 150 QUADRATO TRIMLESS FISSO LED WIDE FLOOD DEFL. NERO 2700K

Luminaire Flux	1727.19 lm	Luminaire Power	24.00 W	Efficacy	71.97 lm/W	Efficiency	100.00%
Sources Flux	1727.19 lm	Maximum value	2825.85 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	150 mm	Height	137 mm		
Round Luminous Area		Diam.	120 mm	Height	0 mm		
Horizontal Luminous Area		0.011310 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002736 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		04-03-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1727.19 lm	
LED Flux=2645lm LED Power=24W Eff=65,3% EfcLed=110lm/W EfcLum=72lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	97	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.25	0.51	0.76	1.02	1.27	OC	0.25	0.51	0.76	1.02	1.27
OB	0.25	0.51	0.76	1.02	1.27	OD	0.25	0.51	0.76	1.02	1.27

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	4880.78	4467.44	2282.90	903.82	352.28	59.78	6.91	0.60	0.21	0.07
OB	4880.78	4467.44	2282.90	903.82	352.28	59.78	6.91	0.60	0.21	0.07
OC	4880.78	4467.44	2282.90	903.82	352.28	59.78	6.91	0.60	0.21	0.07
OD	4880.78	4467.44	2282.90	903.82	352.28	59.78	6.91	0.60	0.21	0.07

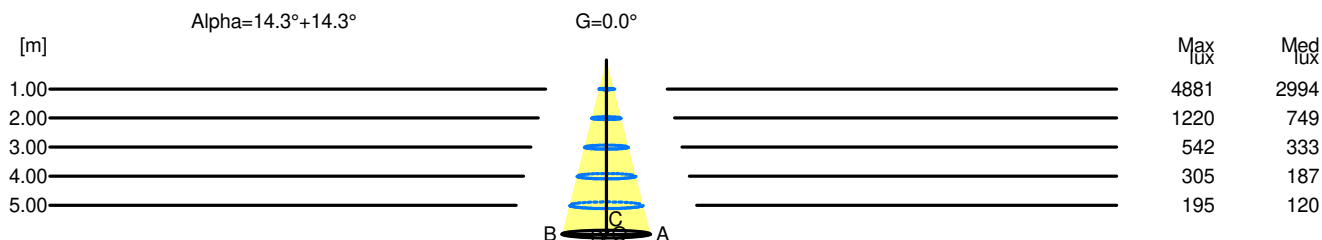

H[m]	D[m]	Max lux	Med lux	Alpha=14.3°+14.3°	G=0.0
1.00	0.51	4881	2994		
2.00	1.02	1220	749		
3.00	1.53	542	333		
4.00	2.03	305	187		
5.00	2.54	195	120		