

Luminaire

Code M264805
 Name EVERYTHING 150 QUADRATO TRIMLESS ORIENTABILE LED FLOOD DEFL. METALIZZATO 3000K

Measurem.

Code FTS1602533
 Name EVERYTHING 150 QUADRATO TRIMLESS ORIENTABILE LED FLOOD DEFL. METALIZZATO 3000K

Luminaire Flux	2431.44 lm	Luminaire Power	24.00 W	Efficacy	101.31 lm/W	Efficiency	100.00%
Sources Flux	2431.44 lm	Maximum value	5207.68 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	150 mm	Height	137 mm		
Round Luminous Area		Diam.	120 mm	Height	0 mm		
Horizontal Luminous Area			0.011310 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.002736 m2
Coordinate system		CG		Symmetry Type			Rotosymmetrical
Date		11-03-2015		Maximum Gamma Angle			90
Measurement Distance		0.00		Measurement Flux			2431.44 lm
LED Flux=2763lm LED Power=24W Eff=88% EfcLed=115lm/W EfcLum=101lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	99	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	

Diam=150mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

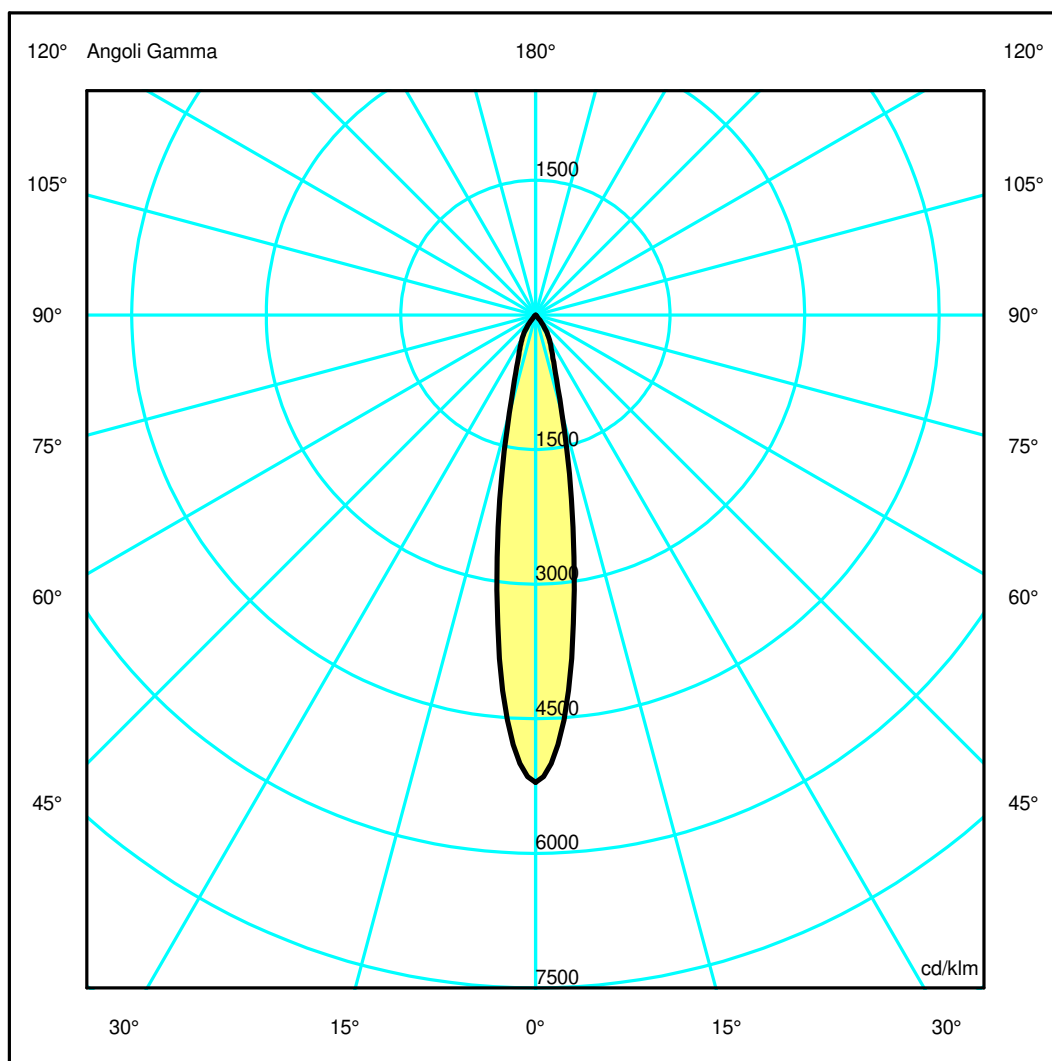

Luminaire

Code M264805
Name EVERYTHING 150 QUADRATO TRIMLESS ORIENTABILE LED FLOOD DEFL. METALIZZATO 3000K

Measurement


Code FTS1602533
Name EVERYTHING 150 QUADRATO TRIMLESS ORIENTABILE LED FLOOD DEFL. METALIZZATO 3000K

Luminaire Flux	2431.44 lm	Luminaire Power	24.00 W	Efficacy	101.31 lm/W	Efficiency	100.00%
Sources Flux	2431.44 lm	Maximum value	5207.68 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	150 mm	Height	137 mm		
Round Luminous Area		Diam.	120 mm	Height	0 mm		
Horizontal Luminous Area		0.011310 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002736 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		11-03-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		2431.44 lm	
LED Flux=2763lm LED Power=24W Eff=88% EfcLed=115lm/W EfcLum=101lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.17	0.33	0.50	0.66	0.83	OC	0.17	0.33	0.50	0.66	0.83
OB	0.17	0.33	0.50	0.66	0.83	OD	0.17	0.33	0.50	0.66	0.83

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	12662.16	10212.94	2746.32	1011.55	443.19	33.80	6.15	0.00	0.00	0.00
OB	12662.16	10212.94	2746.32	1011.55	443.19	33.80	6.15	0.00	0.00	0.00
OC	12662.16	10212.94	2746.32	1011.55	443.19	33.80	6.15	0.00	0.00	0.00
OD	12662.16	10212.94	2746.32	1011.55	443.19	33.80	6.15	0.00	0.00	0.00

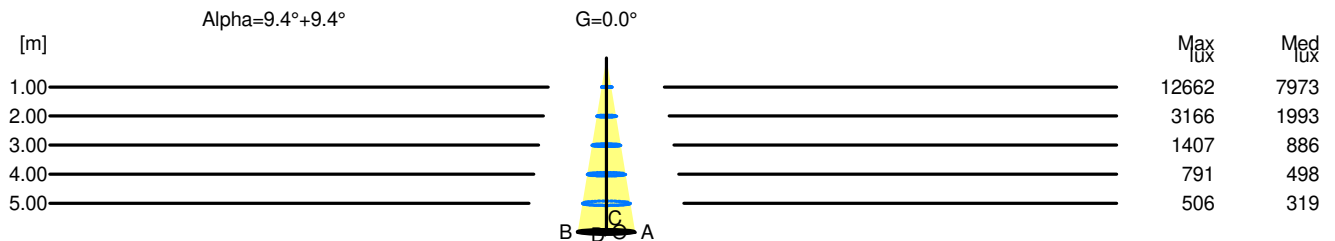

H[m]	D[m]	Max lux	Med lux	Alpha=9.4°+9.4°	G=0.0
1.00	0.33	12662	7973		
2.00	0.66	3166	1993		
3.00	0.99	1407	886		
4.00	1.32	791	498		
5.00	1.65	506	319		