

Luminaire

Code M327125
 Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K WIDE FLOOD CORNICE BIANCO / DEFL. BIANCO

Measurement


Code FTS1602761
 Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K WIDE FLOOD CORNICE BIANCO / DEFL. BIANCO

Luminaire Flux	985.53 lm	Luminaire Power	13.00 W	Efficacy	75.81 lm/W	Efficiency	100.00%
Sources Flux	985.53 lm	Maximum value	1194.46 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire Round Luminous Area		Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.001963 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000475 m2	
Coordinate system Date Measurement Distance		CG 08-04-2015 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Double Symmetrical 90 985.53 lm	


LED Flux=1330lm LED Power=13W Eff=74,1% EfcLed=102lm/W EfcLum=76lm/W Ra=90 SDCM=3 L70(6K)=50000h

C.I.E. 83 94 99 100 100
 F UTE 1.00 B

D DIN 5040
 B NBN
 A60
 BZ 1

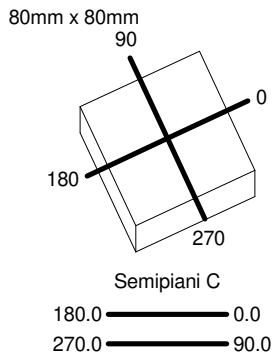

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

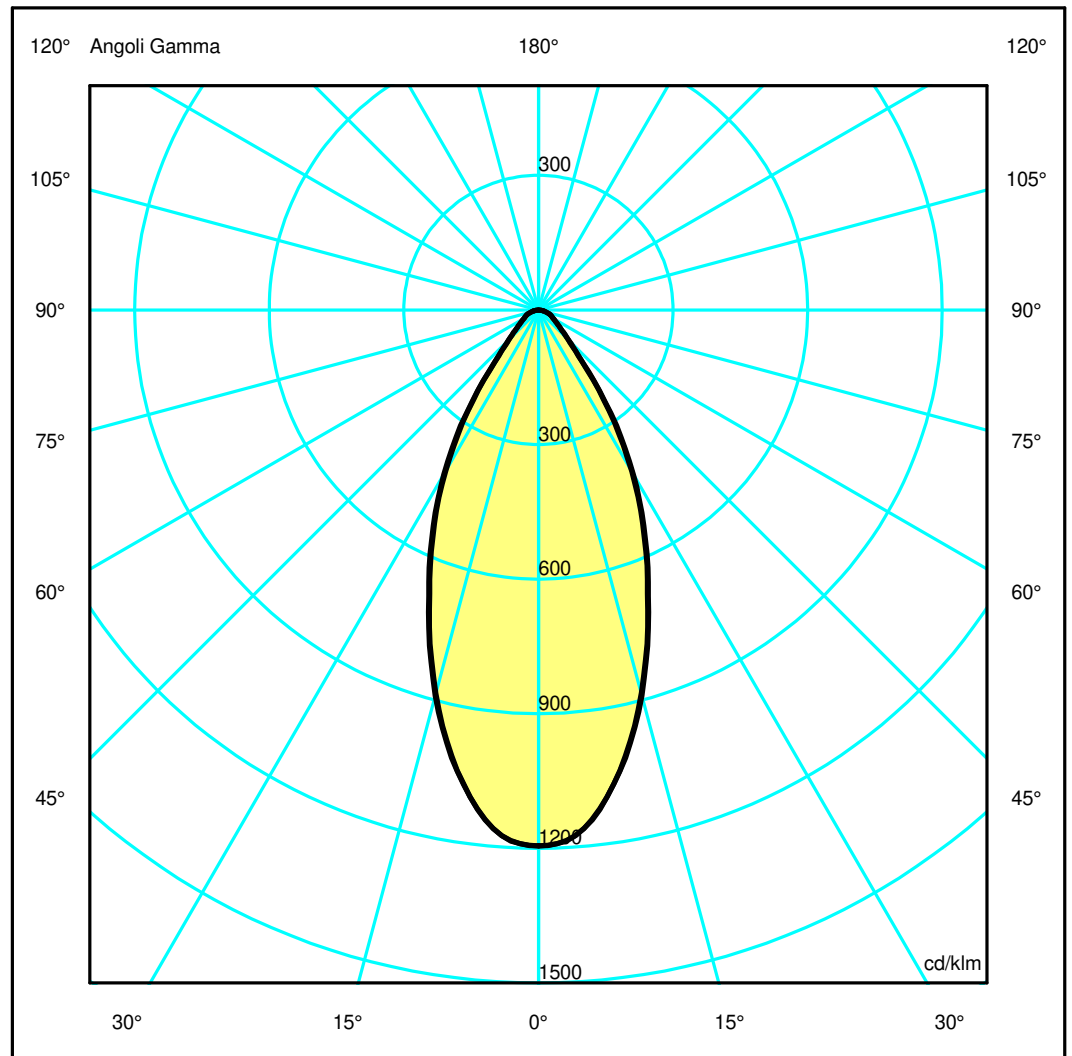

Luminaire

Code M327125
Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K WIDE FLOOD CORNICE BIANCO / DEFL. BIANCO

Measurem.


Code FTS1602761
Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K WIDE FLOOD CORNICE BIANCO / DEFL. BIANCO

Luminaire Flux	985.53 lm	Luminaire Power	13.00 W	Efficacy	75.81 lm/W	Efficiency	100.00%
Sources Flux	985.53 lm	Maximum value	1194.46 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.001963 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000475 m2				
Coordinate system Date Measurement Distance	CG 08-04-2015 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Double Symmetrical 90 985.53 lm				
LED Flux=1330lm LED Power=13W Eff=74,1% EfcLed=102lm/W EfcLum=76lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	83 94 99 100 100 1.00 B	D DIN 5040 B NBN	A60 BZ 1				

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.44	0.89	1.33	1.77	2.22	OC	0.44	0.88	1.32	1.76	2.19
OB	0.44	0.89	1.33	1.77	2.22	OD	0.44	0.88	1.32	1.76	2.19

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1177.18	1143.13	876.80	555.91	276.52	93.08	48.31	31.71	18.10	4.76
OB	1177.18	1143.13	876.80	555.91	276.52	93.08	48.31	31.71	18.10	4.76
OC	1177.18	1142.72	871.34	549.64	269.21	92.29	47.72	31.17	17.77	4.79
OD	1177.18	1142.72	871.34	549.64	269.21	92.29	47.72	31.17	17.77	4.79

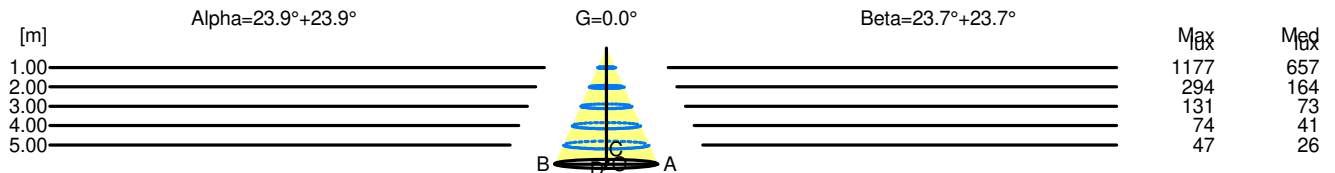

H[m]	D[m]	Max lux	Med lux	Alpha=23.9°+23.9°	G=0.0
1.00	0.89	1177	657		
2.00	1.77	294	164		
3.00	2.66	131	73		
4.00	3.55	74	41		
5.00	4.43	47	26		

H[m]	D[m]	Max lux	Med lux	Beta=23.7°+23.7°	G=0.0
1.00	0.88	1177	657		
2.00	1.76	294	164		
3.00	2.63	131	73		
4.00	3.51	74	41		
5.00	4.39	47	26		