

Luminaire

Code M326060
Name EVERYTHING 80 TONDO TRIM FISSO LED 2700K SPOT CORNICE SILVER / DEFL. NERO

Measurement

Code FTS1602666
Name EVERYTHING 80 TONDO TRIM FISSO LED 2700K SPOT CORNICE SILVER / DEFL. NERO

| | | | | | | | |
|----------------------------|-----------|-------------------------|----------------|-----------------------------|---------------|-------------------------|-----------------|
| Luminaire Flux | 833.91 lm | Luminaire Power | 13.00 W | Efficacy | 64.15 lm/W | Efficiency | 100.00% |
| Sources Flux | 833.91 lm | Maximum value | 4048.68 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Round Luminaire | | Diam. | 80 mm | Height | 115 mm | | |
| Round Luminous Area | | Diam. | 50 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | 0.001963 m ² | | Emitting area on Plane 180° | | 0.000000 m ² | |
| Emitting area on Plane 0° | | 0.000000 m ² | | Emitting area on Plane 270° | | 0.000000 m ² | |
| Emitting area on Plane 90° | | 0.000000 m ² | | Glare area at 76° | | 0.000475 m ² | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 26-06-2015 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 833.91 lm | |

LED Flux=1330lm LED Power=13W Eff=62,7% EfcLed=102lm/W EfcLum=64lm/W Ra=90 SDCM=3 L70(6K)=50000h

C.I.E. 99 100 100 100 100
F UTE --

D DIN 5040
B NBN
A60
BZ 1


Diam=80mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

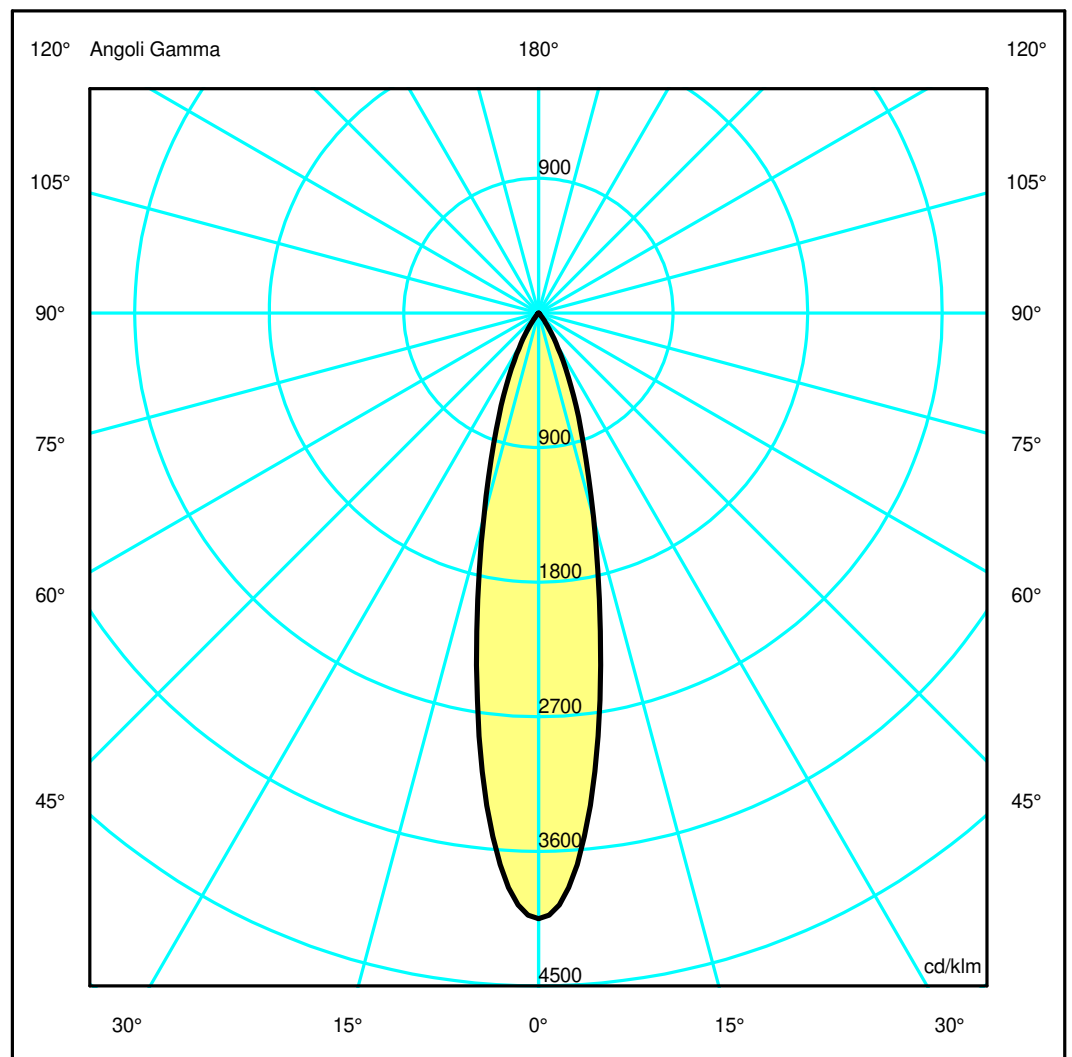

Luminaire

Code M326060
Name EVERYTHING 80 TONDO TRIM FISSO LED 2700K SPOT CORNICE SILVER / DEFL. NERO

Measurement


Code FTS1602666
Name EVERYTHING 80 TONDO TRIM FISSO LED 2700K SPOT CORNICE SILVER / DEFL. NERO

| | | | | | | | |
|--|-----------|-------------------------|----------------|-----------------------------|---------------|-------------------------|-----------------|
| Luminaire Flux | 833.91 lm | Luminaire Power | 13.00 W | Efficacy | 64.15 lm/W | Efficiency | 100.00% |
| Sources Flux | 833.91 lm | Maximum value | 4048.68 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Round Luminaire | | Diam. | 80 mm | Height | 115 mm | | |
| Round Luminous Area | | Diam. | 50 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | 0.001963 m ² | | Emitting area on Plane 180° | | 0.000000 m ² | |
| Emitting area on Plane 0° | | 0.000000 m ² | | Emitting area on Plane 270° | | 0.000000 m ² | |
| Emitting area on Plane 90° | | 0.000000 m ² | | Glare area at 76° | | 0.000475 m ² | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 26-06-2015 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 833.91 lm | |
| LED Flux=1330lm LED Power=13W Eff=62,7% EfcLed=102lm/W EfcLum=64lm/W Ra=90 SDCM=3 L70(6K)=50000h | | | | | | | |
| C.I.E. | 99 | 100 | 100 | 100 | | D DIN 5040 | A60 |
| F UTE | -- | | | | | B NBN | BZ 1 |

Width at 50.00 % of Max Intensity

| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
|------|------|------|------|------|------|------|------|------|------|------|------|
| OA | 0.21 | 0.41 | 0.62 | 0.83 | 1.03 | OC | 0.21 | 0.41 | 0.62 | 0.83 | 1.03 |
| OB | 0.21 | 0.41 | 0.62 | 0.83 | 1.03 | OD | 0.21 | 0.41 | 0.62 | 0.83 | 1.03 |

| | Luminous Intensities [cd/klm] | | | | | | | | | |
|----|---------------------------------|---------|---------|--------|-------|-------|------|------|------|------|
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 3376.23 | 2929.89 | 1183.13 | 394.32 | 80.29 | 14.06 | 2.48 | 0.82 | 0.45 | 0.27 |
| OB | 3376.23 | 2929.89 | 1183.13 | 394.32 | 80.29 | 14.06 | 2.48 | 0.82 | 0.45 | 0.27 |
| OC | 3376.23 | 2929.89 | 1183.13 | 394.32 | 80.29 | 14.06 | 2.48 | 0.82 | 0.45 | 0.27 |
| OD | 3376.23 | 2929.89 | 1183.13 | 394.32 | 80.29 | 14.06 | 2.48 | 0.82 | 0.45 | 0.27 |

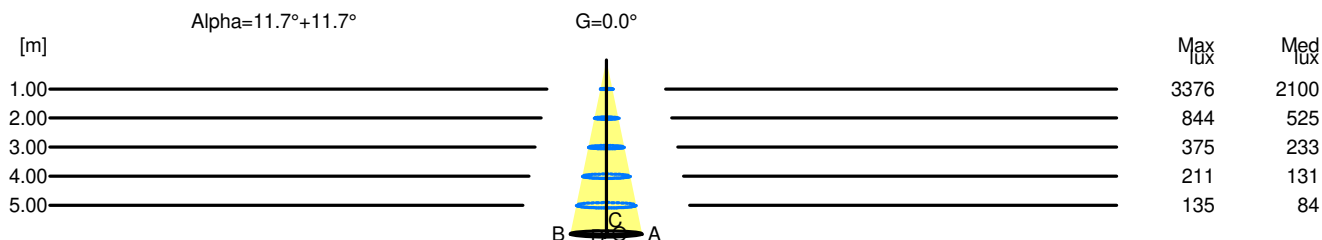

| H[m] | D[m] | Max lux | Med lux | Alpha=11.7°+11.7° | G=0.0 |
|------|------|---------|---------|-------------------|-------|
| 1.00 | 0.41 | 3376 | 2100 | | |
| 2.00 | 0.83 | 844 | 525 | | |
| 3.00 | 1.24 | 375 | 233 | | |
| 4.00 | 1.65 | 211 | 131 | | |
| 5.00 | 2.07 | 135 | 84 | | |