

## Luminaire

Code M326300  
Name EVERYTHING 80 TONDO TRIMLESS FISSO LED 2700K SPOT DEFL. BIANCO

## Measurem.

Code FTS1602672  
Name EVERYTHING 80 TONDO TRIMLESS FISSO LED 2700K SPOT DEFL. BIANCO

Luminaire Flux	993.51 lm	Luminaire Power	13.00 W	Efficacy	76.42 lm/W	Efficiency	100.00%
Sources Flux	993.51 lm	Maximum value	3667.96 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	115 mm		
Round Luminous Area		Diam.	50 mm	Height	0 mm		
Horizontal Luminous Area			0.001963 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.000475 m2
Coordinate system		CG		Symmetry Type			Rotosymmetrical
Date		07-04-2015		Maximum Gamma Angle			90
Measurement Distance		0.00		Measurement Flux			993.51 lm
LED Flux=1330lm LED Power=13W Eff=74,7% EfcLed=102lm/W EfcLum=76lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	93 98 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Diam=80mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

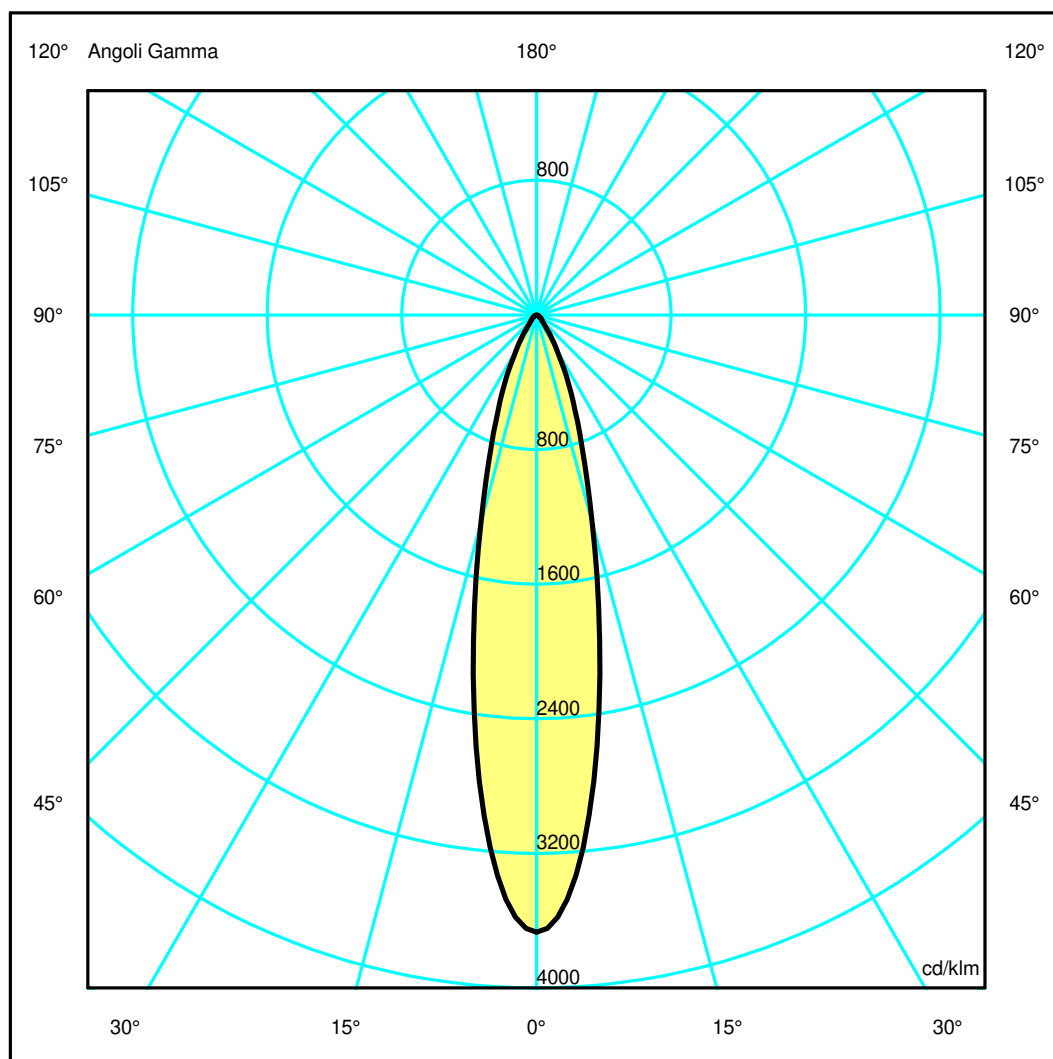

## Luminaire

Code M326300  
Name EVERYTHING 80 TONDO TRIMLESS FISSO LED 2700K SPOT DEFL. BIANCO

## Measurem.


Code FTS1602672  
Name EVERYTHING 80 TONDO TRIMLESS FISSO LED 2700K SPOT DEFL. BIANCO

Luminaire Flux	993.51 lm	Luminaire Power	13.00 W	Efficacy	76.42 lm/W	Efficiency	100.00%
Sources Flux	993.51 lm	Maximum value	3667.96 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	115 mm		
Round Luminous Area		Diam.	50 mm	Height	0 mm		
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		07-04-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		993.51 lm	
LED Flux=1330lm LED Power=13W Eff=74,7% EfcLed=102lm/W EfcLum=76lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	93 98 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.21	0.41	0.62	0.83	1.04	OC	0.21	0.41	0.62	0.83	1.04
OB	0.21	0.41	0.62	0.83	1.04	OD	0.21	0.41	0.62	0.83	1.04

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	3644.15	3154.72	1273.52	447.21	127.75	47.27	28.48	12.87	2.13	0.00
OB	3644.15	3154.72	1273.52	447.21	127.75	47.27	28.48	12.87	2.13	0.00
OC	3644.15	3154.72	1273.52	447.21	127.75	47.27	28.48	12.87	2.13	0.00
OD	3644.15	3154.72	1273.52	447.21	127.75	47.27	28.48	12.87	2.13	0.00

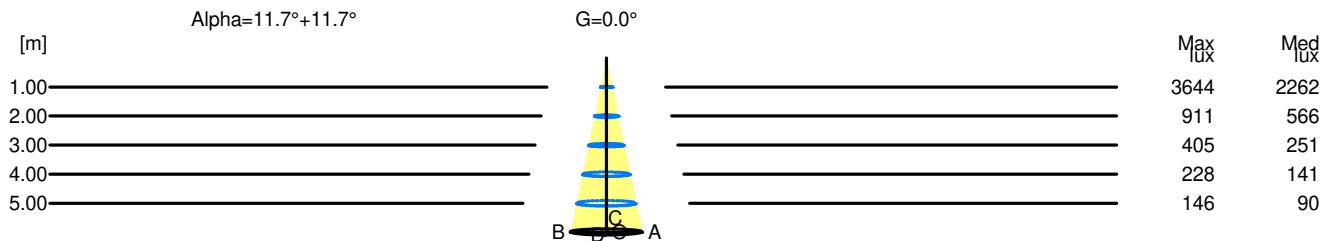

H[m]	D[m]	Max lux	Med lux	Alpha=11.7°+11.7°	G=0.0
1.00	0.41	3644	2262		
2.00	0.83	911	566		
3.00	1.24	405	251		
4.00	1.66	228	141		
5.00	2.07	146	90		