


Luminaire

Code M331000
 Name EVERYTHING 80 QUADRATO TRIMLESS FISSO LED 2700K WIDE FLOOD DEFL. METALLIZZATO


Measurement

Code FTS1602750
 Name EVERYTHING 80 QUADRATO TRIMLESS FISSO LED 2700K WIDE FLOOD DEFL. METALLIZZATO

| | | | | | | | |
|--|---|---|---|---------------|---------------|------------|--------------------|
| Luminaire Flux | 880.46 lm | Luminaire Power | 13.00 W | Efficacy | 67.73 lm/W | Efficiency | 100.00% |
| Sources Flux | 880.46 lm | Maximum value | 1123.29 cd/klm | Position | C=0.00 G=0.00 | CG | Double Symmetrical |
| Rectangular Luminaire Round Luminous Area | Length Diam. | 80 mm 50 mm | Width Height | 80 mm 0 mm | Height | 115 mm | |
| Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90° | 0.001963 m2 0.000000 m2 0.000000 m2 | Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76° | 0.000000 m2 0.000000 m2 0.000475 m2 | | | | |
| Coordinate system Date Measurement Distance | CG 09-04-2015 0.00 | Symmetry Type Maximum Gamma Angle Measurement Flux | Double Symmetrical 90 880.46 lm | | | | |
| LED Flux=1330lm LED Power=13W Eff=66,2% EfcLed=102lm/W EfcLum=68lm/W Ra=90 SDCM=3 L70(6K)=50000h | | | | | | | |
| C.I.E. F UTE | 89 100 100 100 100 1.00 A | D DIN 5040 B NBN | A60 BZ 1 | | | | |

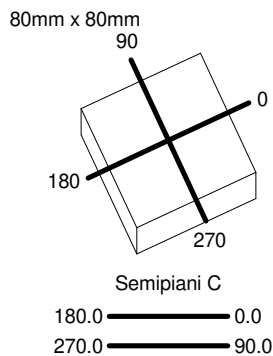

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

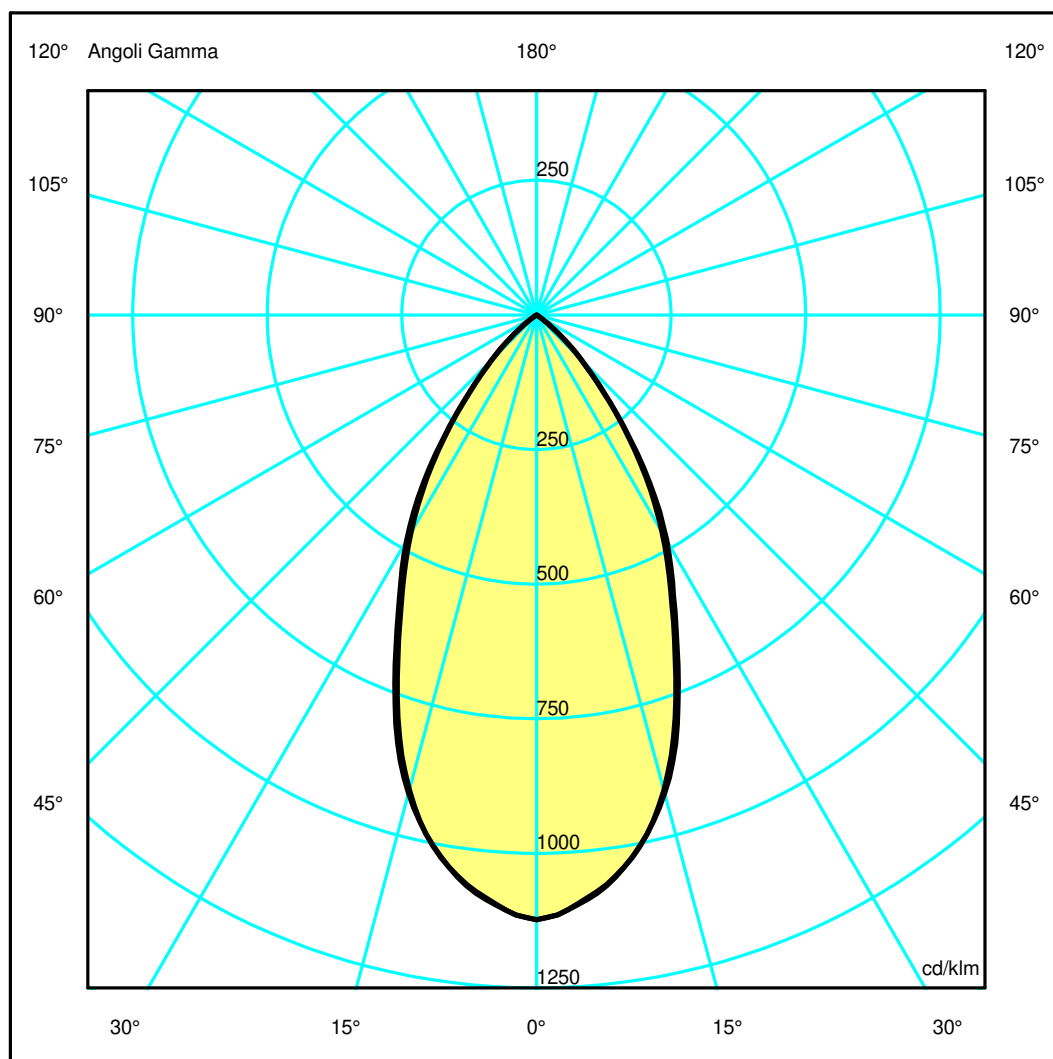

Luminaire

Code M331000
Name EVERYTHING 80 QUADRATO TRIMLESS FISSO LED 2700K WIDE FLOOD DEFL. METALLIZZATO

Measurerm.


Code FTS1602750
Name EVERYTHING 80 QUADRATO TRIMLESS FISSO LED 2700K WIDE FLOOD DEFL. METALLIZZATO

| | | | | | | | |
|--|------------------------------|---|----------------|---|---------------|---|--------------------|
| Luminaire Flux | 880.46 lm | Luminaire Power | 13.00 W | Efficacy | 67.73 lm/W | Efficiency | 100.00% |
| Sources Flux | 880.46 lm | Maximum value | 1123.29 cd/klm | Position | C=0.00 G=0.00 | CG | Double Symmetrical |
| Rectangular Luminaire Round Luminous Area | | Length Diam. | 80 mm 50 mm | Width Height | 80 mm 0 mm | Height | 115 mm |
| Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90° | | 0.001963 m2 0.000000 m2 0.000000 m2 | | Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76° | | 0.000000 m2 0.000000 m2 0.000475 m2 | |
| Coordinate system Date Measurement Distance | | CG 09-04-2015 0.00 | | Symmetry Type Maximum Gamma Angle Measurement Flux | | Double Symmetrical 90 880.46 lm | |
| LED Flux=1330lm LED Power=13W Eff=66,2% EfcLed=102lm/W EfcLum=68lm/W Ra=90 SDCM=3 L70(6K)=50000h | | | | | | | |
| C.I.E. F UTE | 89 100 100 100 100 1.00 A | | | D DIN 5040 B NBN | A60 BZ 1 | | |

Width at 50.00 % of Max Intensity

| | | | | | | | | | | | |
|------|------|------|------|------|------|------|------|------|------|------|------|
| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
| OA | 0.50 | 1.01 | 1.51 | 2.02 | 2.52 | OC | 0.49 | 0.99 | 1.48 | 1.97 | 2.47 |
| OB | 0.50 | 1.01 | 1.51 | 2.02 | 2.52 | OD | 0.49 | 0.99 | 1.48 | 1.97 | 2.47 |

| | | | | | | | | | | |
|----|--------------------------------|--------|--------|--------|--------|--------|-------|------|------|------|
| | Luminous Intensities [cd/klm] | | | | | | | | | |
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 989.01 | 956.34 | 809.58 | 535.66 | 305.51 | 104.20 | 12.72 | 0.00 | 0.00 | 0.00 |
| OB | 989.01 | 956.34 | 809.58 | 535.66 | 305.51 | 104.20 | 12.72 | 0.00 | 0.00 | 0.00 |
| OC | 989.01 | 959.05 | 804.13 | 524.32 | 296.78 | 102.75 | 13.27 | 0.00 | 0.00 | 0.00 |
| OD | 989.01 | 959.05 | 804.13 | 524.32 | 296.78 | 102.75 | 13.27 | 0.00 | 0.00 | 0.00 |

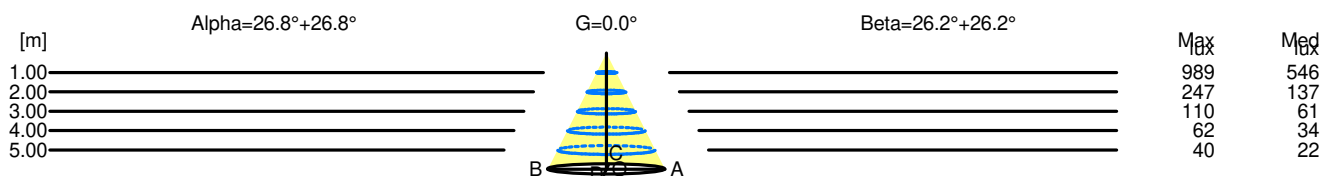

| H[m] | D[m] | Max lux | Med lux | Alpha=26.8°+26.8° | G=0.0 |
|------|------|---------|---------|-------------------|-------|
| 1.00 | 1.01 | 989 | 546 | | |
| 2.00 | 2.02 | 247 | 137 | | |
| 3.00 | 3.03 | 110 | 61 | | |
| 4.00 | 4.04 | 62 | 34 | | |
| 5.00 | 5.04 | 40 | 22 | | |

| H[m] | D[m] | Max lux | Med lux | Beta=26.2°+26.2° | G=0.0 |
|------|------|---------|---------|------------------|-------|
| 1.00 | 0.99 | 989 | 546 | | |
| 2.00 | 1.97 | 247 | 137 | | |
| 3.00 | 2.96 | 110 | 61 | | |
| 4.00 | 3.94 | 62 | 34 | | |
| 5.00 | 4.93 | 40 | 22 | | |