

Luminaire

Code M331005
 Name EVERYTHING 80 QUADRATO TRIMLESS ORIENTABILE LED 2700K WIDE FLOOD DEFL. METALLIZZATO

Measurement


Code FTS1602751
 Name EVERYTHING 80 QUADRATO TRIMLESS ORIENTABILE LED 2700K WIDE FLOOD DEFL. METALLIZZATO

Luminaire Flux	880.46 lm	Luminaire Power	13.00 W	Efficacy	67.73 lm/W	Efficiency	100.00%
Sources Flux	880.46 lm	Maximum value	1123.29 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.001963 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000475 m2				
Coordinate system Date Measurement Distance	CG 09-04-2015 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Double Symmetrical 90 880.46 lm				


LED Flux=1330lm LED Power=13W Eff=66,2% EfcLed=102lm/W EfcLum=68lm/W Ra=90 SDCM=3 L70(6K)=50000h

C.I.E. 89 100 100 100 100
 F UTE 1.00 A

D DIN 5040
 B NBN
 A60
 BZ 1

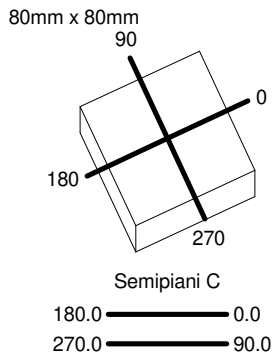

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

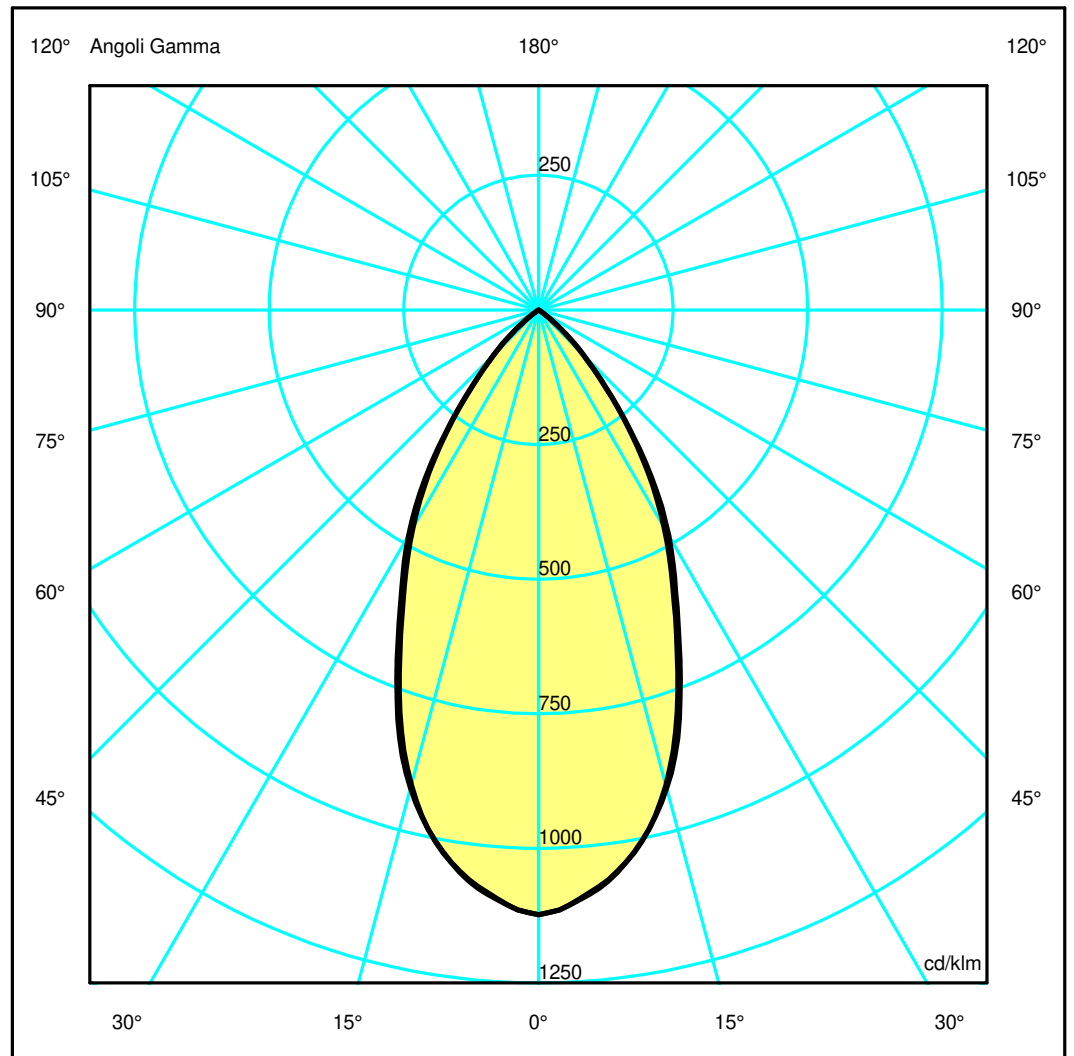

Luminaire

Code M331005
Name EVERYTHING 80 QUADRATO TRIMLESS ORIENTABILE LED 2700K WIDE FLOOD DEFL. METALLIZZATO

Measurment.


Code FTS1602751
Name EVERYTHING 80 QUADRATO TRIMLESS ORIENTABILE LED 2700K WIDE FLOOD DEFL. METALLIZZATO

Luminaire Flux	880.46 lm	Luminaire Power	13.00 W	Efficacy	67.73 lm/W	Efficiency	100.00%
Sources Flux	880.46 lm	Maximum value	1123.29 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.001963 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000475 m2				
Coordinate system Date Measurement Distance	CG 09-04-2015 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Double Symmetrical 90 880.46 lm				
LED Flux=1330lm LED Power=13W Eff=66,2% EfcLed=102lm/W EfcLum=68lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	89 100 100 100 100 1.00 A	D DIN 5040 B NBN	A60 BZ 1				

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.50	1.01	1.51	2.02	2.52	OC	0.49	0.99	1.48	1.97	2.47
OB	0.50	1.01	1.51	2.02	2.52	OD	0.49	0.99	1.48	1.97	2.47

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	989.01	956.34	809.58	535.66	305.51	104.20	12.72	0.00	0.00	0.00
OB	989.01	956.34	809.58	535.66	305.51	104.20	12.72	0.00	0.00	0.00
OC	989.01	959.05	804.13	524.32	296.78	102.75	13.27	0.00	0.00	0.00
OD	989.01	959.05	804.13	524.32	296.78	102.75	13.27	0.00	0.00	0.00

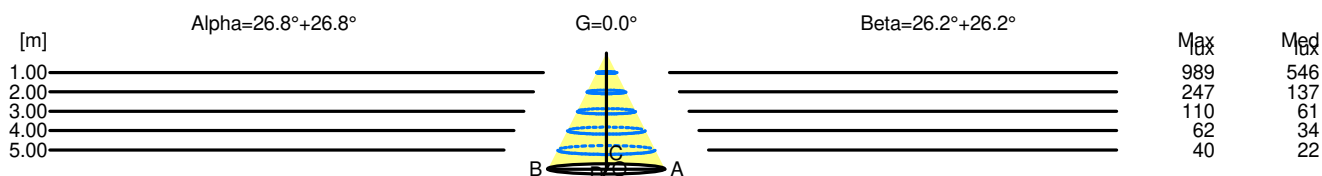

H[m]	D[m]	Max lux	Med lux	Alpha=26.8°+26.8°	G=0.0	
1.00	1.01	989	546			
2.00	2.02	247	137			
3.00	3.03	110	61			
4.00	4.04	62	34			
5.00	5.04	40	22			

H[m]	D[m]	Max lux	Med lux	Beta=26.2°+26.2°	G=0.0	
1.00	0.99	989	546			
2.00	1.97	247	137			
3.00	2.96	110	61			
4.00	3.94	62	34			
5.00	4.93	40	22			