

## Luminaire

Code M279605  
 Name EVERYTHING 80 TONDO TRIMLESS ORIENTABILE LED 3000K WIDE FLOOD DEFL. METALLIZZATO

## Measurement

Code FTS1602158  
 Name EVERYTHING 80 TONDO TRIMLESS ORIENTABILE LED 3000K WIDE FLOOD DEFL. METALLIZZATO

Luminaire Flux	892.38 lm	Luminaire Power	13.00 W	Efficacy	68.64 lm/W	Efficiency	100.00%
Sources Flux	892.38 lm	Maximum value	1395.80 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	115 mm		
Round Luminous Area		Diam.	50 mm	Height	0 mm		
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		29-06-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		892.38 lm	
LED Flux=1390lm LED Power=13W Eff=64,2% EfcLed=107lm/W EfcLum=69lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	91 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		


Diam=80mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
 DLOR 100.00 %  
 RN 0.00 %

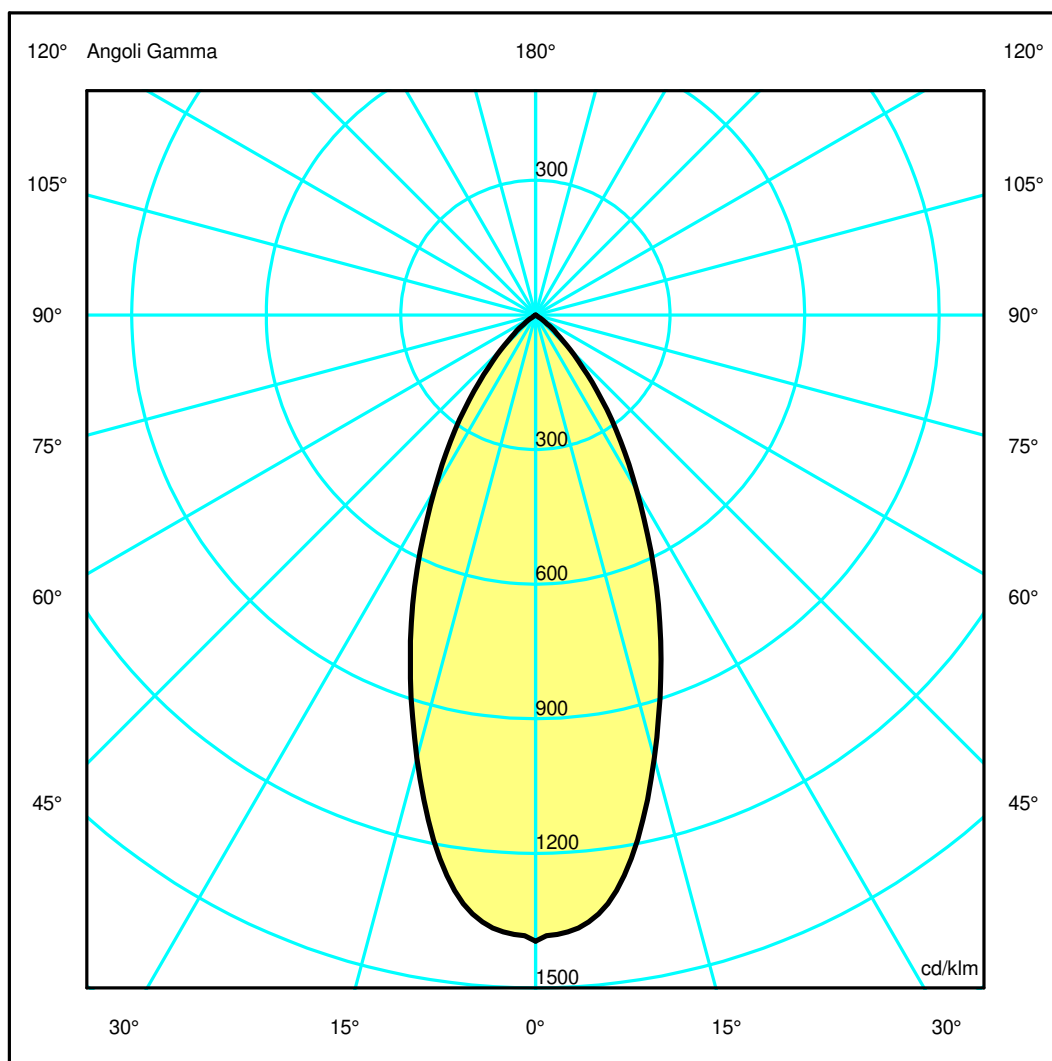

## Luminaire

Code M279605  
 Name EVERYTHING 80 TONDO TRIMLESS ORIENTABILE LED 3000K WIDE FLOOD DEFL. METALLIZZATO

## Measurement


Code FTS1602158  
 Name EVERYTHING 80 TONDO TRIMLESS ORIENTABILE LED 3000K WIDE FLOOD DEFL. METALLIZZATO

Luminaire Flux	892.38 lm	Luminaire Power	13.00 W	Efficacy	68.64 lm/W	Efficiency	100.00%
Sources Flux	892.38 lm	Maximum value	1395.80 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	115 mm		
Round Luminous Area		Diam.	50 mm	Height	0 mm		
Horizontal Luminous Area		0.001963 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.000475 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		29-06-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		892.38 lm	
LED Flux=1390lm LED Power=13W Eff=64,2% EfcLed=107lm/W EfcLum=69lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	91 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.43	0.85	1.28	1.70	2.13	OC	0.43	0.85	1.28	1.70	2.13
OB	0.43	0.85	1.28	1.70	2.13	OD	0.43	0.85	1.28	1.70	2.13

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	1245.59	1211.84	912.24	557.74	280.09	97.79	18.04	0.64	0.37	0.31
OB	1245.59	1211.84	912.24	557.74	280.09	97.79	18.04	0.64	0.37	0.31
OC	1245.59	1211.84	912.24	557.74	280.09	97.79	18.04	0.64	0.37	0.31
OD	1245.59	1211.84	912.24	557.74	280.09	97.79	18.04	0.64	0.37	0.31

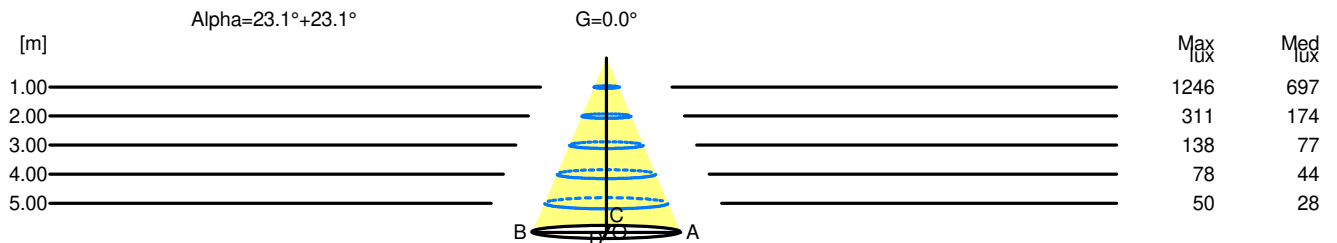

H[m]	D[m]	Max lux	Med lux	Alpha=23.1°+23.1°	G=0.0
1.00	0.85	1246	697		
2.00	1.70	311	174		
3.00	2.56	138	77		
4.00	3.41	78	44		
5.00	4.26	50	28		