

Luminaire

Code M327800
 Name EVERYTHING 80 QUADRATO TRIMLESS FISSO LED 2700K SPOT DEFL. NERO

Measurement

Code FTS1602722
 Name EVERYTHING 80 QUADRATO TRIMLESS FISSO LED 2700K SPOT DEFL. NERO

Luminaire Flux	813.96 lm	Luminaire Power	13.00 W	Efficacy	62.61 lm/W	Efficiency	100.00%
Sources Flux	813.96 lm	Maximum value	3972.52 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.001963 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000475 m2				
Coordinate system Date Measurement Distance	CG 30-06-2015 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 90 813.96 lm				
LED Flux=1330lm LED Power=13W Eff=61,2% EfcLed=102lm/W EfcLum=63lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	99 100 100 100 100 --	D DIN 5040 B NBN	A60 BZ 1				


80mm x 80mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
 DLOR100.00 %
 RN 0.00 %

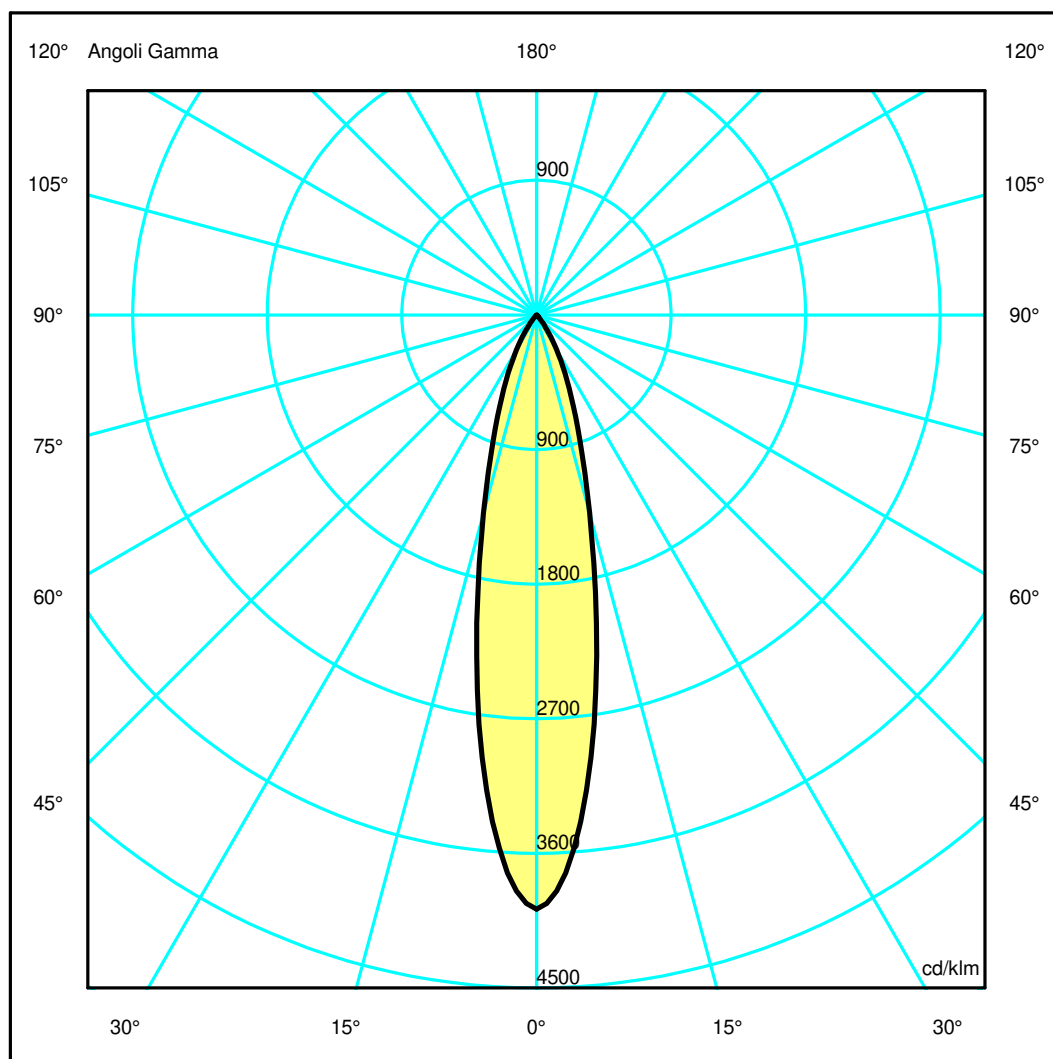

Luminaire

Code M327800
Name EVERYTHING 80 QUADRATO TRIMLESS FISSO LED 2700K SPOT DEFL. NERO

Measurem.


Code FTS1602722
Name EVERYTHING 80 QUADRATO TRIMLESS FISSO LED 2700K SPOT DEFL. NERO

Luminaire Flux	813.96 lm	Luminaire Power	13.00 W	Efficacy	62.61 lm/W	Efficiency	100.00%
Sources Flux	813.96 lm	Maximum value	3972.52 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area		Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.001963 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000475 m2	
Coordinate system Date Measurement Distance		CG 30-06-2015 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 90 813.96 lm	
LED Flux=1330lm LED Power=13W Eff=61,2% EfcLed=102lm/W EfcLum=63lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	99 100 100 100 100 --			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.20	0.41	0.61	0.82	1.02	OC	0.20	0.41	0.61	0.82	1.02
OB	0.20	0.41	0.61	0.82	1.02	OD	0.20	0.41	0.61	0.82	1.02

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3233.47	2766.85	1115.61	392.60	100.56	15.21	2.49	0.58	0.33	0.11
OB	3233.47	2766.85	1115.61	392.60	100.56	15.21	2.49	0.58	0.33	0.11
OC	3233.47	2766.85	1115.61	392.60	100.56	15.21	2.49	0.58	0.33	0.11
OD	3233.47	2766.85	1115.61	392.60	100.56	15.21	2.49	0.58	0.33	0.11

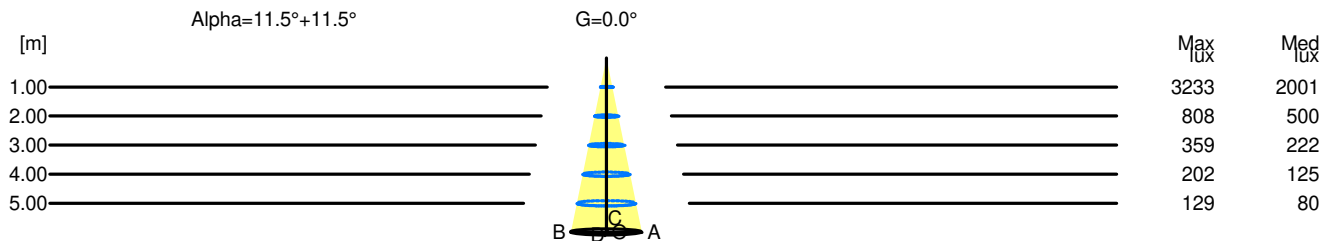

H[m]	D[m]	Max lux	Med lux	Alpha=11.5°+11.5°	G=0.0
1.00	0.41	3233	2001		
2.00	0.82	808	500		
3.00	1.22	359	222		
4.00	1.63	202	125		
5.00	2.04	129	80		