

Luminaire

Code M330905
 Name EVERYTHING 80 QUADRATO TRIMLESS ORIENTABILE LED 2700K FLOOD DEFL. METALLIZZATO

Measurement

Code FTS1602733
 Name EVERYTHING 80 QUADRATO TRIMLESS ORIENTABILE LED 2700K FLOOD DEFL. METALLIZZATO

Luminaire Flux	974.89 lm	Luminaire Power	13.00 W	Efficacy	74.99 lm/W	Efficiency	100.00%
Sources Flux	974.89 lm	Maximum value	2741.50 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.001963 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000475 m2				
Coordinate system Date Measurement Distance	CG 09-04-2015 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 90 974.89 lm				

LED Flux=1330lm LED Power=13W Eff=73,3% EfcLed=102lm/W EfcLum=75lm/W Ra=90 SDCM=3 L70(6K)=50000h

C.I.E. 97 100 100 100 100
 F UTE --

D DIN 5040
 B NBN
 A60
 BZ 1


80mm x 80mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

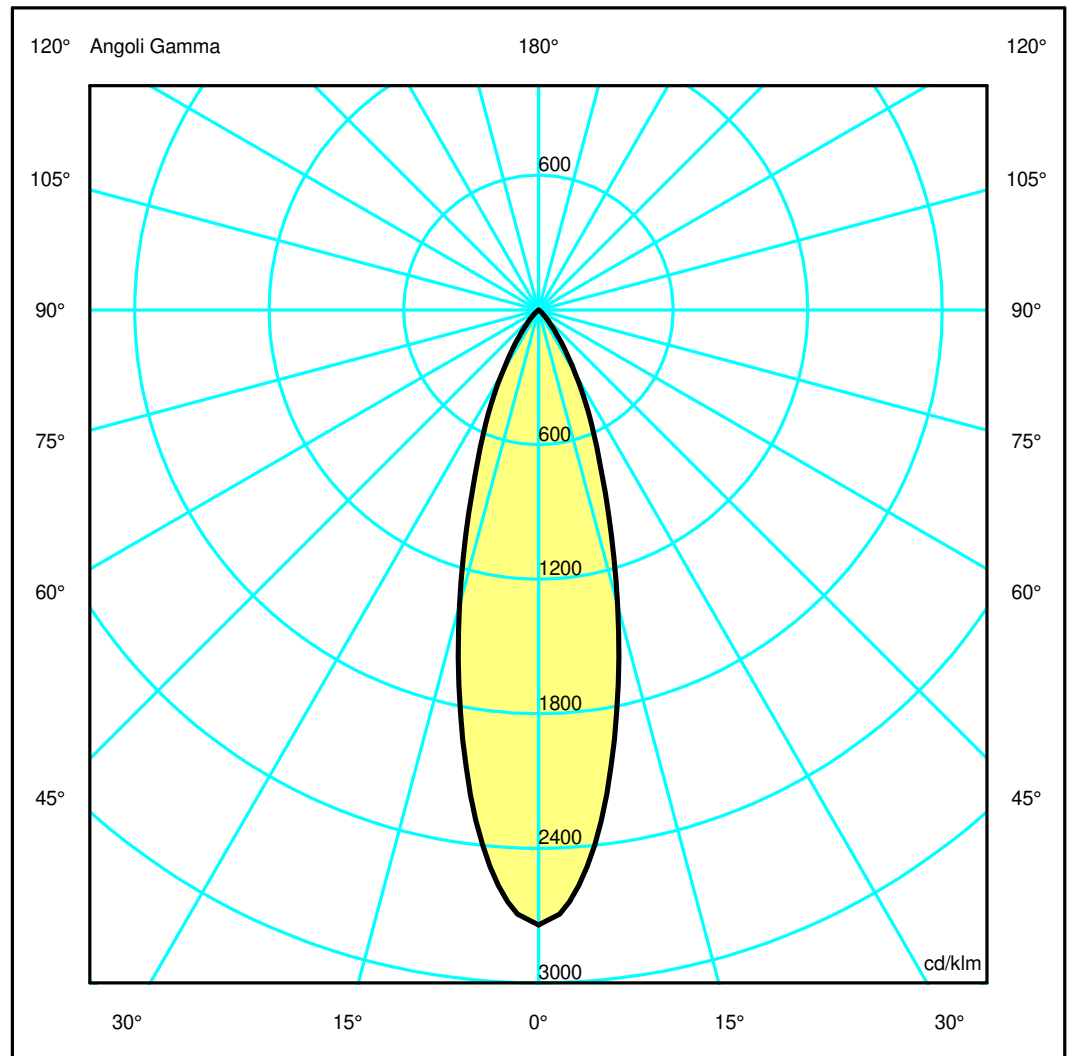

Luminaire

Code M330905
Name EVERYTHING 80 QUADRATO TRIMLESS ORIENTABILE LED 2700K FLOOD DEFL. METALLIZZATO

Measurement


Code FTS1602733
Name EVERYTHING 80 QUADRATO TRIMLESS ORIENTABILE LED 2700K FLOOD DEFL. METALLIZZATO

Luminaire Flux	974.89 lm	Luminaire Power	13.00 W	Efficacy	74.99 lm/W	Efficiency	100.00%
Sources Flux	974.89 lm	Maximum value	2741.50 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.001963 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000475 m2				
Coordinate system Date Measurement Distance	CG 09-04-2015 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 90 974.89 lm				
LED Flux=1330lm LED Power=13W Eff=73,3% EfcLed=102lm/W EfcLum=75lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	97 100 100 100 100 --	D DIN 5040 B NBN	A60 BZ 1				

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.27	0.53	0.80	1.07	1.33	OC	0.27	0.53	0.80	1.07	1.33
OB	0.27	0.53	0.80	1.07	1.33	OD	0.27	0.53	0.80	1.07	1.33

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2672.66	2426.52	1327.63	542.47	171.45	39.55	1.23	0.00	0.00	0.00
OB	2672.66	2426.52	1327.63	542.47	171.45	39.55	1.23	0.00	0.00	0.00
OC	2672.66	2426.52	1327.63	542.47	171.45	39.55	1.23	0.00	0.00	0.00
OD	2672.66	2426.52	1327.63	542.47	171.45	39.55	1.23	0.00	0.00	0.00

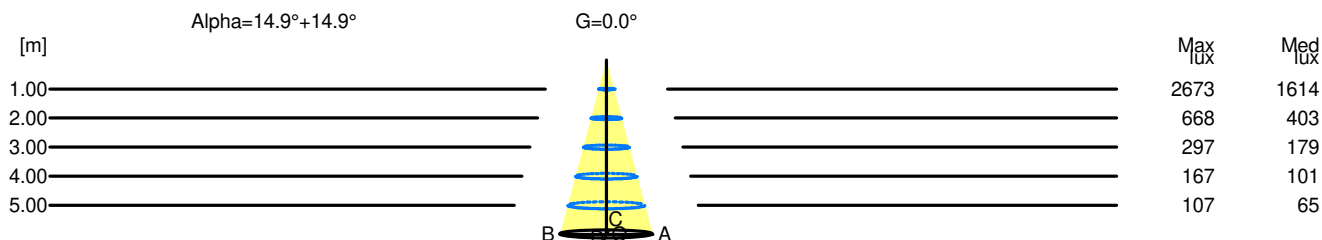

H[m]	D[m]	Max lux	Med lux	Alpha=14.9°+14.9°	G=0.0
1.00	0.53	2673	1614		
2.00	1.07	668	403		
3.00	1.60	297	179		
4.00	2.13	167	101		
5.00	2.66	107	65		