



Luminaire
 Code FW12001APP
 Name DIFFUSED LINEAR 1200 FUNIVIA 940 BCO

Measurement
 Code FTS2300044-A
 Name DIFFUSED LINEAR 1200 FUNIVIA 940 BCO

Luminaire Flux	2455 lm	Luminaire Power	26.0 W	Efficacy	94.423 lm/W	Efficiency	100.00%
Source Flux	2455 lm	Maximum value	350.51 cd/klm	Position	C=60.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1200 mm	Width	20 mm	Height	20 mm
Rectangular Luminous Area		Length	1176 mm	Width	18 mm	Height	0 mm
Horizontal Luminous Area		0.021168 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.005121 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		22-03-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2455 lm	

LED Flux=3859lm LED Power=24W Eff=64% EfcLed=163lm/W EfcLum=94lm/W CCT=4000K Ra=80 SDCM=2 L70(19k)=116750h

C.I.E. 47 79 96 100 100 D DIN 5040 A30
 F UTE 1.00 E B NBN BZ 5 / 1.25 / BZ 4

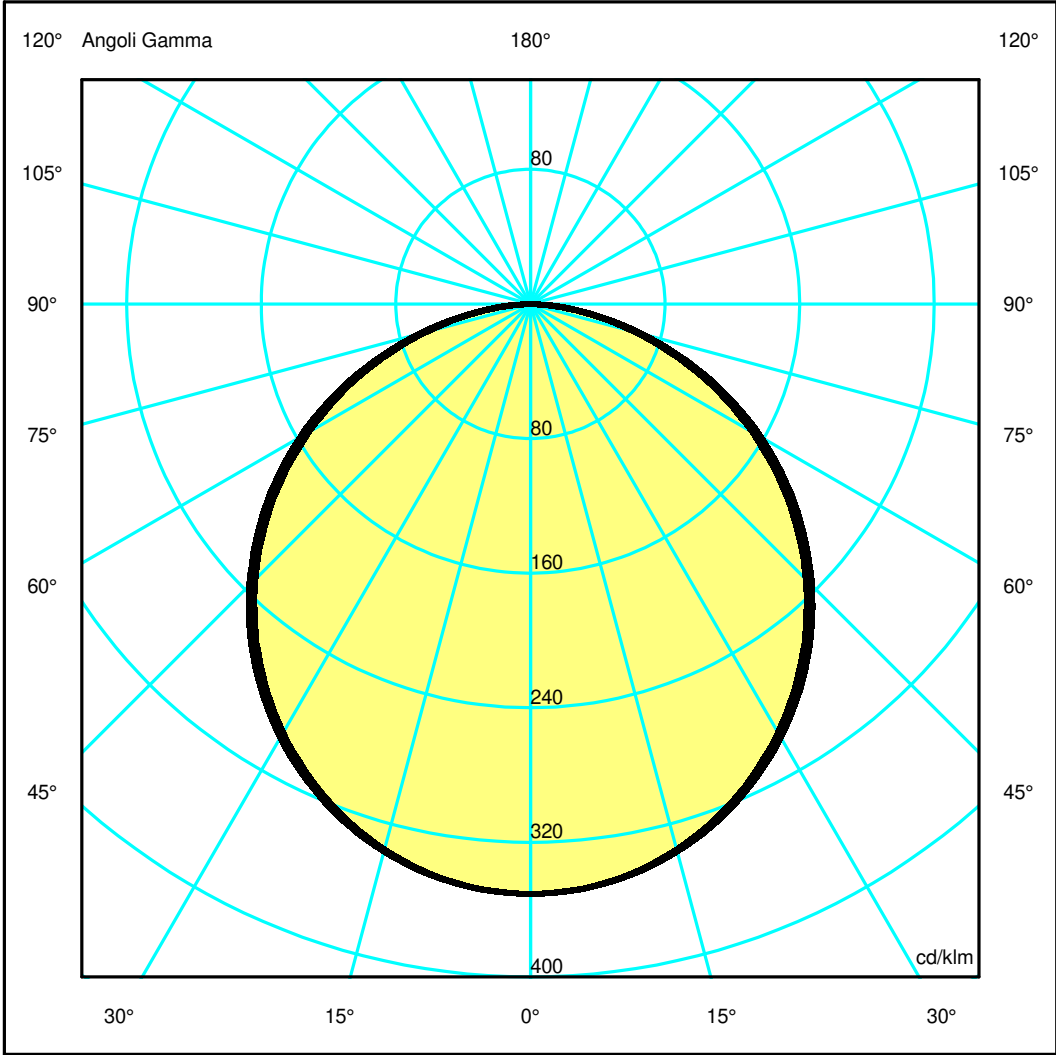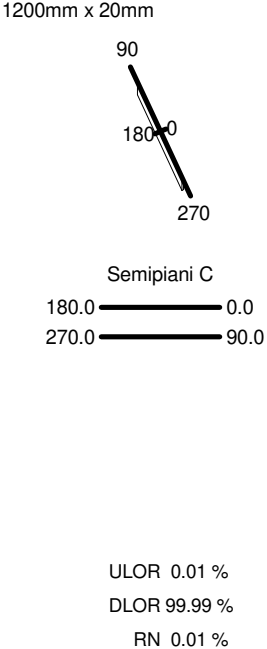

Luminaire

Code FW12001APP
Name DIFFUSED LINEAR 1200 FUNIVIA 940 BCO

Measurerm.


Code FTS2300044-A
Name DIFFUSED LINEAR 1200 FUNIVIA 940 BCO

Luminaire Flux	2455 lm	Luminaire Power	26.0 W	Efficacy	94.423 lm/W	Efficiency	100.00%
Source Flux	2455 lm	Maximum value	350.51 cd/klm	Position	C=60.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire Rectangular Luminous Area	Length Length	1200 mm 1176 mm	Width Width	20 mm 18 mm	Height Height	20 mm 0 mm	
Horizontal Luminous Area	0.021168 m ²	Emitting area on Plane 180°	0.000000 m ²	Emitting area on Plane 270°	0.000000 m ²	Emitting area on Plane 90°	0.005121 m ²
Coordinate system	CG	Symmetry Type	Double Symmetrical	Date	22-03-2024	Maximum Gamma Angle	180
Measurement Distance	0.00	Measurement Flux	2455 lm	LED Flux=3859lm LED Power=24W Eff=64% EfcLed=163lm/W EfcLum=94lm/W CCT=4000K Ra=80 SDCM=2 L70(19k)=116750h			
C.I.E.	47 79 96 100 100	D DIN 5040	A30				
F UTE	1.00 E	B NBN	BZ 5 / 1.25 / BZ 4				

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.48	2.96	4.43	5.91	7.39	OC	1.54	3.07	4.61	6.15	7.68
OB	1.48	2.96	4.43	5.91	7.39	OD	1.54	3.07	4.61	6.15	7.68

Luminous Intensities [cd/klm]										
	0	5	15	25	35	45	55	65	75	85
OA	860.47	856.40	824.06	762.39	675.78	568.31	441.61	301.91	158.14	35.40
OB	860.47	856.40	824.06	762.39	675.78	568.31	441.61	301.91	158.14	35.40
OC	860.47	856.92	826.87	769.13	686.15	580.67	455.84	316.58	167.76	42.79
OD	860.47	856.92	826.87	769.13	686.15	580.67	455.84	316.58	167.76	42.79

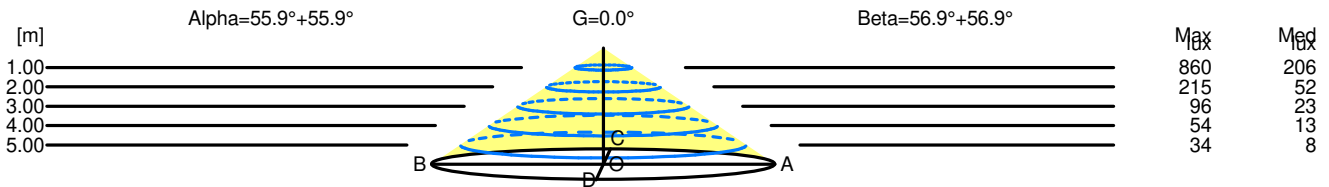

H[m]	D[m]	Max lux	Med lux	Alpha=55.9°+55.9°		G=0.0	
1.00	2.96	860	206				
2.00	5.91	215	52				
3.00	8.87	96	23				
4.00	11.82	54	13				
5.00	14.78	34	8				

H[m]	D[m]	Max lux	Med lux	Beta=56.9°+56.9°		G=0.0	
1.00	3.07	860	206				
2.00	6.15	215	52				
3.00	9.22	96	23				
4.00	12.29	54	13				
5.00	15.36	34	8				