

## Luminaire

Code BM00601  
Name HOY SPOT SEMINC ORIENT 2700K WF BCO

## Measurerm.

Code FTS2000237  
Name HOY SPOT SEMINC ORIENT 2700K WF BCO

Luminaire Flux	1914.65 lm	Luminaire Power	19.00 W	Efficacy	100.77 lm/W	Efficiency	100.00%
Sources Flux	1914.65 lm	Maximum value	1307.01 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	90 mm	Height	110 mm		
Round Luminous Area		Diam.	74 mm	Height	0 mm		
Horizontal Luminous Area		0.004301 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001040 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		27-04-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1914.65 lm	
LED Flux=2253lm LED Power=19W Eff=85% EfcLed=118lm/W EfcLum=101lm/W CCT=2700 Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E.	92 99 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		


Diam=90mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
DLOR 100.00 %  
RN 0.00 %

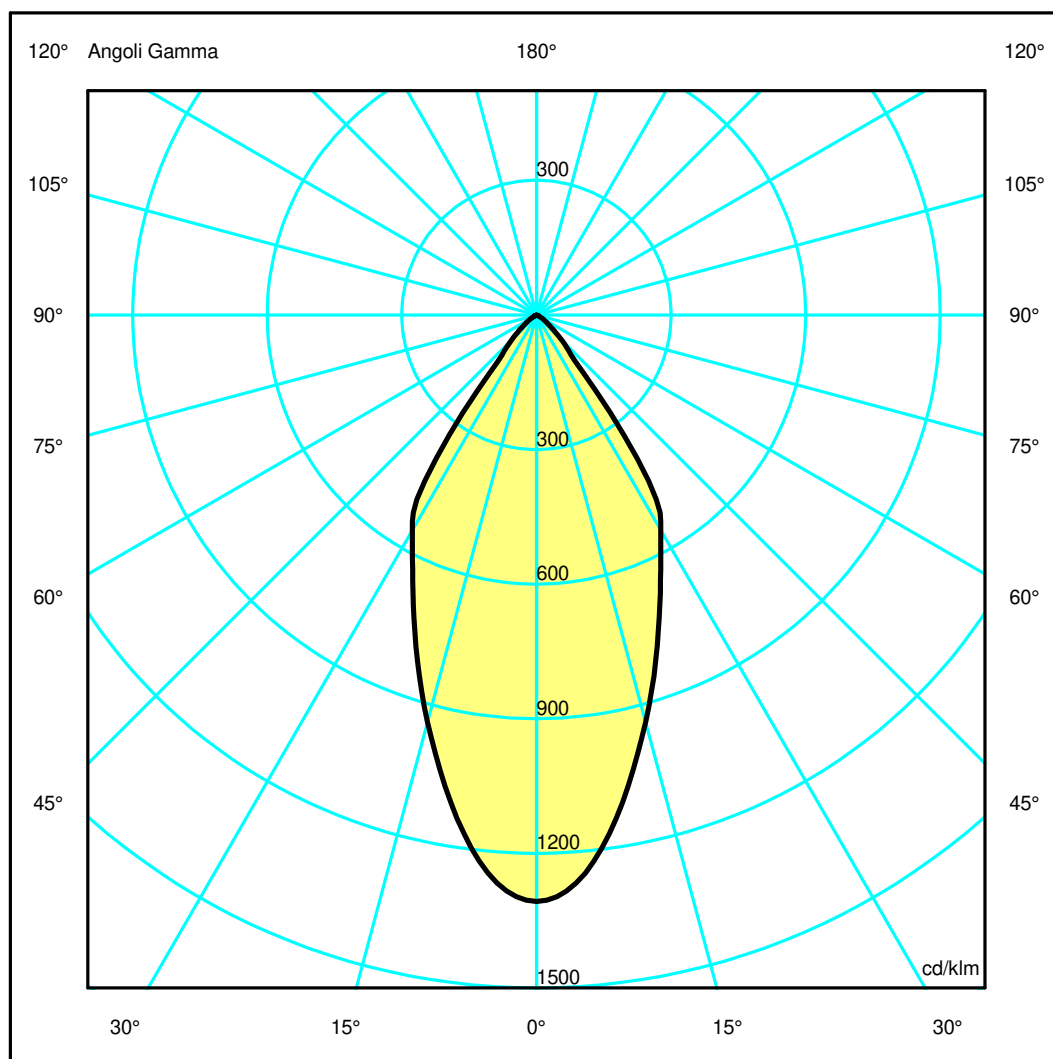

## Luminaire

Code BM00601  
Name HOY SPOT SEMINC ORIENT 2700K WF BCO

## Measurement


Code FTS2000237  
Name HOY SPOT SEMINC ORIENT 2700K WF BCO

Luminaire Flux	1914.65 lm	Luminaire Power	19.00 W	Efficacy	100.77 lm/W	Efficiency	100.00%
Sources Flux	1914.65 lm	Maximum value	1307.01 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	90 mm	Height	110 mm		
Round Luminous Area		Diam.	74 mm	Height	0 mm		
Horizontal Luminous Area		0.004301 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001040 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		27-04-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1914.65 lm	
LED Flux=2253lm LED Power=19W Eff=85% EfcLed=118lm/W EfcLum=101lm/W CCT=2700 Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E.	92 99 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.47	0.93	1.40	1.86	2.33	OC	0.47	0.93	1.40	1.86	2.33
OB	0.47	0.93	1.40	1.86	2.33	OD	0.47	0.93	1.40	1.86	2.33

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	2502.48	2389.54	1797.76	1250.86	748.93	155.40	45.68	12.65	2.65	0.16
OB	2502.48	2389.54	1797.76	1250.86	748.93	155.40	45.68	12.65	2.65	0.16
OC	2502.48	2389.54	1797.76	1250.86	748.93	155.40	45.68	12.65	2.65	0.16
OD	2502.48	2389.54	1797.76	1250.86	748.93	155.40	45.68	12.65	2.65	0.16

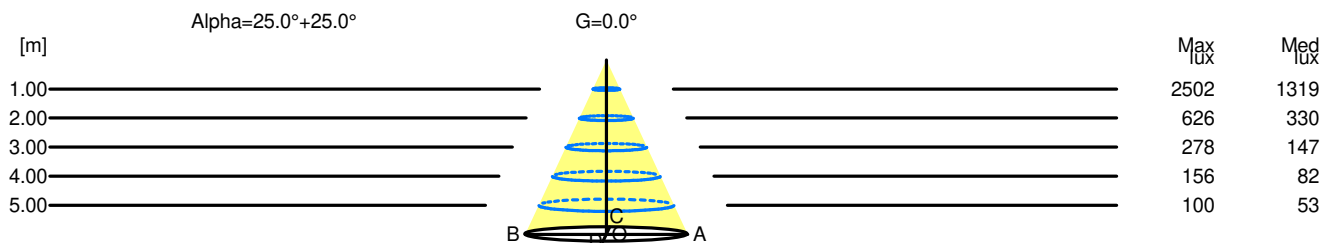

H[m]	D[m]	Max lux	Med lux	Alpha=25.0°+25.0°	G=0.0
1.00	0.93	2502	1319		
2.00	1.86	626	330		
3.00	2.80	278	147		
4.00	3.73	156	82		
5.00	4.66	100	53		