

Luminaire


Code 1001W30A
Name VEA F FOCUS 2700K BLACK GREY

Measurement

Code FTS2600191
Name VEA F FOCUS 2700K BLACK GREY

Luminaire Flux	705 lm	Luminaire Power	13.0 W	Efficacy	54.231 lm/W	Efficiency	100.00%
Source Flux	705 lm	Maximum value	1271.84 cd/klm	Position	C=0.00 G=27.00	CG	Rotosymmetrical
Round Luminaire		Diam.	170 mm	Height	162 mm		
Round Luminous Area		Diam.	100 mm	Height	0 mm		
Horizontal Luminous Area		0.007854 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001900 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		29-04-2026		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		705 lm	
LED Flux=1366lm LED Power=9.3W Eff=51.6% EfcLed=147lm/W EfcLum=54.2lm/W CCT=2700K Ra=90 R9=45 SDCM=2 L70(12k)>66000h							
C.I.E.	98	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1


Diam=170mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR100.00 %
RN 0.00 %

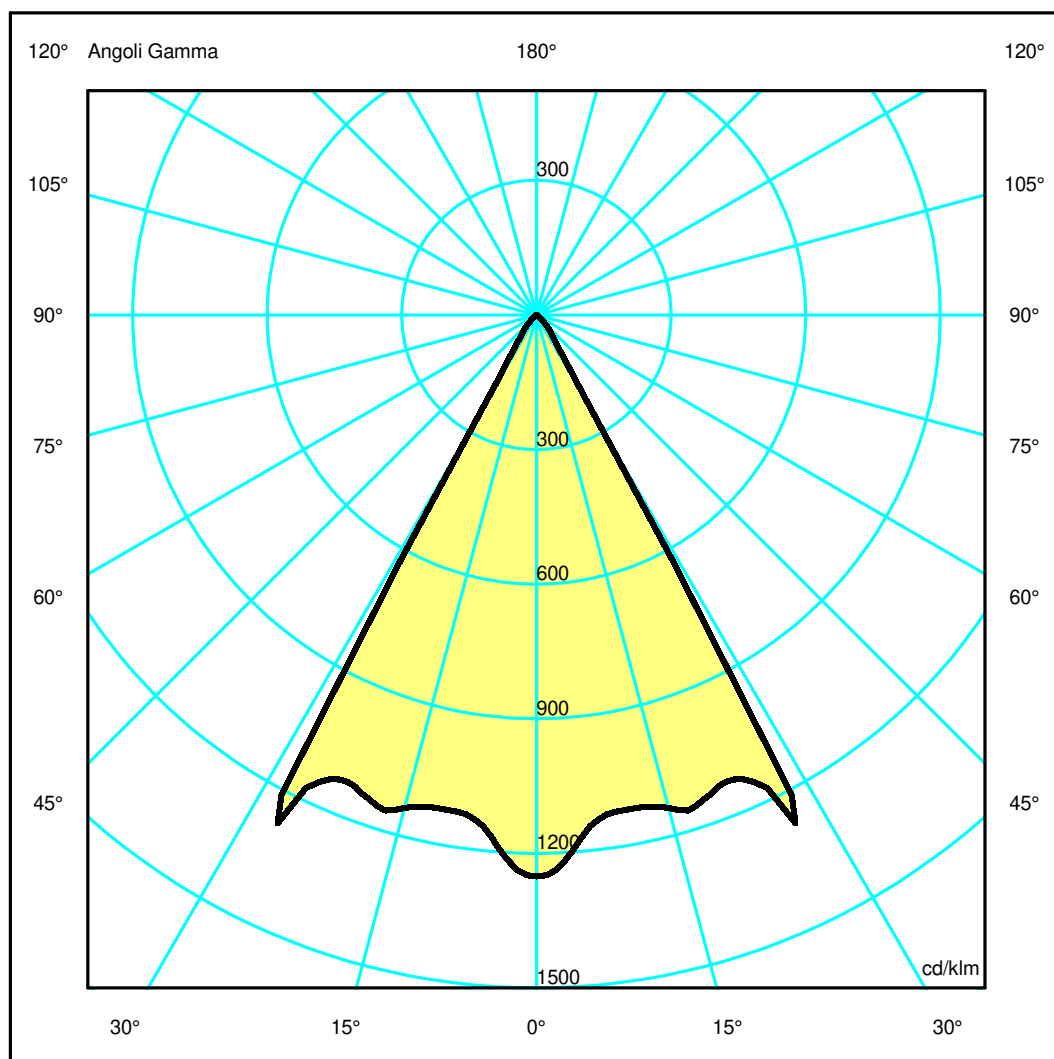

Luminaire

Code 1001W30A
Name VEA F FOCUS 2700K BLACK GREY

Measurem.


Code FTS2600191
Name VEA F FOCUS 2700K BLACK GREY

Luminaire Flux	705 lm	Luminaire Power	13.0 W	Efficacy	54.231 lm/W	Efficiency	100.00%
Source Flux	705 lm	Maximum value	1271.84 cd/klm	Position	C=0.00 G=27.00	CG	Rotosymmetrical
Round Luminaire		Diam.	170 mm	Height	162 mm		
Round Luminous Area		Diam.	100 mm	Height	0 mm		
Horizontal Luminous Area		0.007854 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001900 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		29-04-2026		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		705 lm	
LED Flux=1366lm LED Power=9.3W Eff=51.6% EfcLed=147lm/W EfcLum=54.2lm/W CCT=2700K Ra=90 R9=45 SDCM=2 L70(12k)>66000h							
C.I.E.	98	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.55	1.11	1.66	2.22	2.77	OC	0.55	1.11	1.66	2.22	2.77
OB	0.55	1.11	1.66	2.22	2.77	OD	0.55	1.11	1.66	2.22	2.77

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	882.43	822.58	801.73	809.56	51.45	18.42	2.81	0.61	0.34	0.25
OB	882.43	822.58	801.73	809.56	51.45	18.42	2.81	0.61	0.34	0.25
OC	882.43	822.58	801.73	809.56	51.45	18.42	2.81	0.61	0.34	0.25
OD	882.43	822.58	801.73	809.56	51.45	18.42	2.81	0.61	0.34	0.25

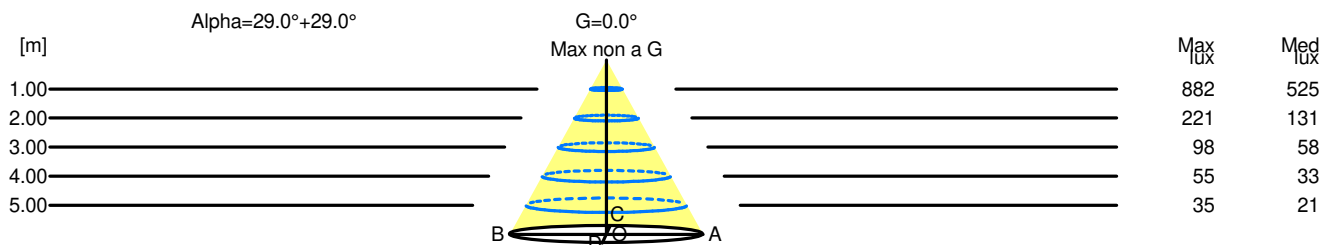

H[m]	D[m]	Max lux	Med lux	Alpha=29.0°+29.0°	G=0.0 Max non a G
1.00	1.11	882	525		
2.00	2.22	221	131		
3.00	3.33	98	58		
4.00	4.43	55	33		
5.00	5.54	35	21		