

## Luminaire


Code AT19301+AT09505  
 Name A.39 SOSP DIR\IND 1184MM 840 ND BCO

## Measurum.

Code FTS1801069-A  
 Name A.39 SOSP DIR\IND 1184MM 840 ND BCO

Luminaire Flux	4537 lm	Luminaire Power	34.0 W	Efficacy	133.441 lm/W	Efficiency	100.00%
Source Flux	4537 lm	Maximum value	201.30 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1184 mm	Width	45 mm	Height	85 mm
Rectangular Luminous Area		Length	1176 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area		0.047040 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.011380 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		26-02-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4537 lm	
LED Flux=5933lm LED Power=31W Eff=76% EfcLed=193lm/W EfcLum=133lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	49 80 96 52 100			D DIN 5040		C31	
F UTE	0.52 E + 0.48 T			B NBN		BZ 4	


1184mm x 45mm



Semipiani C

180.0 — 0.0  
 270.0 — 90.0

ULOR 47.68 %  
 DLOR 52.32 %  
 RN 47.68 %

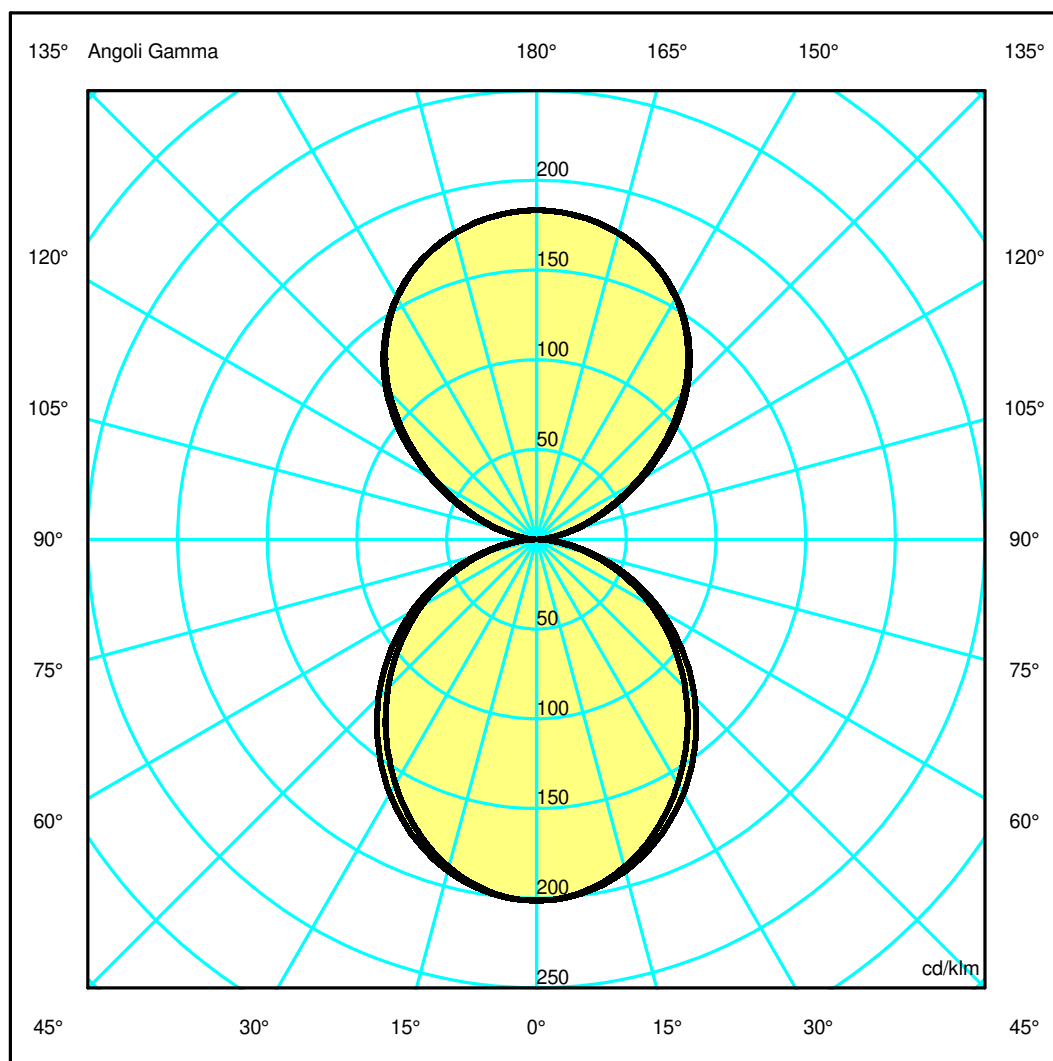

## Luminaire

Code AT19301+AT09505  
Name A.39 SOSP DIR/IND 1184MM 840 ND BCO

## Measurment.


Code FTS1801069-A  
Name A.39 SOSP DIR/IND 1184MM 840 ND BCO

Luminaire Flux	4537 lm	Luminaire Power	34.0 W	Efficacy	133.441 lm/W	Efficiency	100.00%
Source Flux	4537 lm	Maximum value	201.30 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1184 mm	Width	45 mm	Height	85 mm
Rectangular Luminous Area		Length	1176 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area		0.047040 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.011380 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		26-02-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4537 lm	
LED Flux=5933lm LED Power=31W Eff=76% EfcLed=193lm/W EfcLum=133lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	49 80 96 52 100			D DIN 5040	C31		
F UTE	0.52 E + 0.48 T			B NBN	BZ 4		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.23	2.45	3.68	4.91	6.13	OC	1.34	2.67	4.01	5.35	6.69
OB	1.23	2.45	3.68	4.91	6.13	OD	1.34	2.67	4.01	5.35	6.69

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	913.32	906.82	857.56	768.50	655.80	531.38	401.06	269.82	139.41	33.24
OB	913.32	906.82	857.56	768.50	655.80	531.38	401.06	269.82	139.41	33.24
OC	913.32	908.30	867.76	790.48	687.63	564.93	431.32	294.28	155.62	40.65
OD	913.32	908.30	867.76	790.48	687.63	564.93	431.32	294.28	155.62	40.65

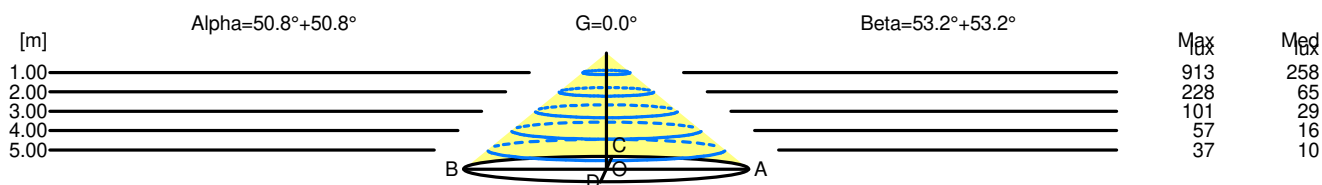

H[m]	D[m]	Max lux	Med lux	Alpha=50.8°+50.8°	G=0.0
1.00	2.45	913	258		
2.00	4.91	228	65		
3.00	7.36	101	29		
4.00	9.81	57	16		
5.00	12.27	37	10		

H[m]	D[m]	Max lux	Med lux	Beta=53.2°+53.2°	G=0.0
1.00	2.67	913	258		
2.00	5.35	228	65		
3.00	8.02	101	29		
4.00	10.70	57	16		
5.00	13.37	37	10		