

## Luminaire


Code AT19601  
Name A.39 DIR/IND CTRL EMIS 1184MM 840 DM BCO

## Measurerm.

Code FTS1801890-A  
Name A.39 DIR/IND CTRL EMIS 1184MM 840 DM BCO

Luminaire Flux	5214 lm	Luminaire Power	57.0 W	Efficacy	91.474 lm/W	Efficiency	100.00%
Source Flux	5214 lm	Maximum value	241.94 cd/klm	Position	C=75.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1184 mm	Width	45 mm	Height	85 mm
Rectangular Luminous Area		Length	1176 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area		0.047040 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.011380 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		03-03-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5214 lm	
LED Flux=8618lm LED Power=48W Eff=61% EfcLed=181lm/W EfcLum=91lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	71 97 99 40 100			D DIN 5040		D62	
F UTE	0.40 B + 0.60 T			B NBN		BZ 2	

1184mm x 45mm




Semipiani C

180.0 ——— 0.0  
270.0 ——— 90.0

ULOR 59.95 %

DLOR 40.05 %

RN 59.95 %

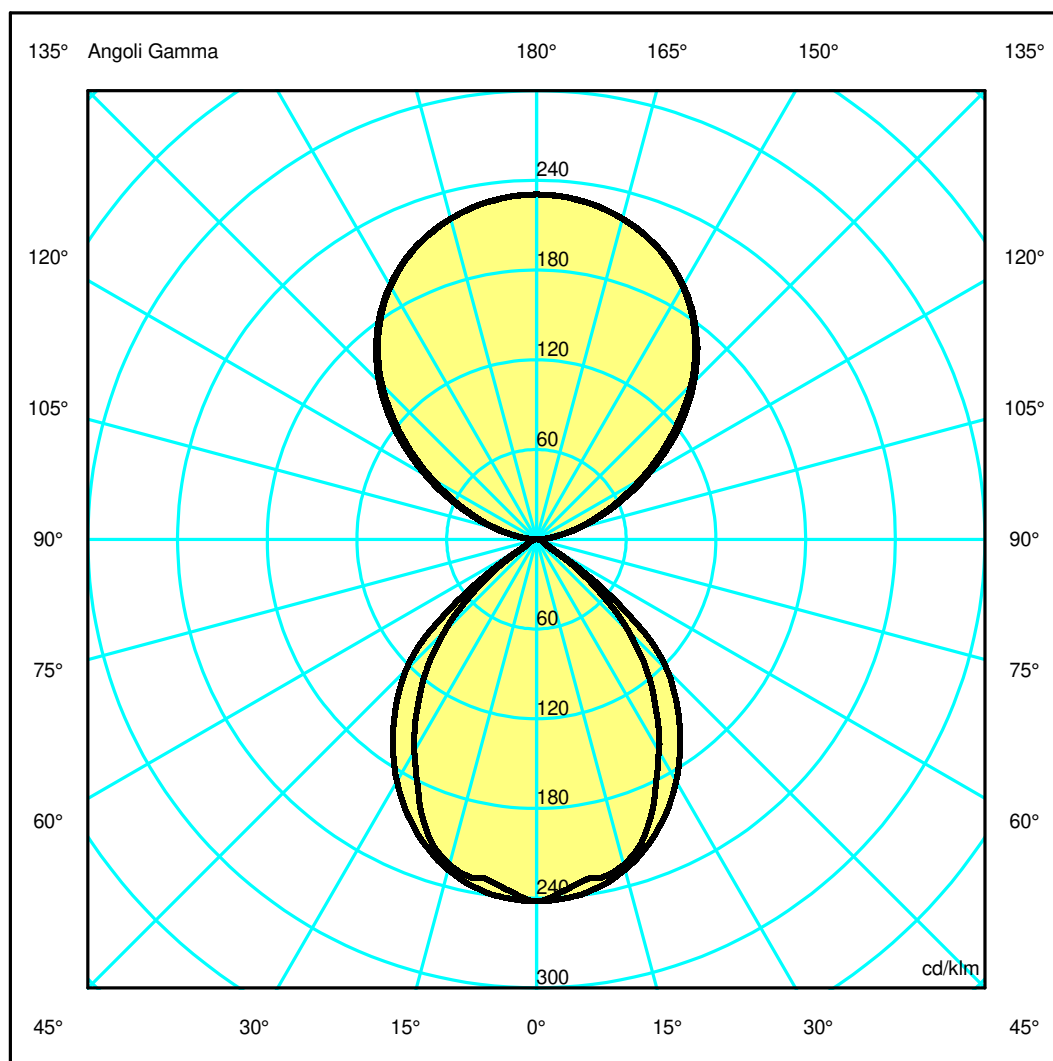

## Luminaire

Code AT19601  
Name A.39 DIR/IND CTRL EMIS 1184MM 840 DM BCO

## Measurment.


Code FTS1801890-A  
Name A.39 DIR/IND CTRL EMIS 1184MM 840 DM BCO

Luminaire Flux	5214 lm	Luminaire Power	57.0 W	Efficacy	91.474 lm/W	Efficiency	100.00%
Source Flux	5214 lm	Maximum value	241.94 cd/klm	Position	C=75.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1184 mm	Width	45 mm	Height	85 mm
Rectangular Luminous Area		Length	1176 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area		0.047040 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.011380 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		03-03-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5214 lm	
LED Flux=8618lm LED Power=48W Eff=61% EfcLed=181lm/W EfcLum=91lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	71 97 99 40 100			D DIN 5040	D62		
F UTE	0.40 B + 0.60 T			B NBN	BZ 2		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.81	1.61	2.42	3.22	4.03	OC	1.02	2.03	3.05	4.07	5.08
OB	0.81	1.61	2.42	3.22	4.03	OD	1.02	2.03	3.05	4.07	5.08

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1261.26	1224.54	1174.81	975.81	725.45	453.67	138.26	30.50	15.51	4.35
OB	1261.26	1224.54	1174.81	975.81	725.45	453.67	138.26	30.50	15.51	4.35
OC	1261.26	1254.58	1192.80	1061.64	873.27	643.96	209.68	36.78	20.78	4.87
OD	1261.26	1254.58	1192.80	1061.64	873.27	643.96	209.68	36.78	20.78	4.87

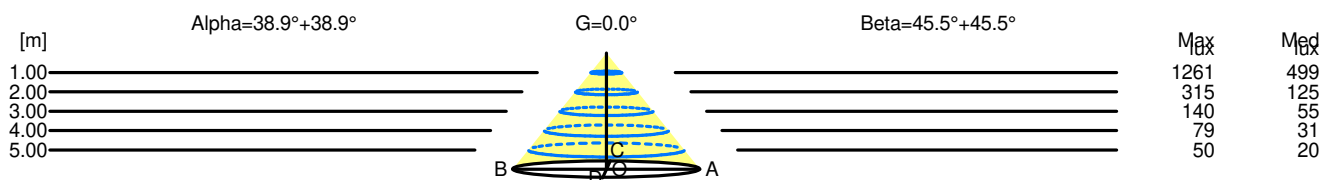

H[m]	D[m]	Max lux	Med lux	Alpha=38.9°+38.9°	G=0.0
1.00	1.61	1261	499		
2.00	3.22	315	125		
3.00	4.83	140	55		
4.00	6.44	79	31		
5.00	8.06	50	20		

H[m]	D[m]	Max lux	Med lux	Beta=45.5°+45.5°	G=0.0
1.00	2.03	1261	499		
2.00	4.07	315	125		
3.00	6.10	140	55		
4.00	8.13	79	31		
5.00	10.16	50	20		