


Luminaire

Code BB02004_25
Name LUCERI TRIM MAX46W 930 MIRROR BLACK

Measurerm.

Code FTS1801177-A
Name LUCERI TRIM MAX46W 930 MIRROR BLACK

Luminaire Flux	2838 lm	Luminaire Power	25.0 W	Efficacy	113.520 lm/W	Efficiency	100.00%
Source Flux	2838 lm	Maximum value	777.10 cd/klm	Position	C=0.00 G=20.00	CG	Rotosymmetrical
Round Luminaire		Diam.	211 mm	Height	215 mm		
Round Luminous Area		Diam.	200 mm	Height	0 mm		
Horizontal Luminous Area				Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°		0.031416 m2		Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°			0.007600 m2
Coordinate system		CG		Symmetry Type			Rotosymmetrical
Date		25-03-2025		Maximum Gamma Angle			180
Measurement Distance		0.00		Measurement Flux			2838 lm
LED Flux=3416lm LED Power=25W Eff=83% EfcLed=137lm/W EfcLum=114lm/W CCT=3000K Ra=90 R9=50 SDCM=1 L70(10k)=50000h							
C.I.E.	91 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

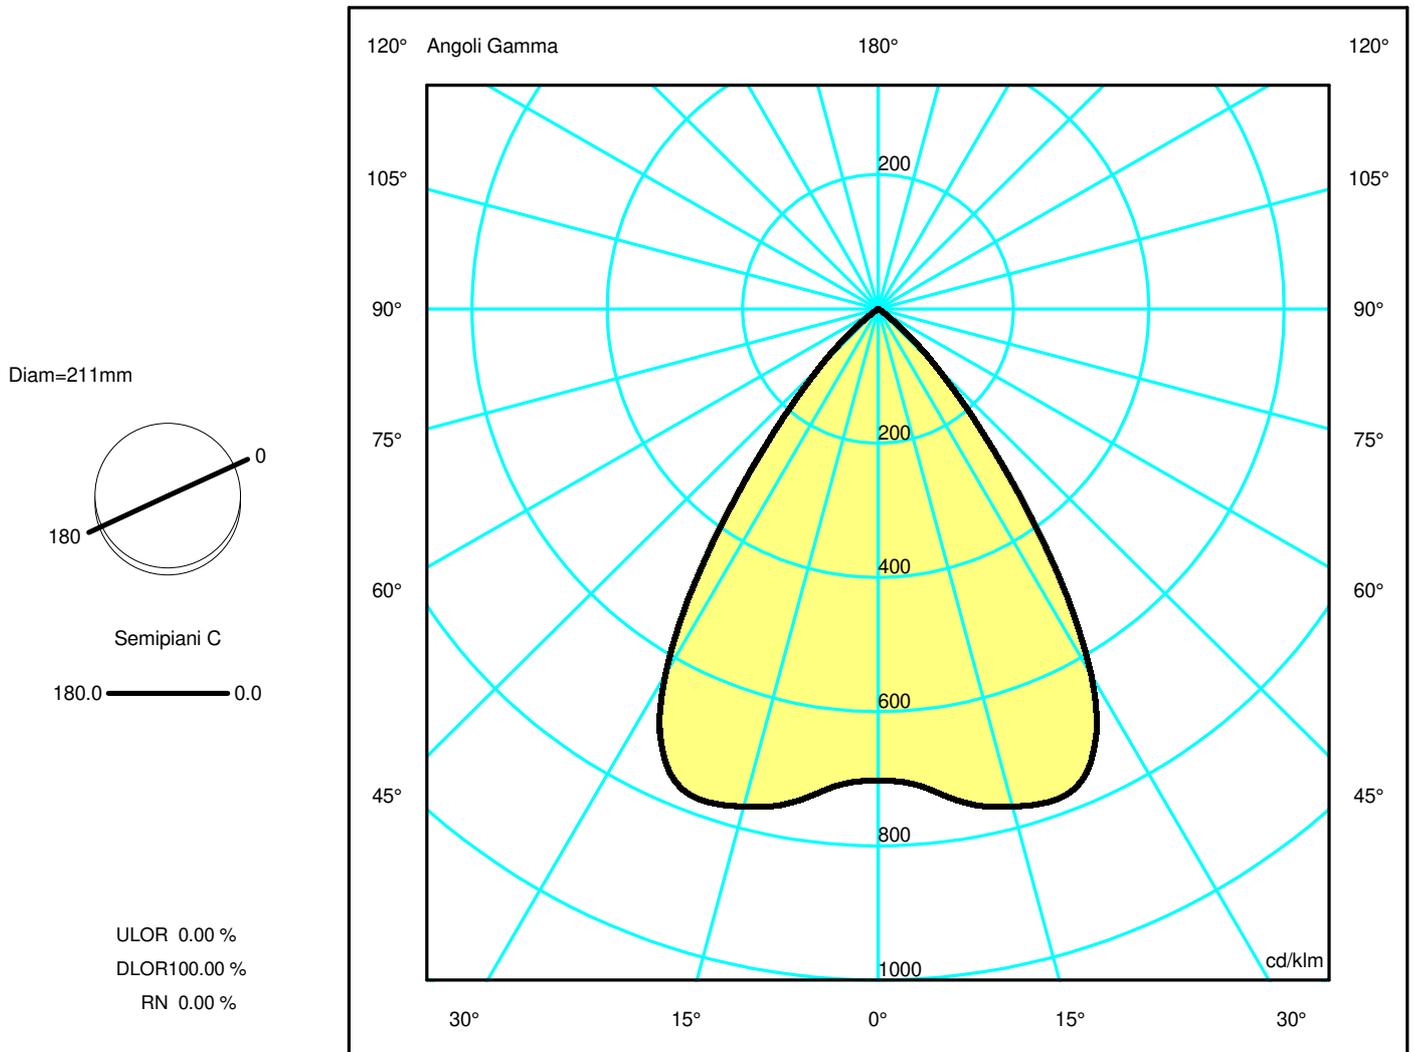

Luminaire

Code BB02004_25
Name LUCERI TRIM MAX46W 930 MIRROR BLACK

Measurerm.


Code FTS1801177-A
Name LUCERI TRIM MAX46W 930 MIRROR BLACK

Luminaire Flux	2838 lm	Luminaire Power	25.0 W	Efficacy	113.520 lm/W	Efficiency	100.00%
Source Flux	2838 lm	Maximum value	777.10 cd/klm	Position	C=0.00 G=20.00	CG	Rotosymmetrical
Round Luminaire		Diam.	211 mm	Height	215 mm		
Round Luminous Area		Diam.	200 mm	Height	0 mm		
Horizontal Luminous Area		0.031416 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.007600 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		25-03-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2838 lm	
LED Flux=3416lm LED Power=25W Eff=83% EfcLed=137lm/W EfcLum=114lm/W CCT=3000K Ra=90 R9=50 SDCM=1 L70(10k)=50000h							
C.I.E.	91 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.72	1.45	2.17	2.90	3.62	OC	0.72	1.45	2.17	2.90	3.62
OB	0.72	1.45	2.17	2.90	3.62	OD	0.72	1.45	2.17	2.90	3.62

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1994.07	2024.01	2178.35	2111.33	1218.84	342.12	26.02	2.25	1.76	0.19
OB	1994.07	2024.01	2178.35	2111.33	1218.84	342.12	26.02	2.25	1.76	0.19
OC	1994.07	2024.01	2178.35	2111.33	1218.84	342.12	26.02	2.25	1.76	0.19
OD	1994.07	2024.01	2178.35	2111.33	1218.84	342.12	26.02	2.25	1.76	0.19

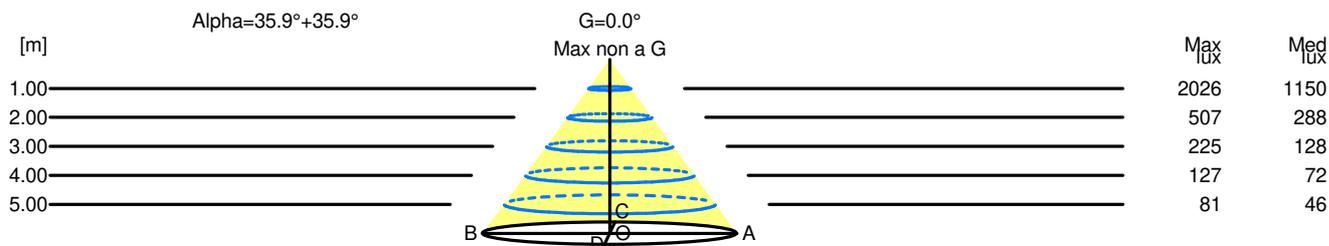

H[m]	D[m]	Max lux	Med lux	Alpha=35.9°+35.9°	G=0.0 Max non a G
1.00	1.45	2026	1150		
2.00	2.90	507	288		
3.00	4.35	225	128		
4.00	5.80	127	72		
5.00	7.25	81	46		